


Project Name _____

Qty _____

Type _____ Catalog / Part Number _____

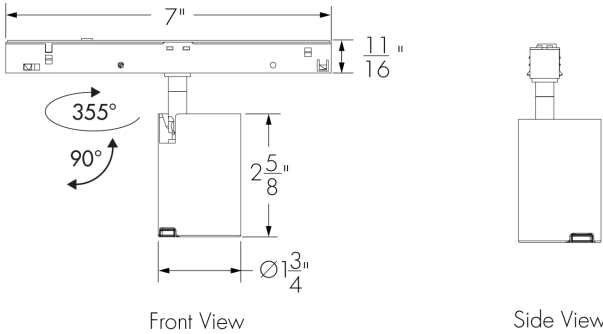

Photometric Summary

Consult the Photometric Information section of the Specification Sheet for 3000K CRI 92 data. For all other configurations, consult IES files on the Lumenpulse website.

Color and Color Temperature




Color Rendering

CRI 92 CRI 98

Control

1-10V DALI

Finish

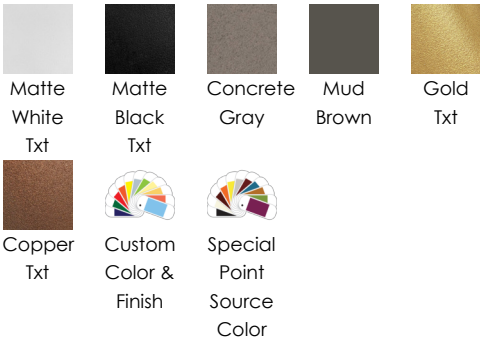

Description

The low-voltage REVO SPOT 48V Small keeps things neat and tidy while delivering the type of performance usually associated with much larger luminaires. The low-voltage system's advantages include smaller, inconspicuous tracks, tiny luminaires, concealed adapters, greater efficiency, and a Class II protection rating, which makes it safe to install without protective measures needed.


Features

Output (Nominal Lumens)	L02: 200 lm
	L03: 300 lm
	L04: 400 lm
	L05: 500 lm
	L07: 700 lm
Color and Color Temperature	27K: 2700K
	30K: 3000K
	35K: 3500K
	40K: 4000K
Finish	MWHTX: Matte White Txt
	MBKTX: Matte Black Txt
	CGY: Concrete Gray
	MDB: Mud Brown
	GTX: Gold Txt
	CTX: Copper Txt
	CC: Custom Color and Finish (Please Specify RAL Color)
	SP: Special Color (Choose From standard Point Source Color Palette)
Track Adapter Finish	AWH: Matte White
	ABK: Matte Black

Track Adapter Finish



Adjustability



Lumencycle™ Program



Certifications



Optic (Nominal Distribution)	VN: Very Narrow 7° NS: Narrow Spot 12° ENS: Elliptical Narrow Spot 54° x 12° S: Spot 15° NF: Narrow Flood 25° FL: Flood 35° WFL: Wide Flood 40° EWFL: Elliptical Wide Flood 47° x 72°
Optical Accessories	Various optical accessories available, see Optical Accessories Section for details
Warranty	5-year limited warranty
Performance	
Maximum Delivered Output	Up to 945 lm (L07, CRI 92, 40K, FL)
Maximum Delivered Intensity	9,724 cd at nadir (L02, CRI 92, 40K, VN)
Efficacy	Up to 107 lm/W (L02, CRI 92, 40K, VN)
Color Rendering	92: CRI 92 98: CRI 98
Color Consistency	2 SDCM
Lumen Maintenance	L70 120,000 hours L95 19,000 hours
UGR	Optical configurations available to achieve <10 UGR. See IES files for performance data based on exact configurations.
Physical	
Housing Material	Extruded aluminum
Optics Material	Polymethyl methacrylate (PMMA)
Accessory Material	Nylon PA12 (accessory primary ring, and frame only)
Weight	0.82 lbs (fixture only)
Adjustability	355° Rotation, 90° Tilt
Electrical and Control	
Voltage	48: 48 Volts
Wattage Range	3.3 to 10 Watts Refer to the Wattage Information section for more information.
Control	DIM: 1-10V Dimming 1% DALI: DALI Dimming 1%
Track Mounting	48V Low voltage track required, refer to A.A.G Stucchi MULTISYSTEM® product page and specification sheet for compatible track system and accessories
Environmental	
Ingress Protection Rating	IP40
Environment	Damp location (interior applications only)

Operating Temperature	-4 °F to 86 °F
Accessories (Order Separately)	
Leader Cable	T48PSULC: Track 48V PSU Enclosure Leader Cable Multiple lengths available
Power Supply Box	T48PSU: Track 48V PSU Enclosure Surface track and recessed track configurations available
Wiring Box	T48WB: Track 48V Wiring Box Enclosure Surface and track mount configurations available
Rough-In Tray	T48PSURI: Track 48V PSU Enclosure Rough-In Kit Surface and track mount configurations available

Important

Virtual Patent Marking Notice


This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Lumencycle™ Program


Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.

Photometric Information


Spot, L07, 3000K, CRI 92

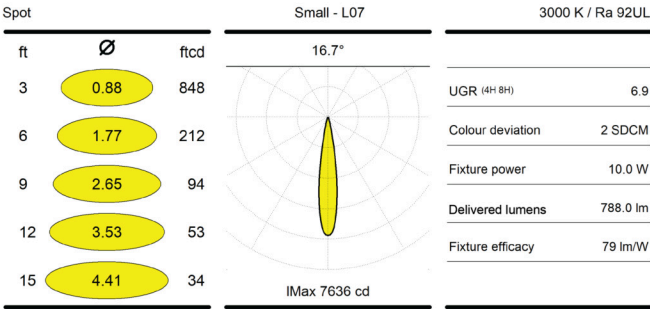


Narrow Flood, L07, 3000K, CRI 92

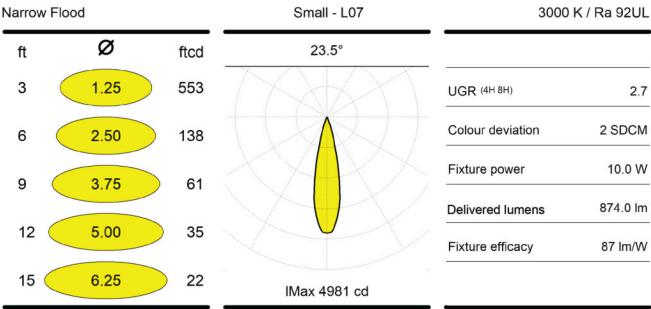

Flood, L07, 3000K, CRI 92

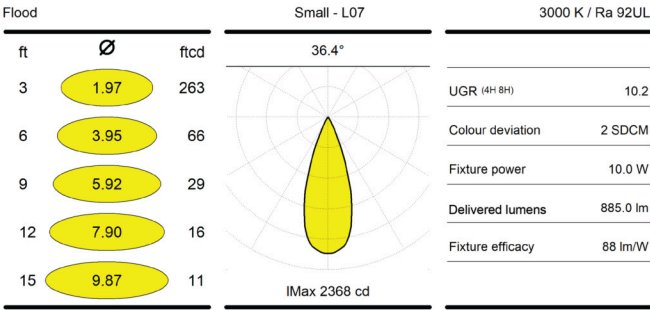

Wide Flood, L07, 3000K, CRI 92

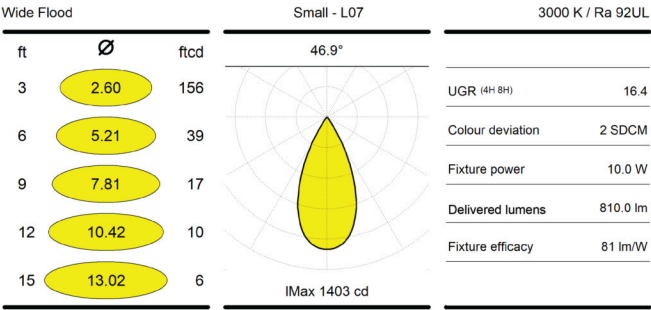

For all other configurations, consult IES files on the Lumenpulse website.

Wattage Information

L02 - Output

VN	Very Narrow	3.3W
NS	Narrow Spot	4.5W
ENS	Elliptical Narrow Spot	

L03 - Output

EWFL	Elliptical Wide Flood	4.7W
NS	Narrow Spot	6.7W
ENS	Elliptical Narrow Spot	

L04 - Output

S	Spot	4.7W
NF	Narrow Flood	
FL	Flood	
WFL	Wide Flood	
EWFL	Elliptical Wide Flood	6.8W

L05 - Output

S	Spot	6.8W
NF	Narrow Flood	
FL	Flood	
WFL	Wide Flood	
EWFL	Elliptical Wide Flood	10W

L07 - Output

S	Spot	10W
NF	Narrow Flood	
FL	Flood	
WFL	Wide Flood	

Optical Accessories

HL - Honeycomb



SN - Snoot



VS - Visor




EL - Elliptical Lens



Factory installed.

Dimming Curve

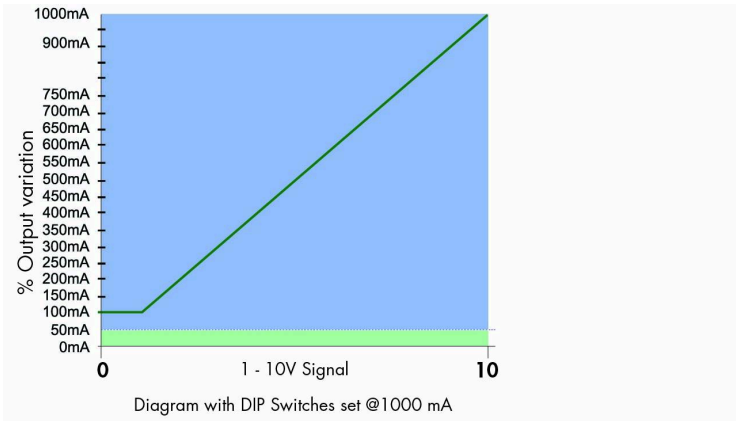

How to Order

Housing	Size	Voltage	Track Adapter Type	Control	Output (Nominal Lumens)	Finish	Track Adapter Finish	Color Rendering	Color and Color Temperature	Optic (Nominal Distribution)	Accessories
T48RS REVO SPOT 48 lx	SM Small	48 48 Volts ⁽¹⁾	LVT Low Voltage Track ⁽²⁾	DIM 1-10V Dimming 1% DALI DALI Dimming 1%	L02 200 lm ⁽³⁾	MWHTX Matte White Txt	AWH Matte White	92 CRI 92	27K 2700K	VN Very Narrow 7°	NA No Accessory
					L03 300 lm ⁽⁴⁾	MBKTX Matte Black Txt	ABK Matte Black	98 CRI 98 ⁽⁹⁾	30K 3000K	NS Narrow Spot 12°	HL Honeycomb ⁽¹¹⁾
					L04 400 lm ⁽⁵⁾	CGY Concrete Gray			35K 3500K	ENS Elliptical Narrow Spot 54° x 12° ⁽¹⁰⁾	SN Snoot ⁽¹¹⁾
					L05 500 lm ⁽⁵⁾	MDB Mud Brown			40K 4000K	S Spot 15°	VS Visor ⁽¹¹⁾
					L07 700 lm ⁽⁴⁾	GTX Gold Txt				NF Narrow Flood 25°	EL Elliptical Lens ⁽¹²⁾
						CTX Copper Txt				FL Flood 35°	
						CC Custom Color & Finish ⁽⁷⁾				WFL Wide Flood 40°	
						SP Special Point Source Color ⁽⁸⁾				EWFL Elliptical Wide Flood 47° x 72° ⁽¹⁰⁾	

Notes:

1. Remote Power Supply enclosure required, but not included. 48V Wiring Box also available, but not included. Consult factory and Exenia Track product section for more information.

2. Track and track accessories are sold separately. Refer to A.A.G. Stucchi MULTISYSTEM® EVO product page and specification sheet for compatible track system.

3. Available for VN, NS and ENS optics only.

4. Available for NS, ENS and EWFL optics only.

5. Available for S, NF, FL, WFL and EWFL optics only.
6. Available for S, NF, FL and WFL optics only.

7. Longer lead times can be expected for custom RAL color finishes.

8. Refer to Cylinder specification sheet and brochure for color options.

9. Available for S, NF, FL, WFL and EWFL optics only.

10. Cannot be combined with accessories.

11. Available for VN, NS, S, NF, FL and WFL optics only.

12. Available for VN, S, NF and FL optics only.