


Project Name


Type

Catalog / Part Number

Qty



Front View



Side View

Photometric Summary

Consult the Photometric Information section of the Specification Sheet for 3000K CRI 92 data. For all other configurations, consult IES files on the Lumenpulse website.

Color and Color Temperature



Color Rendering

CRI92


CRI98

Control

1-10V

DALI

Finish

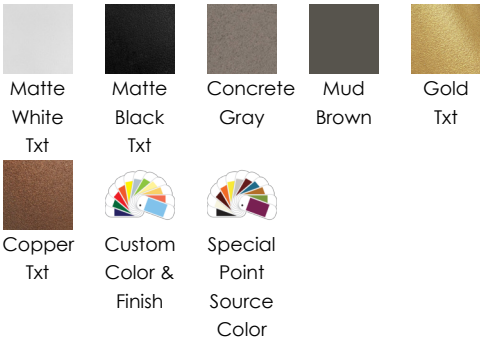

Description

The low-voltage REVO SPOT 48V Medium Wallwash keeps things neat and tidy while delivering the type of performance usually associated with much larger luminaires. The REVO SPOT's grazing washer provides uniform coverage while calling out the texture of the wall. The low-voltage system's advantages include smaller, inconspicuous tracks, tiny luminaires, concealed adapters, greater efficiency, and a Class II protection rating, which makes it safe to install without protective measures needed.


Features

Output (Nominal Lumens)	L07: 700 lm
	L10: 1000 lm
	L13: 1300 lm
Color and Color Temperature	27K: 2700K
	30K: 3000K
	35K: 3500K
	40K: 4000K
Finish	MWHTX: Matte White Txt
	MBKTX: Matte Black Txt
	CGY: Concrete Gray
	MDB: Mud Brown
	GTX: Gold Txt
	CTX: Copper Txt
	CC: Custom Color and Finish (Please Specify RAL Color)
Track Adapter Finish	SP: Special Color (Choose From standard Point Source Color Palette)
Track Adapter Finish	AWH: Matte White
	ABK: Matte Black
Optic (Nominal Distribution)	DW: Deep Washer
Warranty	5-year limited warranty

Track Adapter Finish



Adjustability



Lumencycle™ Program



Certifications



Performance

Maximum Delivered Output	Up to 1,578 lm (L13, CRI 92, 40K, DW)
Maximum Delivered Intensity	3,660 cd at nadir (L13, CRI 92, 40K, DW)
Efficacy	Up to 89 lm/W (L07, CRI 92, 40K, DW)
Color Rendering	92: CRI 92 98: CRI 98
Color Consistency	2 SDCM
Lumen Maintenance	L70 120,000 hours L95 19,000 hours

Physical

Housing Material	Die cast aluminum
Optics Material	Polymethyl methacrylate (PMMA)
Weight	2.05 lbs (fixture only)
Adjustability	355° Rotation, 90° Tilt

Electrical and Control

Voltage	48: 48 Volts
Wattage Range	9.3 to 19.4 Watts Refer to the Wattage Information section for more information.
Control	DIM: 1-10V Dimming 1% DALI: DALI Dimming 1%
Track Mounting	48V Low voltage track required, refer to A.A.G Stucchi MULTISYSTEM® product page and specification sheet for compatible track system and accessories

Environmental

Ingress Protection Rating	IP40
Environment	Damp location (interior applications only)
Operating Temperature	-4 °F to 86 °F

Accessories (Order Separately)

Leader Cable	T48PSULC: Track 48V PSU Enclosure Leader Cable Multiple lengths available
Power Supply Box	T48PSU: Track 48V PSU Enclosure Surface track and recessed track configurations available
Wiring Box	T48WB: Track 48V Wiring Box Enclosure Surface and track mount configurations available
Rough-In Tray	T48PSURI: Track 48V PSU Enclosure Rough-In Kit Surface and track mount configurations available

Important


Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Lumencycle™ Program


Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.

Deep Washer Guidelines (Spacing and Setback)

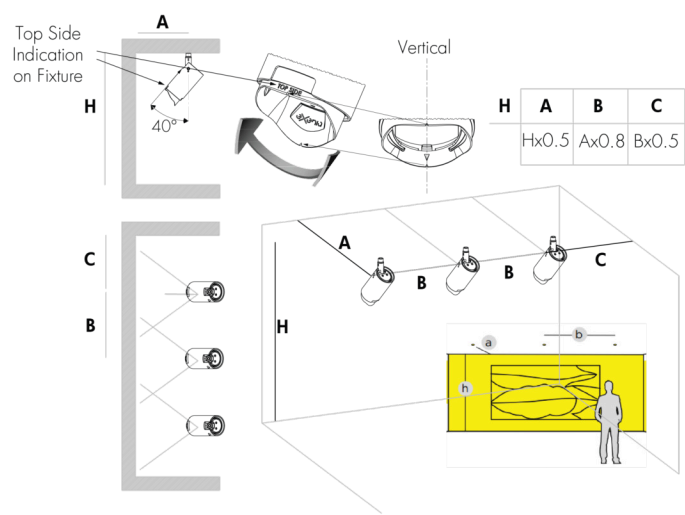

Photometric Information

Deep Washer L13, 3000K, CRI 92

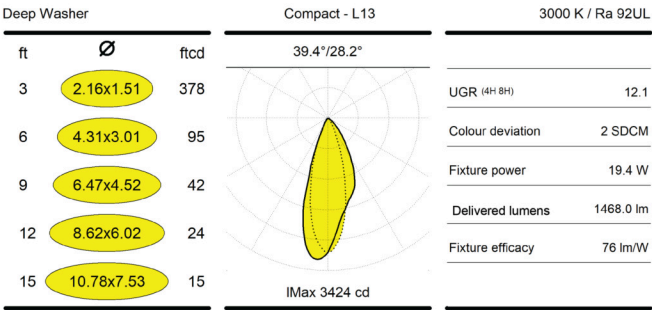

For all other configurations, consult IES files on the Lumenpulse website.

Wattage Information

L07 - Output

DW	Deep Washer	9.3W
----	-------------	------


L10 - Output

DW	Deep Washer	13.3W
----	-------------	-------

L13 - Output

DW	Deep Washer	19.4W
----	-------------	-------

Dimming Curve

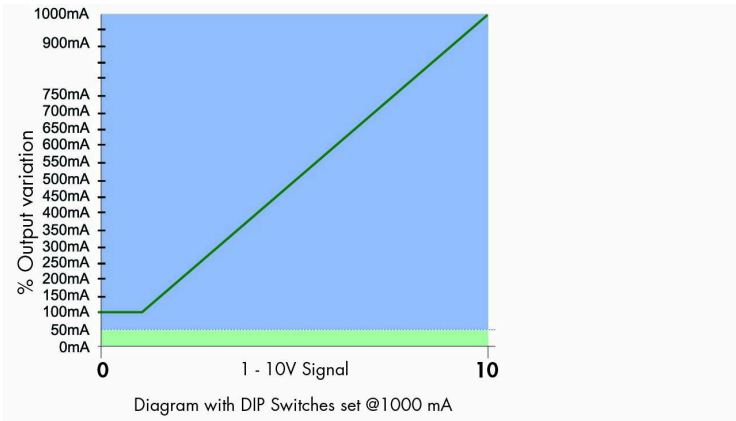

How to Order

Housing	Size	Voltage	Track Adapter Type	Control	Output (Nominal Lumens)	Finish	Track Adapter Finish	Color Rendering	Color and Color Temperature	Optic (Nominal Distribution)	Accessories
T48RS REVO SPOT 48 lx	C Compact	48 48 Volts ⁽¹⁾	LVT Low Voltage Track ⁽²⁾	DIM 1-10V Dimming 1% DALI DALI Dimming 1%	L07 700 lm L10 1000 lm L13 1300 lm	MWHTX Matte White Txt MBKTX Matte Black Txt CGY Concrete Gray MDB Mud Brown GTX Gold Txt CTX Copper Txt CC Custom Color & Finish ⁽³⁾ SP Special Point Source Color ⁽⁴⁾	AWH Matte White Finish ABK Matte Black	92 CRI 92 98 CRI 98	27K 2700K 30K 3000K 35K 3500K 40K 4000K	DW Deep Washer	NA No Accessory

Notes:

1. Remote Power Supply enclosure required, but not included. 48V Wiring Box also available, but not included. Consult factory and Exenia Track product section for more information.
2. Track and track accessories are sold separately. Refer to A.A.G. Stucchi MULTISYSTEM® EVO product page and specification sheet for compatible track system.
3. Longer lead times can be expected for custom RAL color finishes.
4. Refer to Cylinder specification sheet and brochure for color options.