



Project Name _____ Qty _____

Type _____ Catalog / Part Number _____

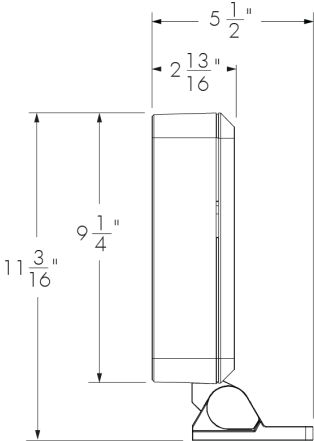

Side View

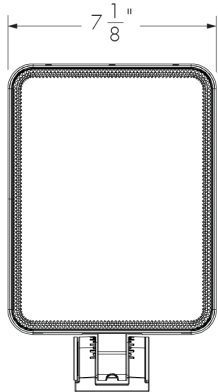

Front View

Photometric Summary

Symmetric

	Delivered output (lm)	Intensity (peak cd)
XN (3°)	2,381	331,811
VN (6°)	1,888	99,894
NS (10°)	2,714	38,895
NF (20°)	2,567	24,613
M (30°)	2,490	13,855
FL (40°)	2,252	5,837
WFL (60°)	2,020	1,520
VWFL (90°)	1,960	973

Asymmetric

	Delivered output (lm)	Intensity (peak cd)
NAS	1,726	28,602 (@2.5°)
WW	2,363	3,940 (@5°)

Roadway

	Delivered output (lm)	BUG rating
2-Type II	1,882	B:1 U:0 G:1
3-Type III	2,011	B:1 U:0 G:1
4-Type IV	1,663	B:1 U:0 G:1
5S-Type VS	1,967	B:1 U:0 G:0

1. Based on 4000K.

2. Photometric performance is measured in compliance with IESNA LM-79-24.

3. Refer to IES files for photometric information on distributions with backlight shield options (2BLS, 3BLS and 4BLS).

4. Refer to the Lumenquad White and Static Colors Photometric Guide on Lumenpulse website for information on other color temperatures.

Description

The Lumenquad Medium, 28W LED luminaire, has a sleek 2 13/16 in profile with no visible wiring or hardware and seamlessly integrates with any architecture. Lumenpulse's latest generation of LED boards possess an optimised candela and lumens recipe for both Narrow and Wide optics. The Lumenquad Medium is the epitome of versatility and can be configured with numerous options including optics for wallwash, floodlighting, or street lighting, a choice of colour temperatures and colours, as well as various mounting options, accessories, controls, and multiple standard finishes.

Features

Color and Color Temperature

22K: 2200K, **27K:** 2700K, **30K:** 3000K, **35K:** 3500K, **40K:** 4000K, **57K:** 5700K, **RD:** Red, **GR:** Green, **BL:** Blue

Optics (Nominal Distribution)

XN: Extra Narrow 3°, **VN:** VN (6°), **NS:** NS (10°), **NF:** NF (20°), **M:** M (30°), **FL:** FL (40°), **WFL:** WFL (60°), **VWFL:** VWFL (90°), **NAS:** NAS (Narrow Asymmetric), **WW:** WW (Asymmetric Wallwash), **2:** Type II, **2BLS:** Type II Backlight Shield, **3:** Type III, **3BLS:** Type III Backlight Shield, **4:** Type IV, **4BLS:** Type IV Backlight Shield, **5S:** Type VS

Mounting Options

SM: Surface Mount, **WM:** Wall Mount Bracket with Decorative Cover, **WMNC:** Wall Mount Bracket without Decorative Cover, **RJBOX:** Recessed JBOX Wall Mount with Decorative Cover, **RJBOXNC:** Recessed JBOX Wall Mount Without Decorative Cover, **PM:** Pole Mount, **TN:** Tenon Mount, **SK:** Stake Mount, **STM:** Stud mount

Optical Options (Factory Installed)

LSLH: Linear Spread Lens Horizontal Distribution, **LSLV:** Linear Spread Lens Vertical Distribution, **HL:** Honeycomb Louver

Option

CRC: Corrosion-Resistant Coating for Hostile Environments


Power Consumption

28W


Warranty

5-year limited warranty

Optic

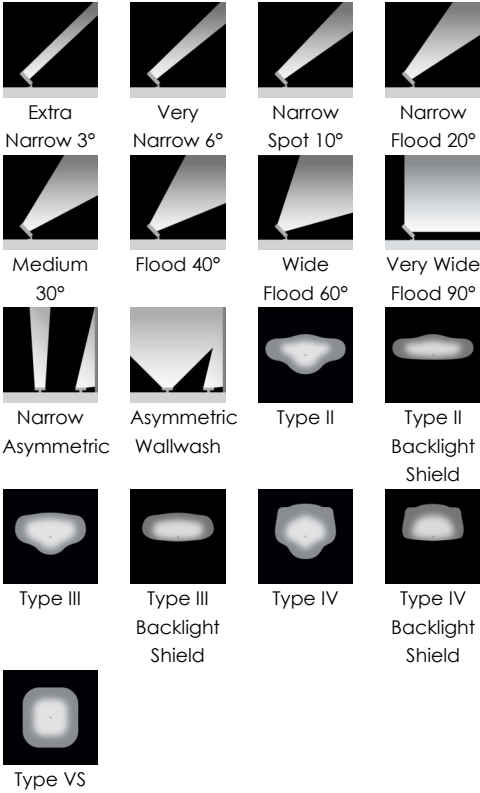

Color and Color Temperature

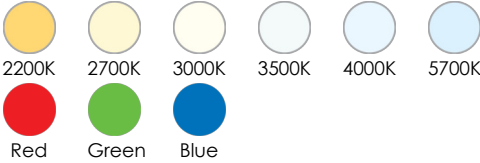

Control



Ratings

IP66 IK10

Lumencycle™ Program



Certifications



Performance

Maximum Delivered Output	2,714 lm (4000K, NS 10°)
Maximum Delivered Intensity	331,811 cd at nadir (4000K, XN 3°)
Illuminance at Distance	Minimum 1 fc at 578 ft (4000K, XN 3°)
Color Consistency	3 SDCM
Color Rendering	CRI 80+
Lumen Maintenance	L70 > 250,000 hrs (Ta 25 °C) (> 80,000 hrs for XN 3°, VN 6°, NAS optics only)

Physical

Housing Material	Low copper content high pressure die-cast aluminum
Lens Material	Clear tempered glass
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	8.58 lbs
EPA	Front = 0.58 ft², Side = 0.26 ft², Front 45°= 0.56 ft²

Electrical and Control

Voltage	120-277 Volts
Fixture Cable	Power and data in one cable
Conductors	3C #16-3 (NO control) 5C #16-5 (DIM, DALI control) 6C #14-3/ #24-3 (DMX/RDM control)

Control	On/Off Control, 0-10V Dimming, DALI Dimming, DMX/RDM Enabled, Lumentalk system is enabled with LDB accessory - see typical wiring diagrams for details
---------	--

Resolution (DMX/RDM)	Per fixture, 8-bit or 16-bit
----------------------	------------------------------

Environmental

Storage Temperature	-40 °F to 158 °F (device must reach start-up temperature value before operating)
Start-up Temperature	-13 °F to 122 °F
Operating Temperature	-40 °F to 122 °F
Ingress Protection Rating	IP66 Wet location rated
Impact Resistance Rating	IK10

Application Wind Speed	Luminaires were designed based on AASHTO 2018 (50 ft, 150 mph) standard to ensure highest quality and safety. Installation should be validated by a local project engineer to ensure the luminaires are suitable for the wind speed and exposure of the specific application. Consult factory for zones with higher wind speeds or higher mounting heights.
------------------------	---

Accessories (Order Separately)

Optical Accessories	Snoot, Visor, Linear Spread Lens Adjustable, Wire Guard
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration), Lumentalk Data Bridge
Control Systems	Pharos® Designer Lighting Control Kit (PHAROS), Pharos® Express Control Kit (EXPERT)
Diagnostic and Addressing Tools	LumenID (LID)

Operation and Maintenance

Lumencycle™ Program	Lumencycle-enabled fixtures are designed for serviceability and circular lifecycle management. Lumenpulse will provide factory refurbishment programs, allowing luminaires to be restored and redeployed rather than replaced.
---------------------	---

Important

Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.


Lumencycle™ Program

Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.


Chromaticity Data

TM-30 - 4000K

CCT	CIE	TM-30
4000K	R _a 83 R _g 14	85 96 R _f R _g




Spectral Power Distribution

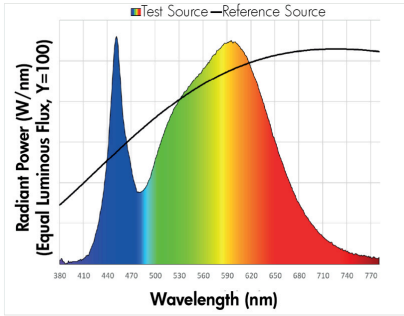


Mounting Options

SM - Surface Mount

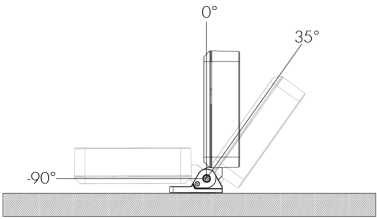


SM - Mounting Hole Pattern

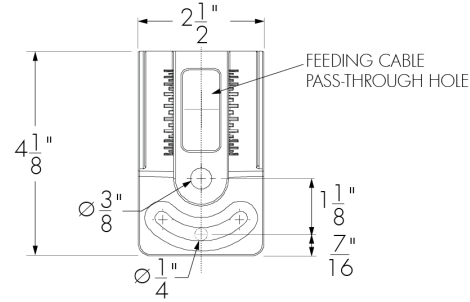


The SM mounting option cannot be interchanged with any other mounting option. All others mountings are interchangeable. Consult factory for details.

WM - Wall Mount Bracket with Decorative Cover




WMNC - Wall Mount Bracket Without Decorative Cover




- A - Dimension from wall to pivot.
- B - Dimension from wall to the geometric center of the fixture.
- C - Dimension from wall to the center of the board.

WAM - Wall Mount Bracket With Decorative Cover
6 in, 12 in, 18 in or 24 in

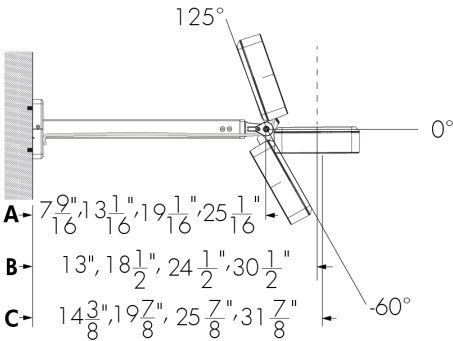


WAMNC - Wall Mount Bracket Without Decorative Cover
Cover 6 in, 12 in, 18 in or 24 in

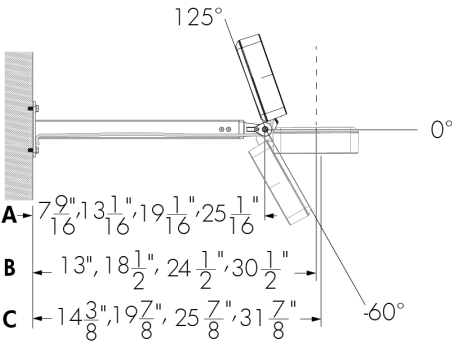


A cable length of 10 ft or greater must be specified for the WAM24 mounting option.

A cable length of 10 ft or greater must be specified for the WAM24 mounting option.

WMRJB - Recessed JBOX Wall Mount With Decorative Cover




WMRJBNC - Recessed JBOX Wall Mount Without Decorative Cover

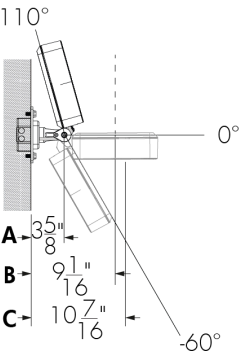


Fixture cable length is determined by Lumenpulse.

Fixture cable length is determined by Lumenpulse.


WAMRJB - Recessed JBOX Wall Arm Mount With
Decorative Cover 6 in, 12 in, 18 in or 24 in

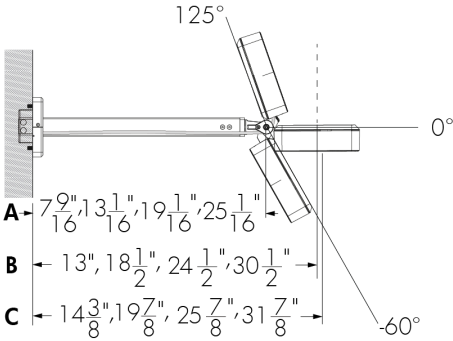


Wall Mount Horizontal Pivot Limits

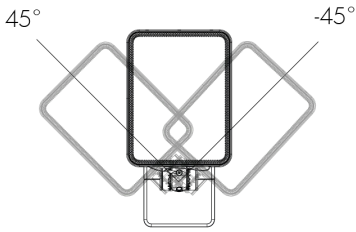

WAMRJBNC - Recessed JBOX Wall Arm Mount
Without Decorative Cover 6 in, 12 in, 18 in or 24 in

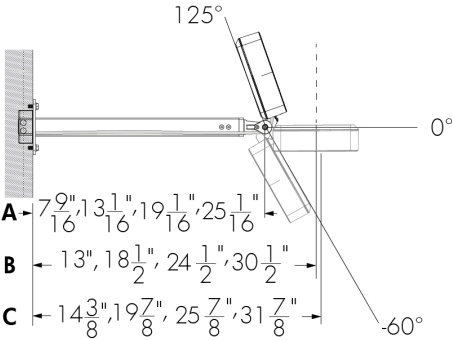

WM, WAM, WMRJB and WAMRJB - Mounting Hole
Pattern

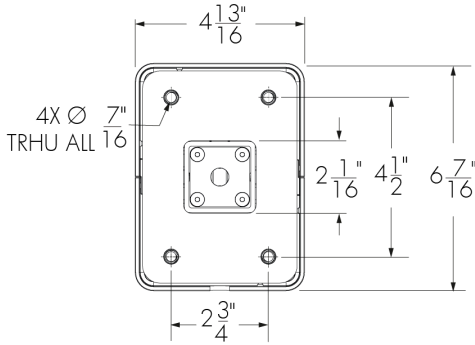


A - Dimension from wall to pivot.


B - Dimension from wall to the geometric center of the fixture.

C - Dimension from wall to the center of the board.

WMNC, WAMNC, WMRJBNC and WAMRJBNC -
Mounting Hole Pattern

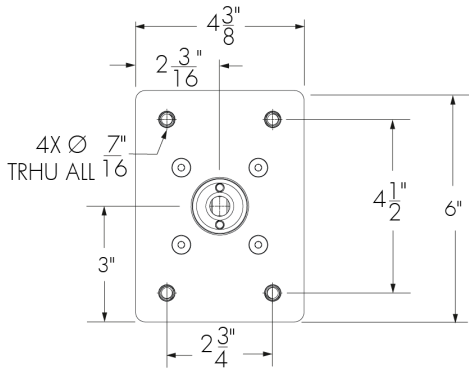


RPM4/1, RPM4.5/1, RPM5/1 - Round Pole Mount

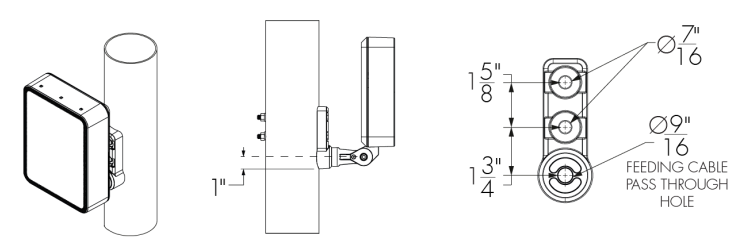


	RPM4/1	RPM4.5/1	RPM5/1
For pole Ø	4" ± 1/16	4.5" ± 1/16	5" ± 1/16
Bolt length	5 1/4	5 3/4	6 1/4

Consult factory for other pole diameters.
Hardware included with accessory.

Round Pole Mount Horizontal Pivot Limits

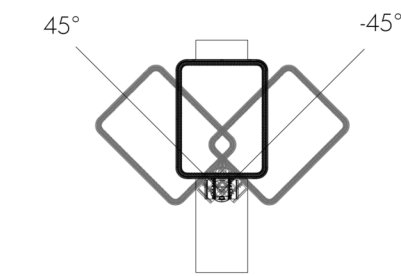


RPM4/2, RPM4.5/2, RPM5/2 - Round Pole Mount For Two Fixtures

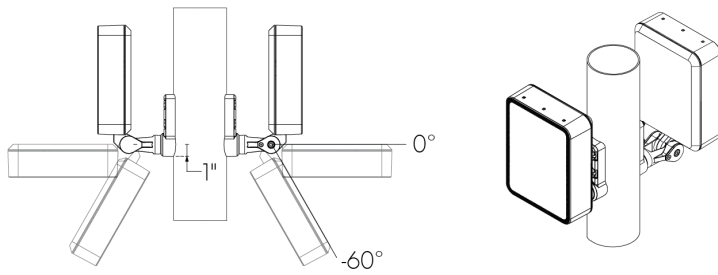

	RPM4/2	RPM4.5/2	RPM5/2
For pole Ø	4" ± 1/16	4.5" ± 1/16	5" ± 1/16
Bolt length	5 3/4	6 1/4	7"

Consult factory for other pole diameters.
Hardware included with accessory.


PLTU - Universal Yoke

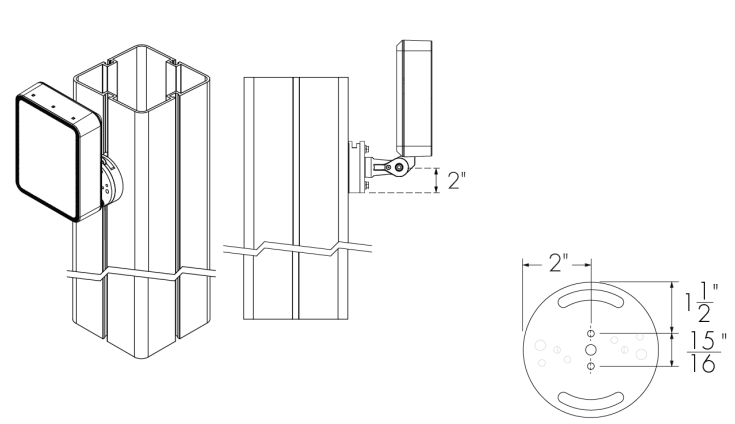

Refer to the Universal Yoke specification sheet and Pole nstallation instructions for more details. Square Lumentech profile shown.


All mounting options (except for SM mounting) are interchangeable. Consult factory for details.

TN2 - Tenon Adapter For 2 3/8 in O.D. Pole

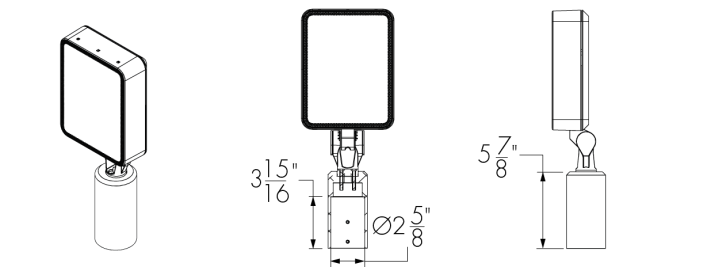


Vertical mounting only. Consult factory for horizontal mounting.

TN4 - Tenon Adapter For 4 in O.D. Pole


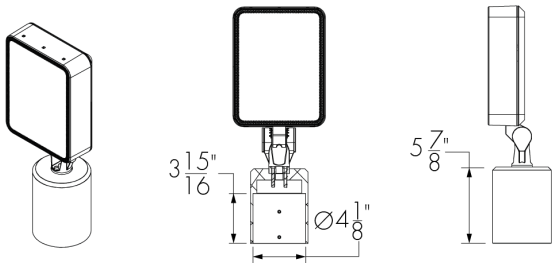


Vertical mounting only. Consult factory for horizontal mounting.



SK - Stake Mount

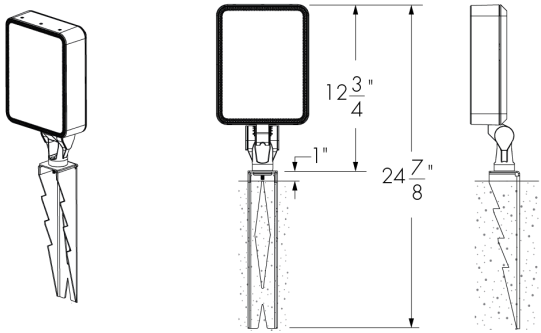

STM - Stud Mount

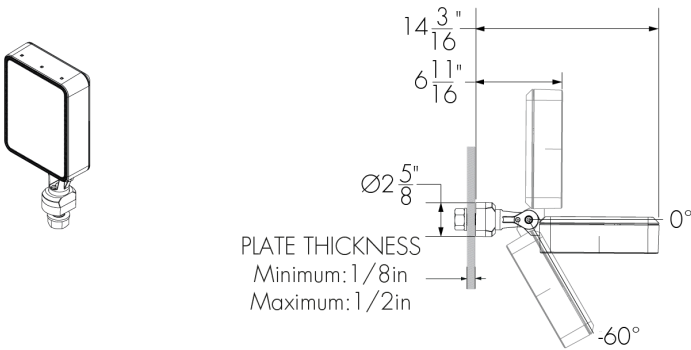

MOUNTING HOLE PATTERN

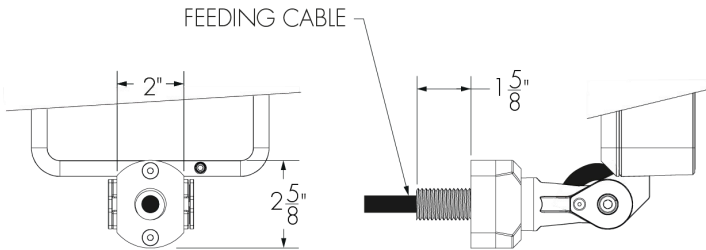

DETAILS


Vertical or horizontal mounting

All mounting options (except for SM mounting) are interchangeable. Consult factory for details.

Optical Options

LSLH - Linear Spread Lens Horizontal Distribution

LSLV - Linear Spread Lens Vertical Distribution

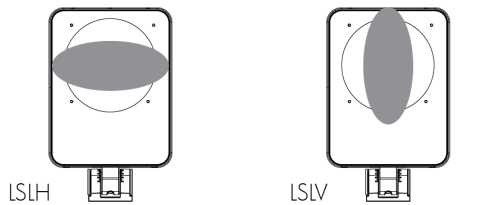


Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS, WW, 2, 2BLS, 3, 3BLS, 4, 4BLS and 5S optics.

See 'Optical Accessories' section for field adjustable spread lens (LSLA).

	Beam angle with LSLH/LSLV
XN	5° x 60°
VN	7° x 60°
NS	13° x 60°
NF	18° x 65°
M	25° x 66°
FL	35° x 70°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.

HL - Honeycomb Louver



Factory installed, not adjustable on site. HL not available for WFL, VWFL, NAS, WW, 2, 2BLS, 3, 3BLS, 4, 4BLS and 5S optics.


The addition of a honeycomb louver will affect beam distribution. Consult factory for application support.

LLF: 0.90*
*LLF may vary slightly by distribution chosen.

Optical Accessories (Factory Installed, Order Separately)


Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.

SN - Snoot

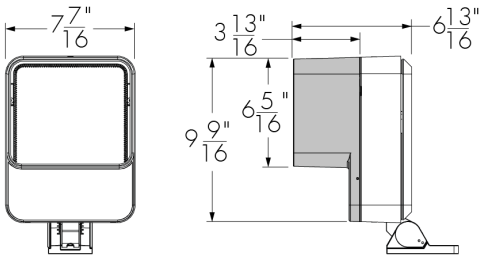

LQMSN-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


VS - Visor

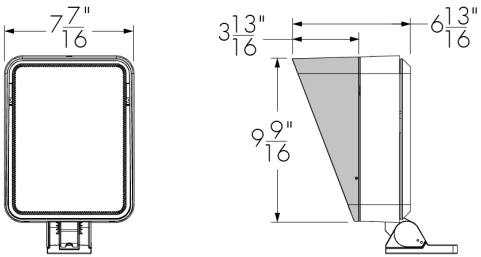

LQMVS-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


The Visor is not recommended for the WW optic.

LSLA - Linear Spread Lens Adjustable

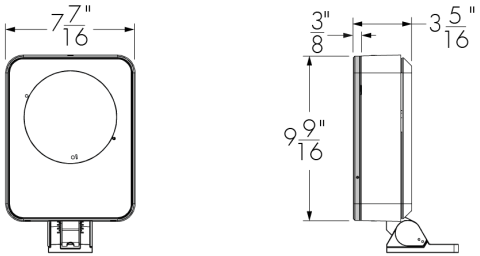

LQMLSLA-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard

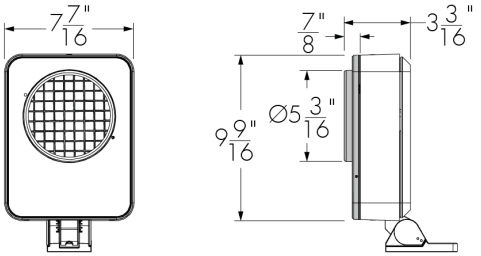

LQMWG-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

+	Snoot	Visor	Wire guard
Linear spread lens adjustable	YES	YES	NO
Wire guard	YES	YES	N/A

Accessory combinations must be ordered together on a single line. Ex: A snoot + wire guard combination order code is LQMSNWG-BK-BK. A maximum of two accessories can be combined per fixture


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147701

Diffuser Lens 2 (2 Notches)




147702

Diffuser Lens 3 (3 Notches)




147703

Diffuser Lens 4 (4 Notches)




147704

Diffuser Lens 5 (5 Notches)



147705

Diffuser Lens 6 (6 Notches)



147706

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)			FL	WFL		
FL (40°)						
WFL (60°)				VWFL		
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LQS**: LQALK-S **LQM**: LQALK-M **LQL**: LQALK-L **LQG**: LQALK-G

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LQS**: LQSLSLA-FINISH-LQALK **LQM**: LQMLSLA-FINISH-LQALK **LQL**: LQLLSLA-FINISH-LQALK **LQG**: LQGSLSLA-FINISH-LQALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.
Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

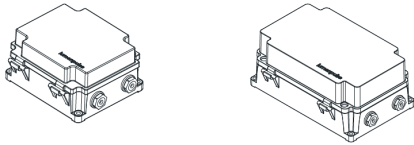


DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.

CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

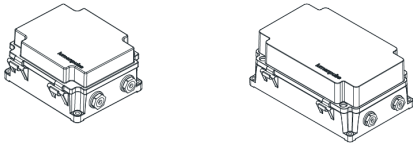

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


LDB - Lumentalk Data Bridge



Lumentalk Data Bridge, 0-10V or DMX output. Consult LDB specification sheet for details.


Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit

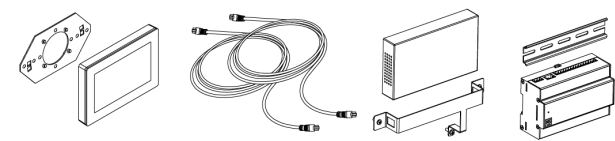

The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

EXPERT - Pharos® Express Control Kit

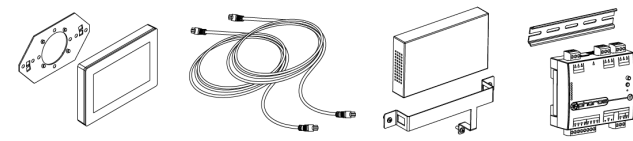

The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



The updated LumenID (LID) is an all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Cable option may vary; please consult factory. For complete details, refer to the LID specification sheet.

EPA Guide

	FIXTURE			MOUNTING OPTIONS*			
	LQM	LQM with Snoot	LQM with Visor	WAM/WAMRJB			
							
				6	12	18	24
EPA Front (sq ft)	0.581	0.732	0.732	N/A	N/A	N/A	N/A
EPA Side (sq ft)	0.258	0.484	0.484	0.134	0.287	0.440	0.593
EPA Front 45° (sq ft)	0.560	0.861	0.861	N/A	N/A	N/A	N/A


*Mounting arm only. Fixture EPA calculation must also be considered.

Typical Wiring Diagrams

Wiring Color Code


UL Color Code	USE
Green	Ground
Black	Line 120-277V AC
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -
Gray	Signal common (DMX/RDM only)

On/Off Control (NO)

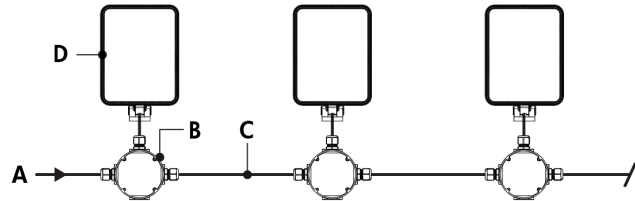

- A - Power input (120-277V, wiring by others)
- B - Junction box (by others)
- C - Power wiring (by others)
- D - Lumenquad Medium


On/Off Control (NO) - Wiring Detail

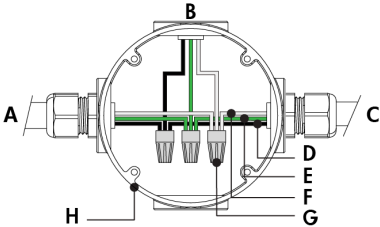

- A - Power input or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Wire-nuts (by others)
- H - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations. 28 watts per fixture.

Lumentalk (LT)

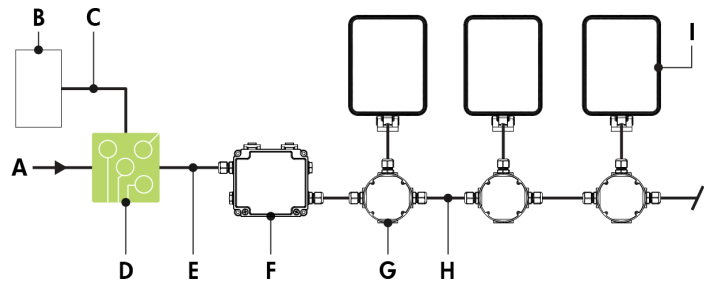

- A - Power input (120-277V AC, wiring by others)
- B - Dimmer/controller (order separately from Lumenpulse, or by others)
- C - Data wiring (by others)
- D - Lumentranslator 2 (LTL2-DIM, -DMX, -TRIAC, -DALI)
- E - Power wiring (by others)
- F - Lumentalk Data Bridge (LDB-DIM or LDB-DMX)
- G - Junction box (by others)
- H - Power and data wiring (by others)
- I - Lumenquad Medium


Lumentalk (LT) - Wiring Detail Using LDB



- A - From Lumentalk Data Bridge (control over power line via Lumentalk system) or from previous fixture
- B - To fixture
- C - 0-10 V + / Data +
- D - 0-10 V - / Data -
- E - To next fixture
- F - Line
- G - Ground
- H - Line/Neutral
- I - Wire-nut (by others)
- J - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk Data Bridge required for Lumentalk system, see LDB installation instructions for details.
- For applications with all fixtures controlled as 1 zone: fixtures and Lumentalk Data Bridge must be specified as DIM. Maximum of 10 fixtures per LDB-DIM, consult factory for applications that require additional capabilities.
- For applications with fixtures controlled individually: fixtures and Lumentalk Data Bridge must be specified as DMX, 2-step commissioning process: 1 - DMX/RDM system using LumenID software and a LID, 2 - Lumentalk system using LumentalkID software and a LID. Maximum of 32 fixtures per LDB-DMX. Consult factory for details.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- Consult factory for DALI Lumentalk applications.
- 1% minimum dimming value.
- 28 watts per fixture.

0-10V Dimming (DIM)

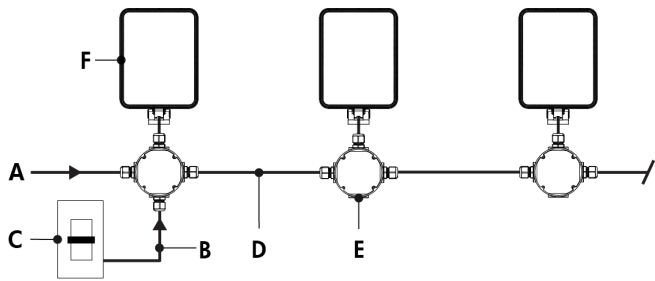

- A - Power input (120-277V, wiring by others)
- B - Data wiring (by others)
- C - Dimmer (by others)
- D - Power and data wiring (by others)
- E - Junction box (by others)
- F - Lumenquad Medium


0-10V Dimming (DIM) - Wiring Detail

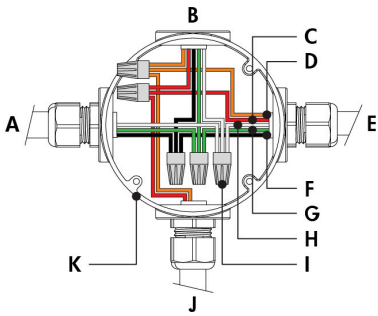

- A - Power input or from previous fixture
- B - To fixture
- C - 0-10 V +
- D - 0-10 V -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Wire-nuts (by others)
- J - From dimmer (by others)
- K - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 0-10V mA ratings: passive dimmer (Current Sink): 3mA per fixture, active dimmer (Current Source): 0.5mA per fixture.
- 1% minimum dimming value. 28 watts per fixture.

DALI Dimming (DALI)

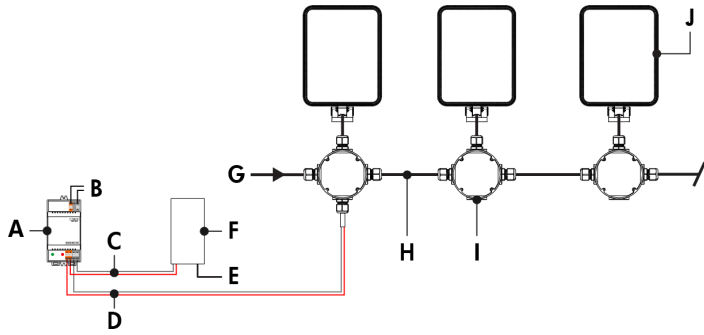

- A** - DALI bus power supply (by others)
- B** - Power input for DALI bus power supply (wiring by others)
- C** - Data output to DALI controller (wiring by others)
- D** - Data output to fixture (wiring by others)
- E** - Power input for DALI controller (if required, wiring by others)
- F** - DALI controller (by others)
- G** - Power input (120-277V AC, wiring by others)
- H** - Power and data wiring (by others)
- I** - Junction box (by others)
- J** - Lumenquad Medium


DALI Dimming (DALI) - Wiring Detail

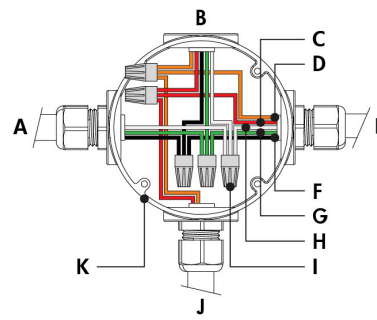

- A** - Power input or from previous fixture
- B** - To fixture
- C** - DA +
- D** - DA -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nuts (by others)
- J** - From DALI controller (by others)
- K** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- 1% minimum dimming value.
- 28 watts per fixture.

Star Layout (DMX/RDM)

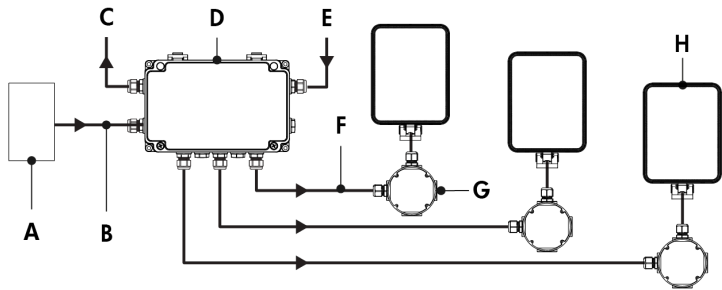

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (120-277V, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenquad Medium

Star Layout (DMX/RDM) - Wiring Detail



- A - From CBX or previous fixture
- B - Lumenterminator*
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Wire-nuts (by others)
- K - Junction box (by others)


Maximum Fixture Count

Maximum number of fixtures per run (Based on 15A maximum, 16AWG cable, fixtures spaced 10ft on center, first fixture 50ft from CBX)				
Configuration/Voltage	120V	208V	240V	277V
LQM	29	32	32	32

- Refer to CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- Each fixture requires 1 DMX address.
- 1% minimum dimming value.
- 28 watts per fixture.


*DMX terminator is required at the end of each run to maintain data integrity. (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.

Daisy Chain Layout (DMX/RDM)

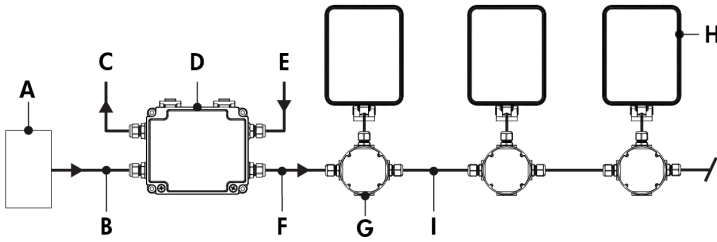

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (120-277V, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenquad Medium
- I - Power and data wiring (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run)

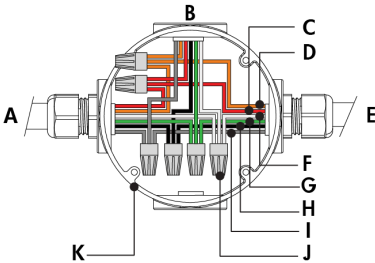


- A - From CBX or previous fixture
- B - To fixture
- C - Data -
- D - Data +
- E - To next fixture
- F - Neutral
- G - Line
- H - Ground
- I - Signal common
- J - Wire-nuts (by others)
- K - Junction box (by others)

Maximum Fixture Count

Maximum number of fixtures per run (Based on 15A maximum, 16AWG cable, fixtures spaced 10ft on center, first fixture 50ft from CBX)				
Configuration/Voltage	120V	208V	240V	277V
LQM	29	32	32	32

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run)



- A - From CBX or previous fixture
- B - Lumenterminator*
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Wire-nuts (by others)
- K - Junction box (by others)

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.

- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 3 ft cable length between fixture and next junction box for daisy chain layout.
- Each fixture requires 1 DMX address.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 1% minimum dimming value.
- 28 watts per fixture.

How to Order

Housing	Voltage ⁽²⁾	Color and Color Temperature ⁽³⁾	Optic	Optical Option ⁽⁸⁾	Mounting Options ⁽¹⁰⁾
LQM Lumenquad Medium ⁽¹⁾	120 120 Volts	22K 2200K	XN Extra Narrow 3° ⁽⁷⁾	LSLH Linear Spread Lens Horizontal Distribution ⁽⁹⁾	SM Surface Mount
	208 208 Volts	27K 2700K	VN Very Narrow 6° ⁽⁷⁾	LSLV Linear Spread Lens Vertical Distribution ⁽⁹⁾	WM Wall Mount Bracket with Decorative Cover
	220 220 Volts	30K 3000K	NS Narrow Spot 10° ⁽⁷⁾	HL Honeycomb Louver ⁽⁹⁾	WMNC Wall Mount Bracket without Decorative Cover
	240 240 Volts	35K 3500K	NF Narrow Flood 20° ⁽⁷⁾		WAM6 Wall Arm Mount 6 in with Decorative Cover
	277 277 Volts	40K 4000K	M Medium 30° ⁽⁷⁾		WAM6NC Wall Arm Mount 6 in without Decorative Cover
		57K 5700K	FL Flood 40° ⁽⁷⁾		WAM12 Wall Arm Mount 12 in with Decorative Cover
		RD Red ^{(4) (5) (6)}	WFL Wide Flood 60° ⁽⁷⁾		WAM12NC Wall Arm Mount 12 in without Decorative Cover
		GR Green ^{(4) (5) (6)}	VWFL Very Wide Flood 90° ⁽⁷⁾		WAM18 Wall Arm Mount 18 in with Decorative Cover
		BL Blue ^{(4) (5) (6)}	NAS Narrow Asymmetric ⁽⁷⁾		WAM18NC Wall Arm Mount 18 in without Decorative Cover
			WW Asymmetric Wallwash ⁽⁷⁾		WAM24 Wall Arm Mount 24 in with Decorative Cover ⁽¹¹⁾
			2 Type II ⁽⁷⁾		WAM24NC Wall Arm Mount 24 in without Decorative Cover ⁽¹¹⁾
			2BLS Type II Backlight Shield ⁽⁷⁾		WAMRJB Recessed JBOX Wall Mount with Decorative Cover
			3 Type III ⁽⁷⁾		WAMRJBNC Recessed JBOX Wall Mount without Decorative Cover
			3BLS Type III Backlight Shield ⁽⁷⁾		WAMRJB6 Recessed JBOX Wall Arm Mount 6 in with Decorative Cover
			4 Type IV ⁽⁷⁾		WAMRJB6NC Recessed JBOX Wall Arm Mount 6 in without Decorative Cover
			4BLS Type IV Backlight Shield ⁽⁷⁾		WAMRJB12 Recessed JBOX Wall Arm Mount 12 in with Decorative Cover
			5S Type VS ⁽⁷⁾		WAMRJB12NC Recessed JBOX Wall Arm Mount 12 in without Decorative Cover
					WAMRJB18 Recessed JBOX Wall Arm Mount 18 in with Decorative Cover
					WAMRJB18NC Recessed JBOX Wall Arm Mount 18 in without Decorative Cover
					WAMRJB24 Recessed JBOX Wall Arm Mount 24 in with Decorative Cover
					WAMRJB24NC Recessed JBOX Wall Arm Mount 24 in without Decorative Cover
					RPM4/1 Round Pole Mount 4 in
					RPM4.5/1 Round Pole Mount 4.5 in
					RPM5/1 Round Pole Mount 5 in
					RPM4/2 Round Pole Mount 4 in for two fixtures
					RPM4.5/2 Round Pole Mount 4.5 in for two fixtures
					RPM5/2 Round Pole Mount 5 in for two fixtures
					PLTU Lumentech Pole Mount ⁽¹²⁾
					TN2 Tenon Adapter for 2 3/8 in O.D. Pole
					TN4 Tenon Adapter for 4 in O.D. Pole

					SK Stake Mount STM Stud mount ⁽¹³⁾
--	--	--	--	--	---

Notes:

1. Consult factory for products that are BAA-approved (Buy American Act).

2. Consult factory for 100 volts.

3. Consult factory for availability of static Royal Blue, 6500K and 90+ CRI.

4. Not available for XN optic.

5. Consult factory for availability with type 2, 2BLS, 3, 3BLS, 4, 4BLS and 5S distributions.

6. Static colors made to order 8-10 weeks.

7. Factory installed, not interchangeable on site.

8. Optical options are factory installed and cannot be changed in the field.
9. Not available for WFL, VWFL, NAS, WW, 2, 2BLS, 3, 3BLS, 4, 4BLS and 5S optics.

10. All mounting options (except for SM mounting) are interchangeable. Consult factory for details.

11. A cable length of 10 ft or greater must be specified.

12. Available for Lumentech poles with a square or round profile. A PLTU - Universal Yoke accessory must be ordered with the Lumentech pole for the Lumentech to fit with the PLTU mounting option. Refer to Lumentech specification sheet and installation instructions for more details.

13. For thru-wall mounting.

How to Order

Finish	Control ⁽¹⁷⁾ ⁽¹⁸⁾	Option	Certification	Cable Length ⁽²⁰⁾ ⁽²⁴⁾ ⁽²⁶⁾
BK Black Sandtex®	NO On/Off Control	CRC Corrosion-Resistant Coating ⁽²¹⁾ ⁽²²⁾	UL UL Compliant	3FT 3 ft ⁽²⁰⁾ ⁽²⁵⁾
BRZ Bronze Sandtex®	DIM 0-10V Dimming		CE CE Compliant ⁽²³⁾	10FT 10 ft
SI Silver Sandtex®	DALI DALI Dimming			20FT 20 ft
WH Smooth White	DMX/RDM DMX/RDM Enabled ⁽¹⁹⁾ ⁽²⁰⁾			30FT 30 ft
BKTX Textured Black				50FT 50 ft
BRZTX Textured Bronze Non-Metallic				70FT 70 ft
GRATX Textured Medium Gray				100FT 100 ft
GRNTX Textured Green				
WHTX Textured White				
CC Custom Color & Finish ⁽¹⁴⁾ ⁽¹⁵⁾ ⁽¹⁶⁾				

Notes:

- 14.** Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.

15. Longer lead times can be expected for custom RAL color finishes.

16. Setup charges apply for RAL colors. Consult factory for details.

17. Lumentalk system is enabled with LDB accessory. DIM or DMX/RDM must be specified in the order code. See the typical wiring diagrams in the specification sheet for details.

18. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

19. A control box (CBX) and LumenID (LID) must be specified.
- 20.** Maximum of 3 ft cable length for daisy chain DMX applications with CBX-DS.

21. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

22. Setup charges apply. Consult factory for details.

23. Consult European specification sheet and installation instructions for CE wiring information.

24. Not applicable to WMRJB, WMRJBNC and WAMRJB 6 in to 24 in mounting options (with or without decorative cover). Cable lengths for these mounting options are determined by the length of the mounting bracket.

25. Not available with WAM24 or WAM24NC mounting options.

26. UL fixtures specified with a Smooth white finish and a SM, WM, WMNC, or WAM 6 in to 24 in mounting option (with or without decorative cover) are provided with a white cable. A black cable is provided for all other fixture configurations.