


LN-2004
空壓電熱上領記號機
MARK DRILL MACHINE



LN-100RS
圓刀裁剪機-八角形圓刀片
ROUND CUTTER

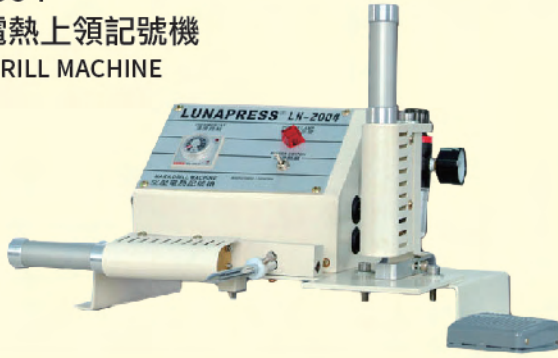

LC-90
圓刀裁剪機-六角形圓刀片
3-1/2" ROUND KNIFE CUTTER

LN-100K
圓刀迷你裁剪機
MINI CUTTER



LU-770PLHB
高速軌道式切斷機
COMPLETE WITH END
CLOTH HOLDING
DEVICE



SM-201L
裁剪記號機
CLOTH MARKING DRILL



LU-933
新型變速自動布條裁切機
NEW AUTO SPEED CHANGE
PIPING STRIP CUTTING
MACHINE




LN-300B
直線式萬能折燙機

ALMIGHTY CREASING AND
MINI-FUSING MACHINE



LN-215A
空壓式袖口定型機

CUFF PRESSING
MACHINE

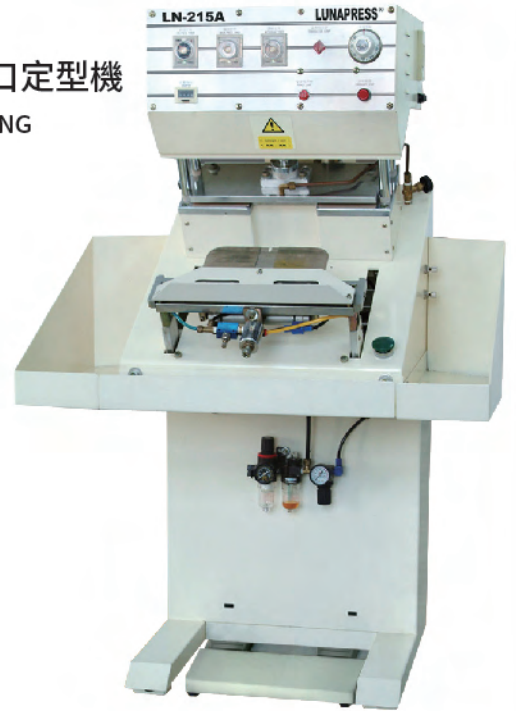

LN-600MAH
氣壓全自動連續式粘襯機


AIR AUTOMATIC LINEAR
FUSING PRESS

Also available for
LN-700MAH
LN-700MAL
LN-1000MAL



LN-323AX
空壓式切,翻,燙領機

COLLAR PRESSING MACHINE

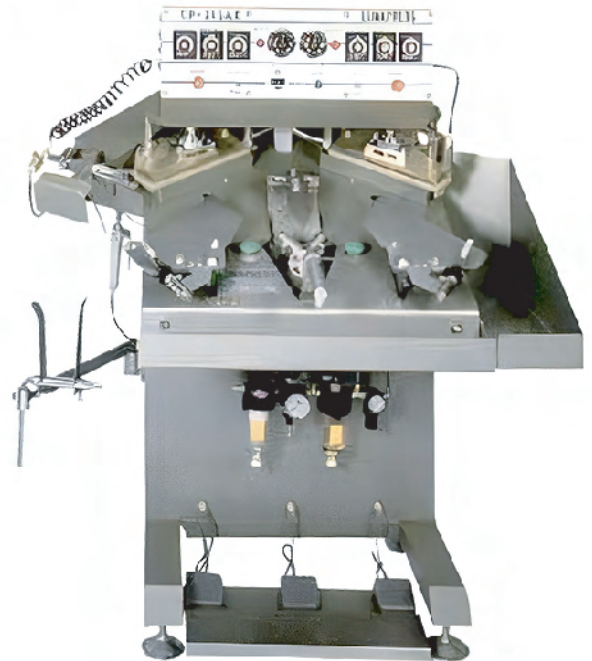

LN-600XL
氣壓全自動連續式粘襯機

STRAIGHT LINEAR FUSING
PRESS

Also available for
LN-1000XL
LN-1200XL
LN-1400XL





Also available for
LN-323S, LN-323T
"Three - in one" Collar Pressing Machine



LED MODULE

LED MARKER


IE-5201LGO / IE-6201LGO

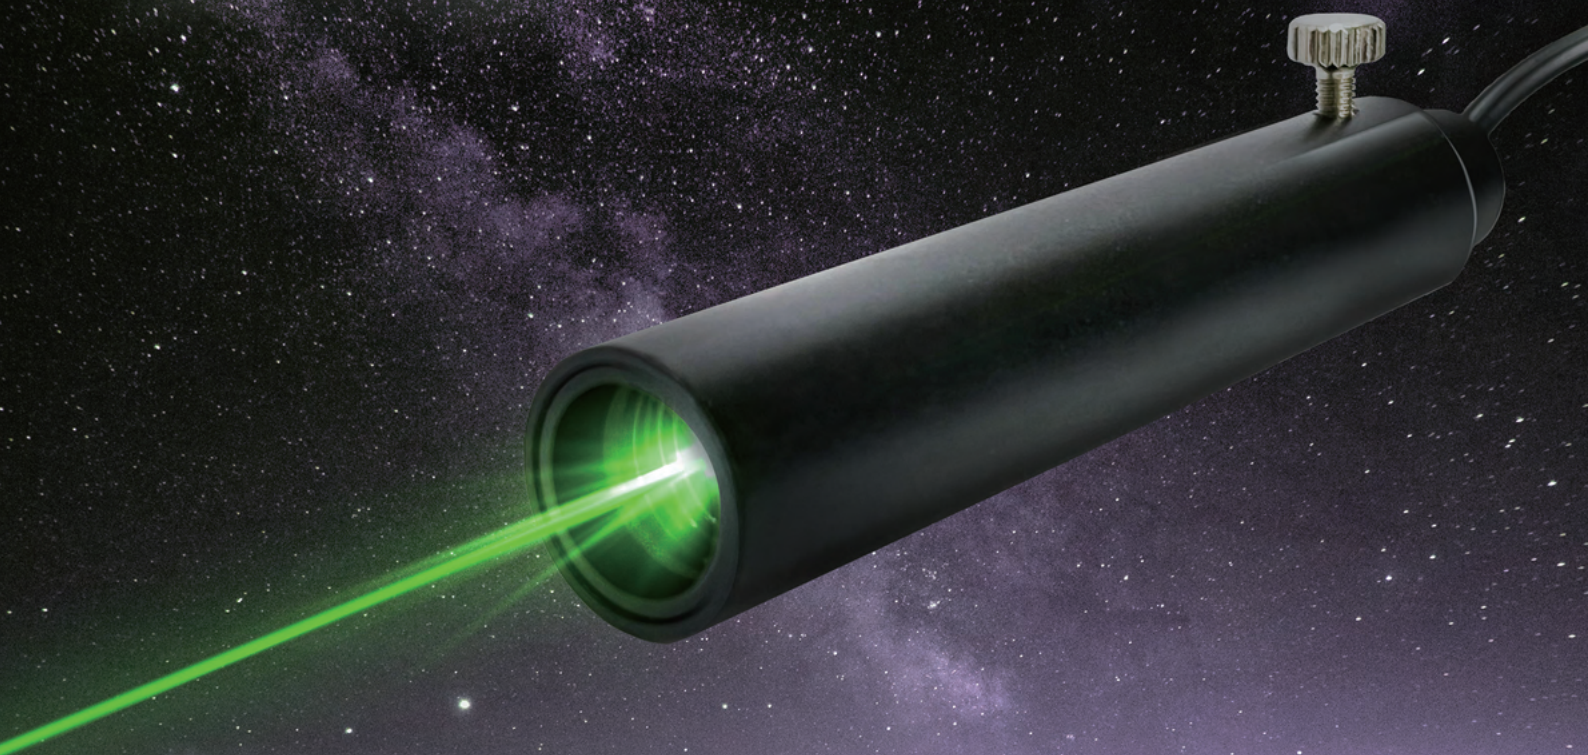

SPECIFICATION

MODEL	RED			GREEN		
	IE-6201LGO	IE-6201LGP	IE-6201LGQ	IE-5201LGO	IE_5201LGP	IE-5201LGQ
Beam Pattern						
Wavelength (2d)	625 +5nm			525 + 5nm		
Projection Distance	110mm - 500mm					
Source of Light	LED					
Operating Current	30mA					
Lifetime	100,000 hours (@RT)					
Operating Voltage	DC - 5V ± 5%					
Operating Temperature	-30°C ~ +80°C					
Focusing Mode	Adjustable Mode					
Weight	40g					

• IE-6201LGO

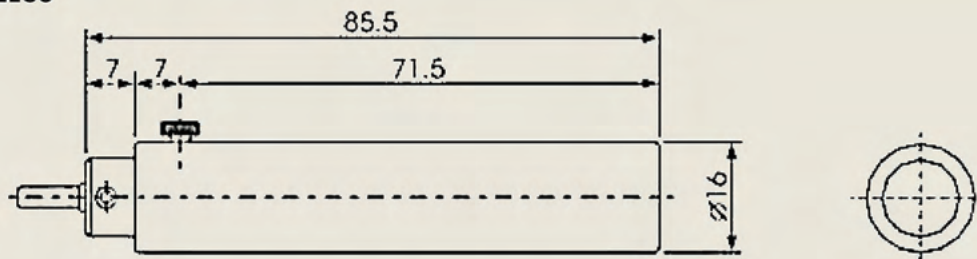

Remarks

Line Width can change depending on the environment.
For AC power, use the adapter for AC power only available at LUNA


Input Voltage: AC 100V ~ 250V, 47 ~ 63Hz
Output Voltage: DC 5V, 2.0A

WARNING

1. Please use the voltage within the designated range. Avoid turning ON and OFF the Product during a short.
2. Period of time since it can cause damage to the Product. This Product is not water-resistant. Be careful not to expose the Product to moisture.
3. LEDs are very sensitive to the change in the temperature. Usage under low temperature is recommended for longer use.
4. Noise filter must be used when the motor solenoid is directly linked to the power.
5. Authorization of noise or voltage surge can destroy the laser diode and lead to the lighting failure. This Product is a very precise optical instrument. Be careful not to drop it. Severe shock to the Product can cause malfunction.
6. Do not disassemble, repair or rebuild the Product at your own discretion. After sales services are not available in the case of arbitrary disassembly, repair or rebuilding.


For improvement of the Product the design and specifications are subject to change without prior notice.



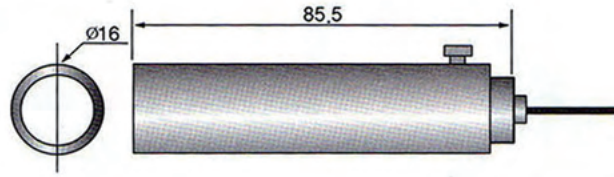


FEATURE

- Compact Structure
- Green, Red, White LED Lamp
- Focusing Available
- Working Distance 112 - 500mm
- Black Anodized Aluminum Housing

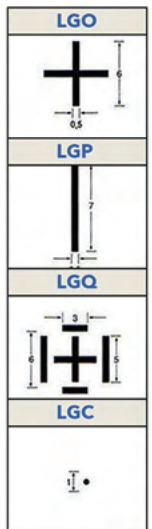

SPECIFICATION			
Model	5201LGO/LGP/LGQ/LGC	6201LGO/LGP/LGO/LGC	LWGO/LGP/LGO/LGC
Color	Green	Red	White
Projection Distance mm	112 ~ 500		
Source of Light	LED Lamp		
Operating Voltage(VDC)	5		
Operating Current(mA)	30		
Operating Temperature(°C)	-30 ~ +60		
Focusing Mode	Adjustable		
Life time	30,000 hr		

Working Distance vs Line Length (Applied to Line and Cross Laser)

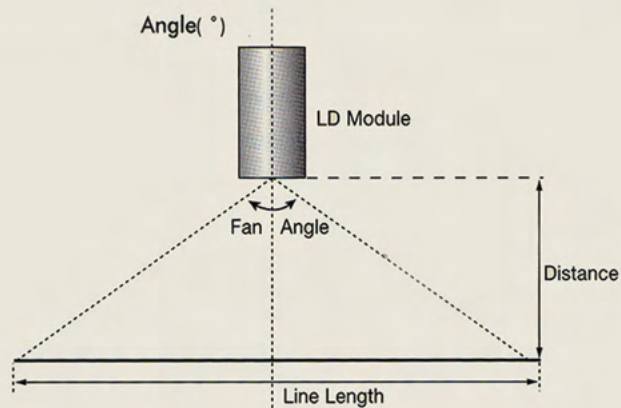


Angle(°)	Distance		0.1m	0.3m	0.5m	1m	1.5m	2m	3m
	Symbol								
5			0.01	0.03	0.04	0.09	0.13	0.17	0.26
15	1D		0.03	0.08	0.13	0.26	0.39	0.53	0.79
30	3D		0.05	0.16	0.27	0.54	0.8	1.1	1.6
45	4D		0.08	0.25	0.41	0.83	1.24	1.7	2.5
60	6D		0.12	0.35	0.58	1.1	1.7	2.3	3.5
90	9D		0.2	0.6	1	2	3	4	6
120	12D		0.35	1	1.73	3.45	5.2	6.9	10.4





Industrial Laser Liner / Module



工業用鐳射標線/定位元件



LA-9405-M



LA-9405-MF




LA-9305-MN




IE-4000

• Universal Type
(Magnetic or/and Screw Type)


品名 ModelNo.	LA-9405-M	LA-9405-MF	LA-9305-MN
型式 Pattern	Small Cross 小十字型	Cross/Focus 十字型 / 可調焦距	Big Cross 大十字型
波長 Wavelength (nm)	645	645	635
輸出功率 Output Power (mw)	<5	<5	<5
輸入電壓 Operatmg Voltage (DC)	DC 5V	DC 5V	DC 5V
操作電流 Operating Current (mA)	30-50	30-50	40
單位尺寸 Dimension (mm)	ø16.5 X 63.5L	ø16.5 X 76.5L	ø14 X 61L
有效運用 (公尺) Visible Distance (meter)	0.5M	0.5M	2M
操作溫度 (°C) Operating Temperature	-10°C ~ +50°C	-10°C ~ +50°C	-10°C ~ +50°C



Sewing Machine
縫紉機械




Tyre Bonding
輪胎定位




Mechanical Line Cutting
機械鉸金標線




Line-Maker
切割機標線




Sewing & Dyeing Location
紡織印刷/印染定位




Golf Assembly
高爾夫加工定位

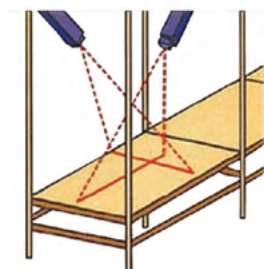


S.M.T Machine
SMT 定位/定格



Screen Printing
網版印刷定位



Stone Cutting
石材切割標線



Lumber
鋸木加工標線





High Reliability Industrial Laser Liner Projector



專業級工業用鐳射標線器

我們依據不同的產業特性,設計了"點式"、"線式"及"十字"等多款鐳射標線定位器;
簡單的定位輔助工具卻可廣泛的應用在各類工業加工方面。

使用鐳射標線定位器可使操作者加倍提升工作效率及正確性,大大提高了產品的附加價值與產業的升級。

We carry a series of laser light which can be projected in different forms:dot, line, and cross '+'.
It's simple visual tool but apply to multi-task. It can increase operator's accuracy and efficiency
as well as improve productivity.



LA-9405-L

LA-9410-L

LA-9305-L

LA-9310-L

LA-9315-L

品名ModelNo.	LA-9405-L	LA-9410-L	LA-9305-L	LA-9310-L	LA-9315-L
型式Pattern	Liner 線型	Liner 線型	Liner 線型	Liner 線型	Liner 線型
波長Wavelength(nm)	645	630	635	635	630
輸出功率Output Power(mw)	<5	<5	<5	<10	<10
輸入電壓Operatmg Voltage(DC)	DC 5V	DC 5V	DC 5V	DC 5V	DC 5V
操作電流Operating Current(mA)	30-70	>50	40-80	50-90	>50
單位尺寸Dimension(mm)	ø15.3 X 67.0L	ø22.0 X 83.0L	ø17.5 X 68.5L	ø23.0 X 90.8L	ø22.0 X 83.0L
有效運用(公尺)Visible Distance(meter)	2M	3M	4M	6M	8M
操作溫度(°C)Operating Temperature	-10°C ~ +50°C	-10°C ~ +50°C	-10°C ~ +50°C	-10°C ~ +50°C	-10°C ~ +50°C

專業級工業設計:

耐震、防塵、省電,長時間工作操作,專利線性準直機構設計,3層式玻璃鏡片(APC+R)

3-Element Glass, High Reliability, Long Time work, PATENT Liner Design, Dust-resistant industrial design, (APC+R) Operating

以上鐳射元件可裝置於IE-4000支架,並可另附加接電源穩壓器100-240V, 1A 50-60 Hz DC 5V自動切換

Laser Module can be installed with IE-4000, adaptor auto selection 100-240 AC 50-60 HZ 5V.DC. 1A is recommended.



立欣(寧波)針車有限公司
LUNA (NINGBO) SEWING MACHINE CO., LTD.
TEL: 86-574-8845-3458 8845-3468
FAX: 86-574-8845-3478

立欣針車實業有限公司
LUNA INDUSTRIAL CO., LTD.
TEL: 886-2-8966-5577
FAX: 886-2-8966-5443
E-Mail: info@lunasew.com
luna0510@ms13.hinet.net



<http://www.lunasew.com>

SEWING MACHINE LED LIGHT

MADE IN
TAIWAN

SAVE ENERGY
80%

DURABLE




LED-98KN


LED-27KN

1. 限用LED-4W DC12V燈管，省電百分之八十，保護操作者的視力，提高生產效能
USE LED-4W DC12V lamp only. It can save 80% of power, protects the operator's eyesight and improves production efficiency.
2. 180度可調以獲得最佳照明
180° adjustable for optimal illumination.
3. 安裝簡易
Easy to install within a minutes.
4. 變壓器在外側
Transformer on the outside.
5. 電壓：100V~240V，50HZ/60HZ
Voltage/Cycle：100V~240V，50HZ/60HZ

LED-98KN

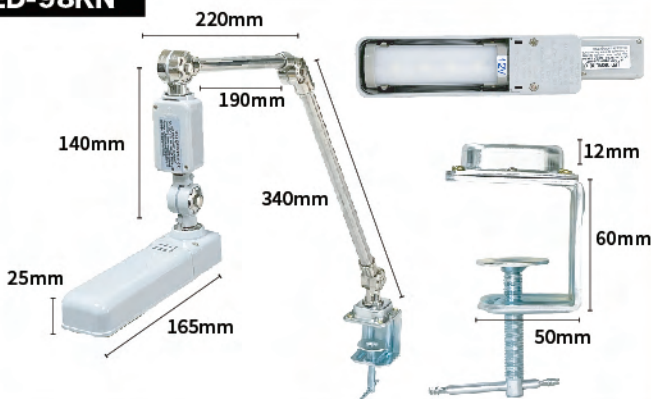

LED-27KN

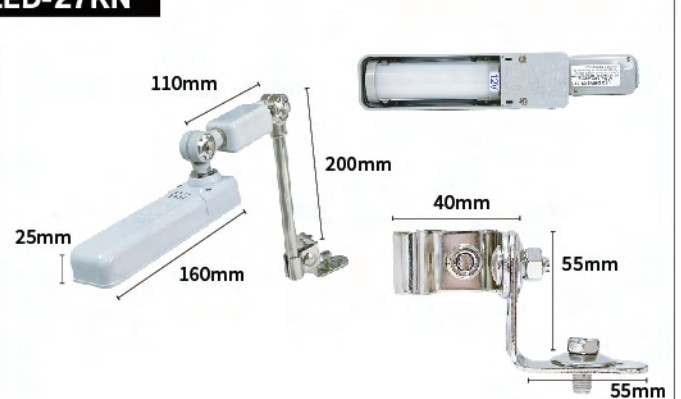

立欣(寧波)針車有限公司
LUNA (NINGBO) SEWING MACHINE CO., LTD.
TEL: 86-574-8845-3458 8845-3468
FAX: 86-574-8845-3478

立欣針車實業有限公司
LUNA INDUSTRIAL CO., LTD.
TEL: 886-2-8966-5577
FAX: 886-2-8966-5443
E-Mail: info@lunasew.com
luna0510@ms13.hinet.net



<http://www.lunasew.com>

SEWING MACHINE LED LIGHT

**MADE IN
TAIWAN**

**SAVE ENERGY
80%**



DURABLE

LU-15BLED



ITEM	LU-15BLED
INPUT	AC 100V-120V AC 200-240V
OUTPUT POWER	DC 12V 1W

LU-15ALED

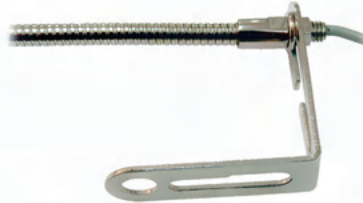

ITEM	LU-15ALED
INPUT	AC 100V-120V AC 200-240V
OUTPUT POWER	DC 12V 1W

LU-12MLED



ITEM	LU-12MLED
INPUT	AC 100V-240V
OUTPUT POWER	DC 12V 1W

LU-12SLED



ITEM	LU-12SLED
INPUT	AC 100V-240V
POWER	1W

LU-12VLED



ITEM	LU-12VLED
INPUT	AC 100V-240V
POWER	1W



HIGH POWER LED LIGHT


SAVE ENERGY

LU-LED-01MDW/ LU-LED-01MDP



INPUT POWER	AC100-240V 50-60Hz
OUTPUT POWER	DC6.5V
LED	2W
LINK	MOTOR SWITCH

LU-LED-02(4,6)

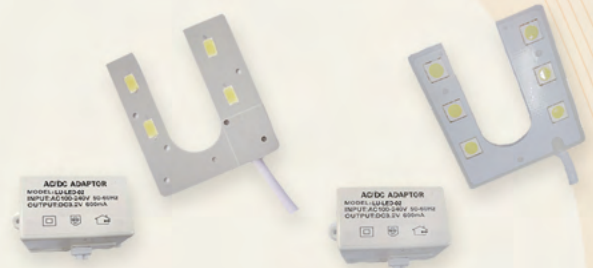

INPUT POWER	AC100-240V 50-60Hz
OUTPUT POWER	DC7V
LED	1.3W
LINK	MOTOR SWITCH

LU-LED-05AD



INPUT POWER	AC100-240V 50-60Hz
OUTPUT POWER	DC3.5V
LED	0.25W
LINK	MOTOR SWITCH

LU-LED-06MD



INPUT POWER	AC100-240V 50-60Hz
OUTPUT POWER	DC3.5V
LED	1W
LINK	MOTOR SWITCH



HIGH POWER LED LIGHT

SAVE ENERGY

LU-LED-09D/DS



INPUT POWER	AC100-240V 50-60Hz
OUTPUT POWER	DC3.5V
LED	1W
LINK	MOTOR SWITCH

LU-LED-08D



INPUT POWER	AC100-240V 50-60Hz
OUTPUT POWER	DC6.5V
LED	0.65W
LINK	MOTOR SWITCH

LU-LED-07D



INPUT POWER	AC100-240V 50-60Hz
OUTPUT POWER	DC3.5V
LED	1W
LINK	MOTOR SWITCH





Singer 勝家

Singer 勝家

Pegasus 飛馬


Reece 利是 Eastman 伊士文

Mitsubishi 三菱 Durhopp 杜克普

Newtong 牛郎 Kingtex 寶獅

Brother 兄弟



Yamato 大和

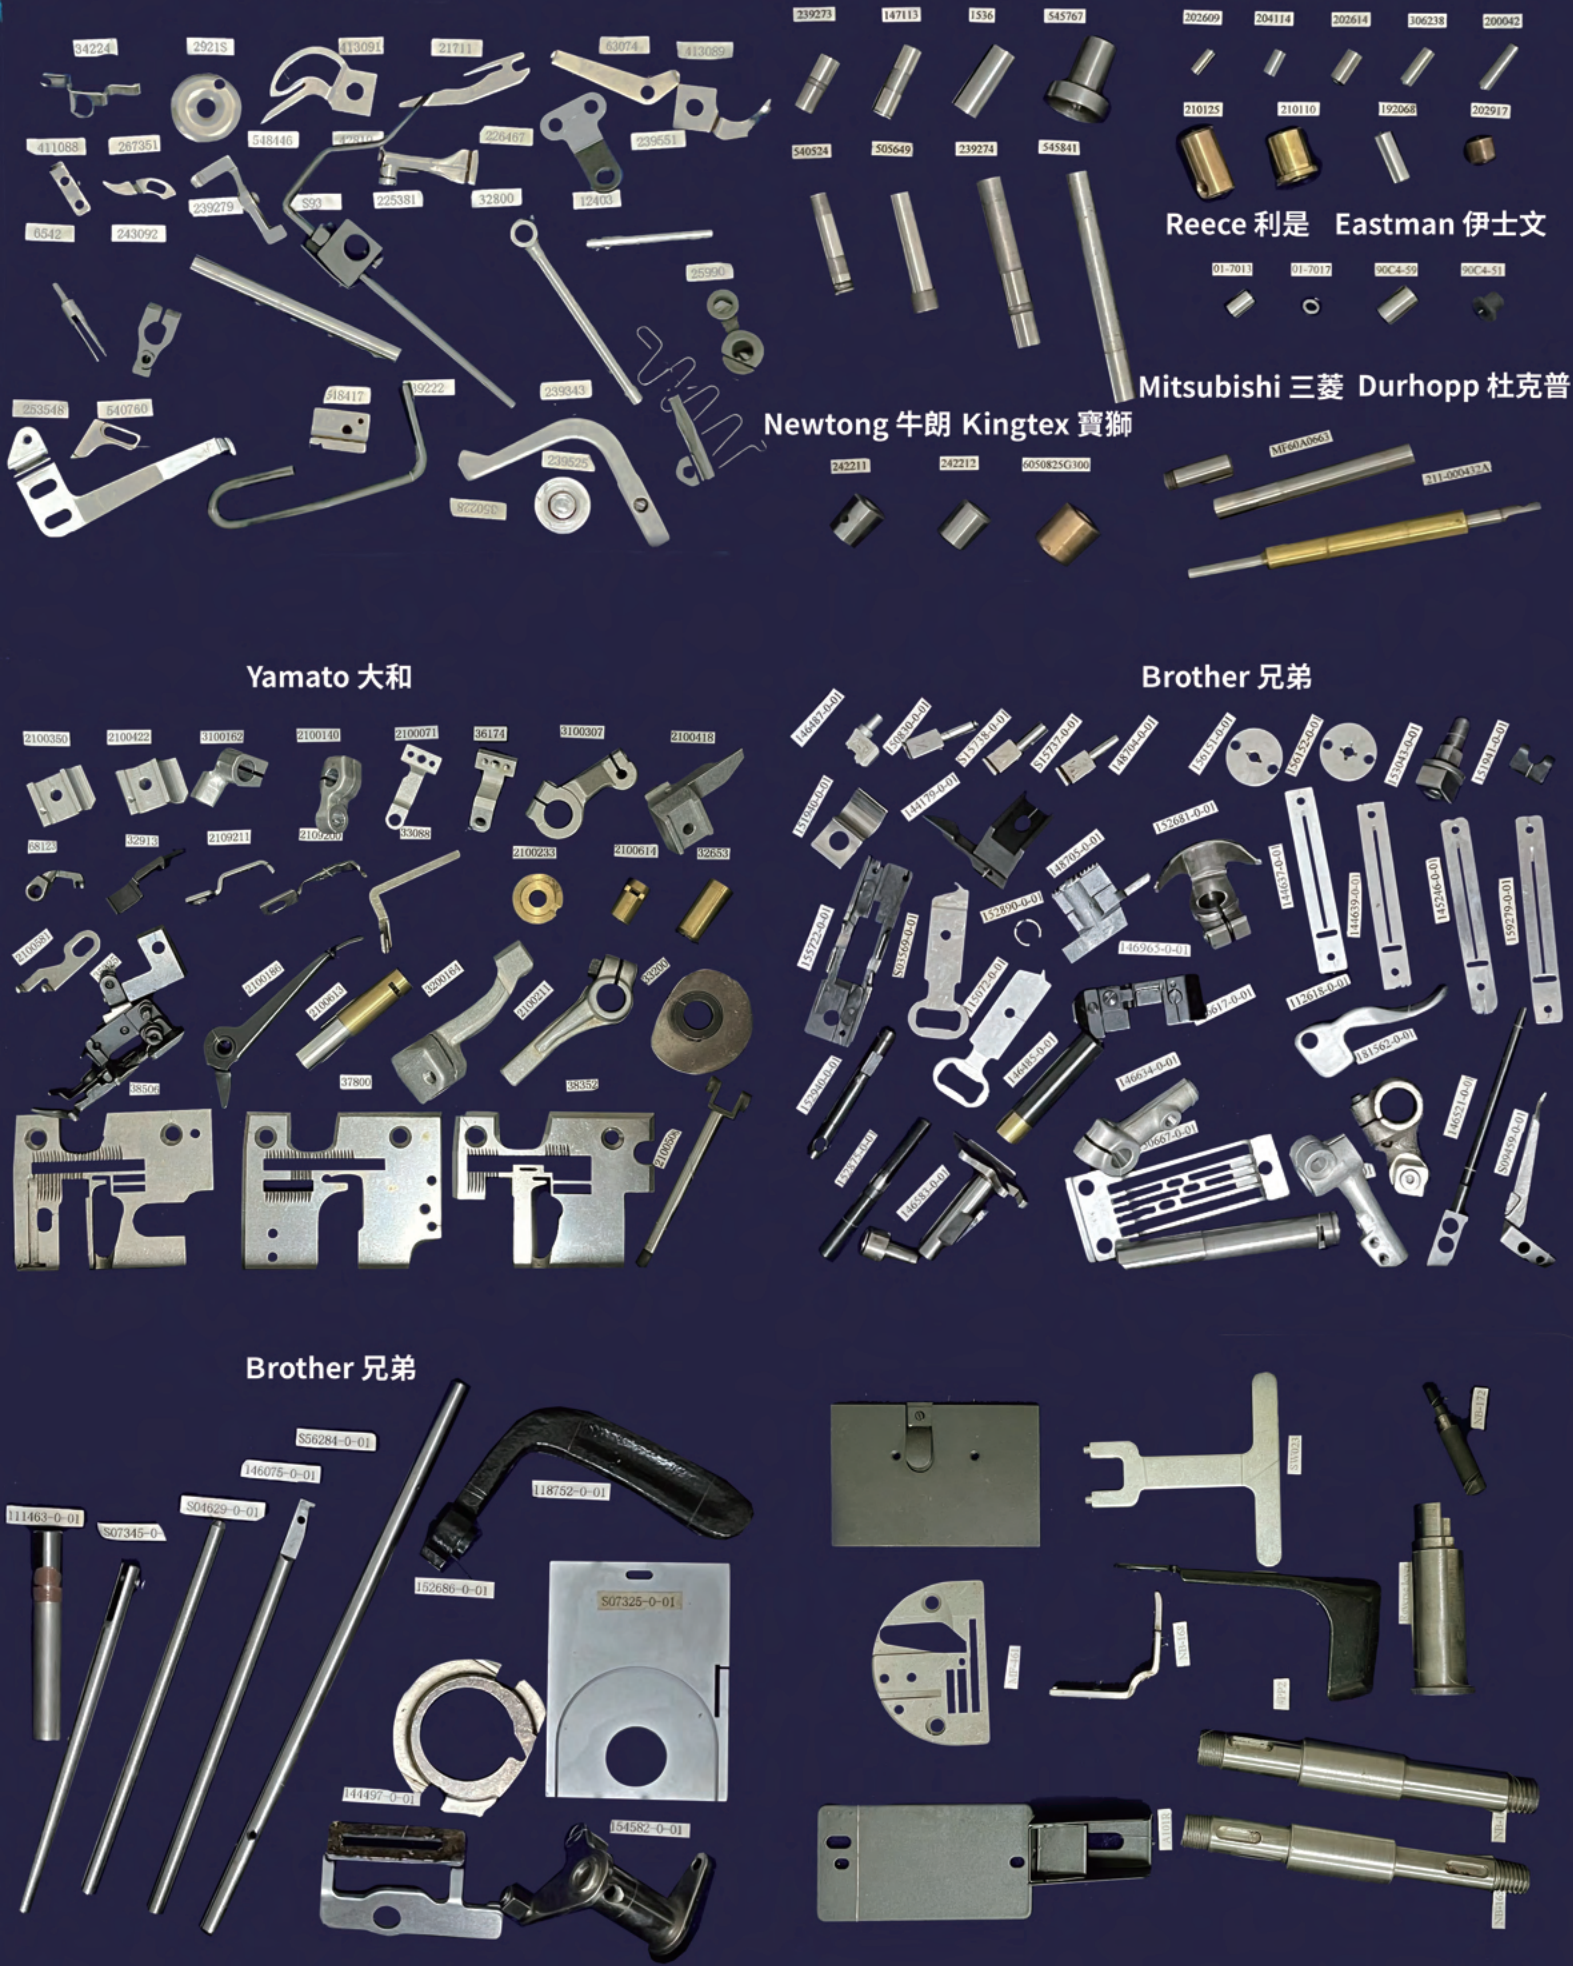



Kansai 森本

Kansai

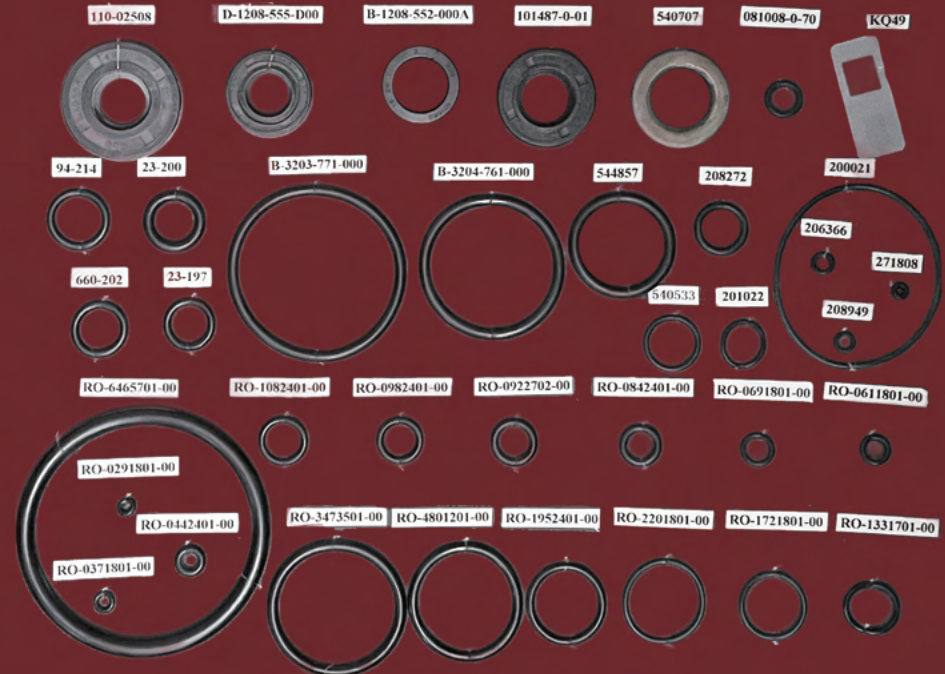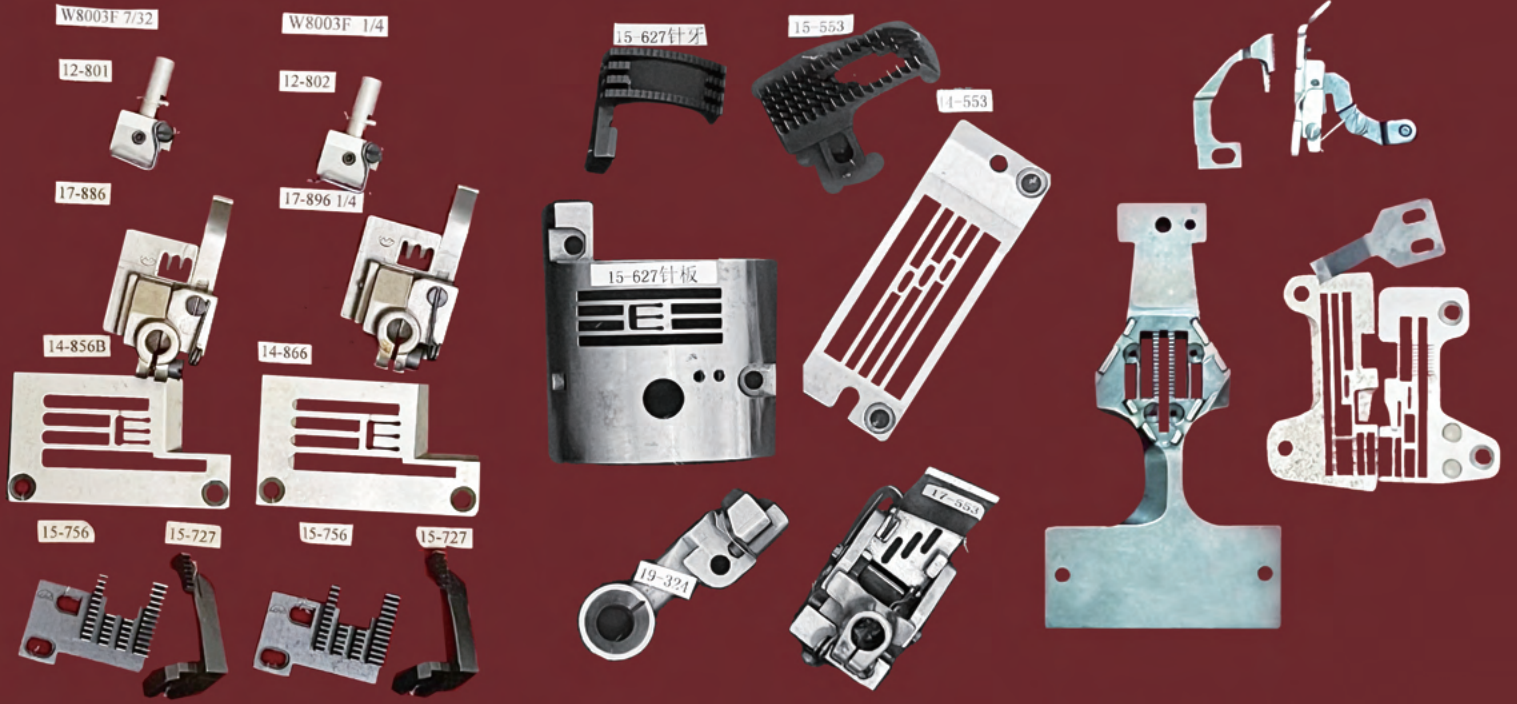



CANARY



Chizimi




MIRO



WB1



218TM



BR1




2518P-C



WB8



BR2



9033P



172222P



55623P



2518



2518P



820921-096



110R



SN-DR1



LUS-37886-5



LUS-6003A



111R



SN-624



45N 1/16




LUS-37828-8B



112R



TWE6




TC110



TC200



115R

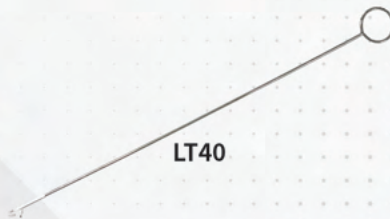

LT40



✧ 縫紉剪
Sewing & Tailor scissors



LUS-110 9.5"



LUS-110 8.5"



LUS-B-952-5



E-5165



LUS-37976-8.5



LUS-S928A 10"

✧ RC模型剪刀
RC hobby modeling scissors



LUS-37855S-5.5

✧ 紗布剪刀
Medical nurse bandage scissors



E-5135

✧ 繡花剪
Embroidery scissors



LUS-37877-7

✧ 廚房剪刀
Kitchen scissors



LUS-37878C-8

✧ 日本庄三郎 裁縫剪刀 (黑盒)



TOKYO SHOZABURO
TOBASAMI AJK240



G20E



G20E-S



SMG



MG1



MG25873



G1



G4



G7



G8



SCI-P



SCI6



PR-1506



C15



Woollic Lock Lame ウォリックラメ

#日本Fuhix 富士克QQ線(共15色)

Kind 品番/品种	Composition 構成/构成	Total deci tex 織度/纤度	Strength 強力/強力
High elasticity 高伸縮/高彈力	240dtex (Film フィルム 膠帶38dtex)	270dtex	8.9N (910gf)
Elongation 伸度/抽長度	Weight 糸量/線量	Number of Colors 常備色數/常色數	
38%	25g	15	



Lamé Stylo

規格 Size	成份 Composition
210 dtex 分特克斯	79% Polyester 聚酯纖維(滌倫) 21% Nylon 尼龍纖維
注意事項 Notice	
<ol style="list-style-type: none"> 1. 使用此線時請避免接觸到強酸或強鹼性的環境，不然可能會造成此金屬線變色或失去光澤。 2. 在收藏此線，請避免接觸到酸性或鹼性；物質或任何防蟲藥劑，最好放在塑料袋(聚乙烯袋/PE)中保持乾燥。 3. 避免存放在潮濕或高溫中。 4. 在使用前請確認色號，因為金屬線的顏色會因為不同的染色批次而有些微的色差。 	



BABY LOCK 中國總代理

立欣(寧波)針車有限公司
LUNA (NINGBO) SEWING MACHINE CO., LTD.

TEL: 86-574-8845-3458 8845-3468
FAX: 86-574-8845-3478

BABY LOCK 台灣總代理

立欣針車實業有限公司
LUNA INDUSTRIAL CO., LTD.

TEL: 886-2-8966-5577
FAX: 886-2-8966-5443
E-Mail: info@lunasew.com
luna0510@ms13.hinet.net



<http://www.lunasew.com>

✦ **259431**

繞線器
Bobbin winder



✦ **S290**

線架
Tape rack



✦ **FPL-2**

線架
2-spool stand



✦ **TR105**

多功能送料架
Tape Reel & Rack



✦ **FPL-6**

線架
6-spool stand



✦ **151257**

線架
12-spool stand

