


ifi

GO pod Air

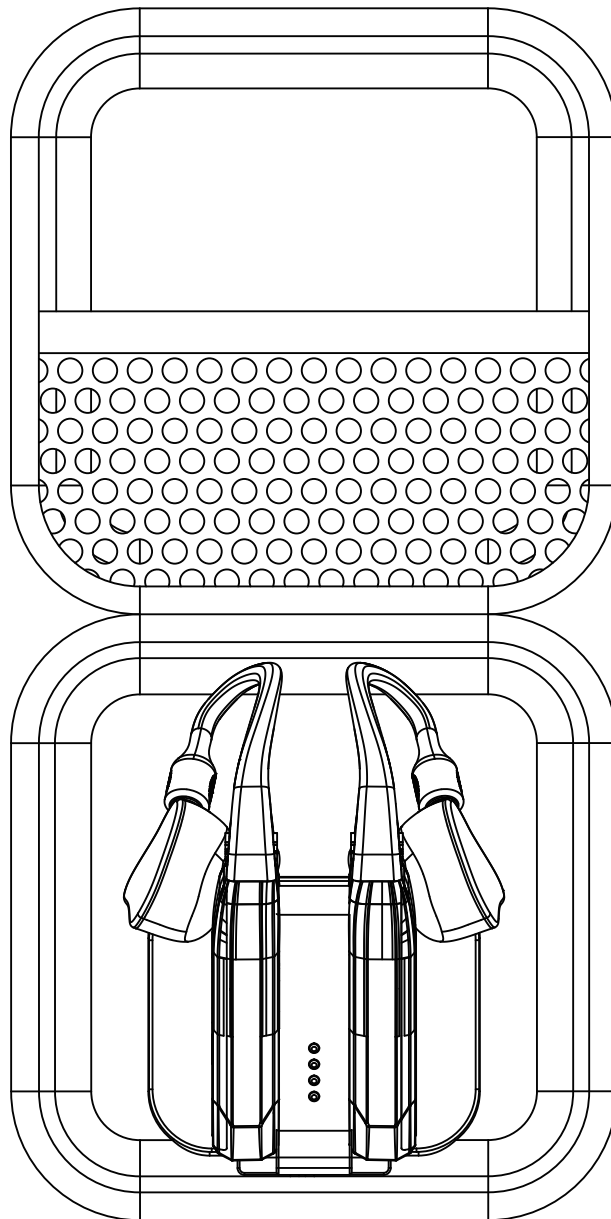

User Manual

Ver1.0


Thank you for purchasing this GO series pod. The **GO pod Air** is an Wearable HD Bluetooth DAC/headphone amp.

All the greatness of our GO pod series – now lighter than ever.

The **GO pod Air** liberates your wired IEMs from cables, delivering true Hi-Fi performance over Bluetooth with a dedicated DAC, amp, and clock. Each pod self-adjusts power output to match your IEMs, ensuring every note hits just right. Designed for life on the move, its ultra-light travel case makes it effortless to take award-winning sound wherever you go.

FEATURES

- Transforms IEMs into a high fidelity True Wireless Stereo system
- Hi-Res 24/96kHz Bluetooth with support for LDAC, LHDC, and aptX Adaptive codecs
- Hi-Fi inspired architecture with dedicated Bluetooth, DAC and amp stages in each pod
- Cirrus Logic MasterHIFI DACs deliver dynamic sound with minimal battery drain
- Fully balanced amplification for ultra-low distortion and a silent background with sensitive IEMs
- Customisable sound with user-selectable digital filters and auto impedance matching
- Interchangeable ear loop connection system for broad IEM compatibility
- Lightweight, ergonomic design for all-day comfort

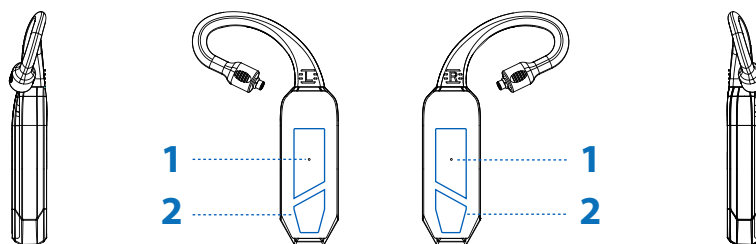

1. GO pod Air status indicator


LED	Status
Charging:	Steady Red
Fully charged:	Light off
Awaiting connection:	Flashing Blue
Ready to pair:	Alternately flash Red and Blue
Successfully paired:	Light off
Factory Reset:	Steady Blue $\geq 3s$. Then alternately flashes red and green (Operated via the Nexis app, only effective when using two earphones. Not effective when using a single earphone.)

2. Touch control area

- Play/Pause/Answer the call (Single tap)
- Reject/hang up (Double tap)
- Skip forward (Double tap)
- Skip back (Triple tap)
- On/Off Touch control area (Four tap)¹
- Volume Up (Hold right): Only works when using both earpieces. Doesn't work with one earpiece.
- Volume Down (Hold Left): Only works when using both earpieces. Doesn't work with one earpiece.
- Wake up voice assistant (Single tap then hold)
- Bluetooth Pairing (Hold left and right together for $\geq 2s$)
- Power Reset (Hold left or right for $\geq 12s$, release when steady blue light is on)²

Tip: 1. This feature was added via a Bluetooth firmware update to prevent accidental touching of the control area.


2. The reboot function can be used when the GO pod is abnormal or dead.

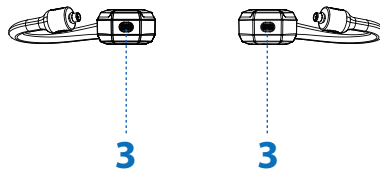

3. Microphone


Built-in mic for hands-free calls when paired with your smartphone.

Tip: To wake up your phone's voice assistant, Single tap then hold left or right for $\geq 2s$ the Touch control area (2).

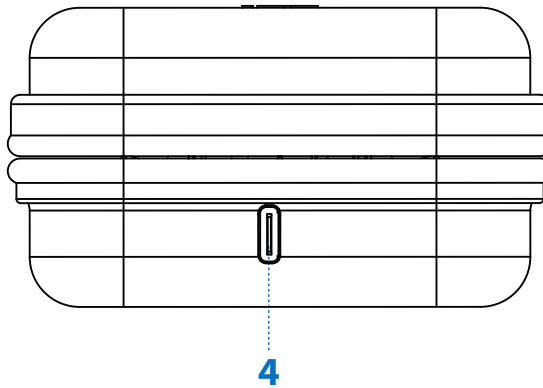

4. 5V/0.7A USB-C battery charge input

For charging only. 5V/0.7A and above USB-C charger.

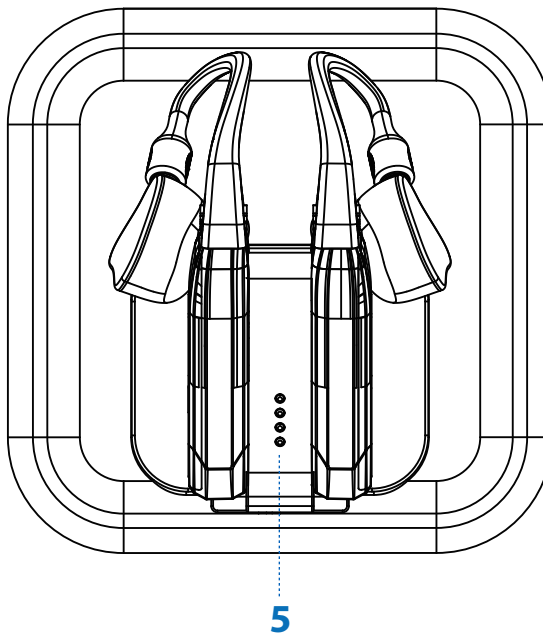

5. Charging box LED for Battery Status

LED	Status
4/4	> 75%
3/4	> 50%
2/4	> 25%
1/4	$\leq 25\%$

**Battery LED will flash when it is charging and will go out when it is fully charged..*

Bluetooth Pairing

When removed from the charging case, GO pod Air LED blinks blue as it automatically searches for a previously paired device. If a stored device is not found, it then automatically enters pairing mode with LED blinking blue and red.

To enter pairing mode manually, Press the left and right touch area together for ≥ 2 s until LED flashes red / blue.

The GO pod Air is able to store up to 8 paired Bluetooth devices. Manual reconnection may still be necessary.

Connecting to Bluetooth device

When you remove the GO pod Max from the charging case, they switch on and connect to each other automatically; both pods flash blue during interconnection, and once connected, But then will flash Red and Blue if not paired to a audio device

GO pod Air Auto-connecting

The GO pod Air switch on and connect to each other automatically when taken out of the charging case. And the GO pod Air will flash blue lights to indicate that the GO pod Air are automatically interconnection to each other. Once interconnection successfully, the GO pod Air L +R will alternately flash the red light and blue light.

Single-GO pod Air Mode

Removing the right or left GO pod Air from the charging case, it will automatically turn on, and select "GO pod Air" (Left GO pod Air) or "GO pod Air" (Right GO pod Air) in the Bluetooth list to connect GO pod Air.

If the GO pod Air has not successfully connected to Bluetooth for more than 5 minutes, they will automatically shut down.

When you put the GO pod Air back in the case, it turns off and starts charging. The red light stays on while charging and turns off when fully charged.

When you take the GO pod Air earbuds out of the case to pair them, keep them close together—no more than 15 cm apart—or they might not connect properly.



"iFi Nexus"




Download the Nexus app for added features and future updates

Set up your Bluetooth connection using our iFi-Nexis APP

Please search for "GO pod Air" within the Nexus app.

The Nexus app helps you to use all functions and settings of the headset, such as digital filters to adjust the sound, Resetting of GO pod Air.

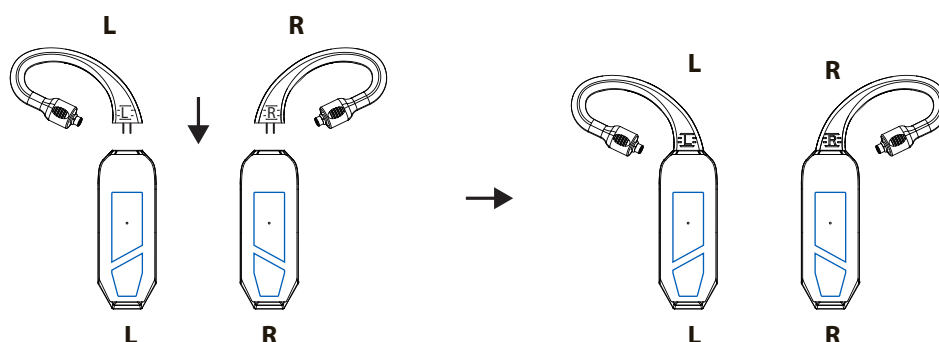

Ear loops connected to the GO pod Air touch control units

Two ear loop pairs are supplied: 0.78mm 2-pin, MMCX.



Scan the QR code to view the official iFi audio GO pod Air video on YouTube.

Cautions

1. Avoid extreme heat, cold and humidity.
2. Avoid dropping or crushing the GO pod Air, stressing ear loop by rapid pulling or extreme force, or bending ear loop at sharp angle.
3. If you experience discomfort or pain, try lowering the volume or discontinuing use temporarily.
4. If you experience regular discomfort while using this product, discontinue use and consult the physician.

Warning: Dry the GO pod Air completely before placing them in the charging case to avoid damaging the case.

SPECIFICATIONS

Bluetooth version :	Bluetooth 5.2
Codecs :	LDAC*, LHDC/HWA*, aptX Adaptive, aptX, AAC, SBC
Chipset:	Qualcomm QCC 5100 Series
Chipset:	10 m
Auto impedance detection:	16Ω/32Ω/64Ω
^Output Power (RMS/Max.):	≥57mW/0.96V @ 16Ω; ≥30mW/1.38V @ 64Ω
SNR:	≥123dB @ 32Ω / ≥124dB @ 64Ω
DNR:	≥123dB @ 32Ω
THD + N:	≤0.002% (1kHz/32Ω)
Frequency response:	10-40kHz (-3dB) Via LDAC
Battery:	
Pod	180mAh
Charging box	580mAh
Working hours:	
Pod	~7h
Charging box	~7h
Charging time:	
Pod	~1.5h
Charging box	1h
Power System:	Via USB-C 5V/0.7A
Dimensions:	
Pod	47.5 x 16.1 x 9.5 mm (1.87" x 0.63" x 0.4")
Charging box	97 x 94 x 45 mm (3.7" x 3.7" x 1.9")
Net weight:	
Pod	10 g (0.35 oz)
Charging box	106 g (4.44 oz)
Limited Warranty:	12 months**

12 months typical or as permitted/required by local reseller laws.

Specifications are subject to change without notice.

^See FAQ at ifi-audio.com for more information.

Qualcomm aptX and Snapdragon Sound are products of Qualcomm Technologies, Inc. and/or its subsidiaries.

Qualcomm, Snapdragon and Snapdragon Sound are trademarks or registered trademarks of Qualcomm Incorporated.

aptX is a trademark of Qualcomm Technologies International, Ltd.

LDAC and the LDAC Logo are trademarks of the Sony Corporation.