


Voilà

4" Round Downlight
Wall Wash

LUMENWERX

Project: _____

Type: _____

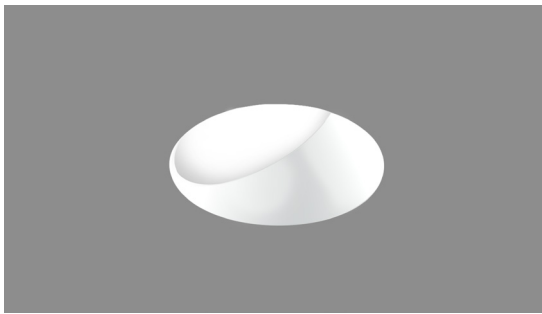

Trimless



Trim



Voilà 4" wall wash downlights feature innovative Hyflex™ optics for precise beam control. Shallow construction requires only 4" recess depth. Driver can be replaced through 2" aperture. The Voilà COB source with 90 CRI and 2-step color consistency matches other Lumenwerx luminaires, and is available with Chromawerx SOLA (dim-to-warm) and DUO (tunable white), as well as emergency option. Complete Voilà offering includes 2" and 4" apertures; downlights, adjustables, and wall washers; round and square trim; and cylinders; see separate specifications.

Performance

LUMEN OUTPUT ¹	WATTS	EFFICACY LM/W
1114 lm	14 W	80 lm/W
1511 lm	20 W	76 lm/W
2036 lm	28 W	73 lm/W

¹ Lumens packages are assuming 3500K, 80CRI, round white baffle

Delivered Lumens

CRI	80 CRI (At 35K)	90 CRI (At 35K)	97 CRI (At 30K)
Low - 13.8 W	1114	1036	891
Medium - 19.7 W	1511	1405	1208
High - 28 W	2036	1893	1628

Aperture Size

4.00"

Configurations



Fixed, adjustable & wall wash (see other spec sheets for all the configurations)

Baffle Depth



Standard 1.00"

Trim



Trim & Trimless

Baffle & Trim Flange Finishes

Textured matte white	
Textured matte black	
Mixed black & white	
Custom RAL	

Color Temperature

2700K	
3000K	
3500K	
4000K	
SOLA	
DUO	

Delivered 1114-2036 lm
14-28 Watts, up to 80 lm/W

Integral Drivers

0-10V, TRIAC, ELV, eldoLED & Lutron

Remote Drivers

Lutron, eldoLED and other drivers

Emergency battery pack

1 - Housing (Example: VO4RRWW-TRM-SW-OF-ASB-120-14W-D1)

Product Specification

LUMINAIRE ID	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTIONS	VOLTAGE	WATTAGE (80 CRI) ⁴	DIMMING		
VO4RRWW									
VO4RRWW - Voila 4" Round Recessed Wall Wash	TRM - Flanged trim TLMP - Trimless drywall mudplate TLMW - Trimless millwork	SW - Static white	OF - Open frame type non-IC IC ² - IC rated CP ² - Chicago Plenum type-IC (CCEA) ² IC/CP with low output only.	ACB - Adjustable commercial bar hangers (grid and drywall) ASB - Adjustable standard bar hangers (grid and drywall) FMB - Flush mount bars (drywall only) AHC - Adjustable hat channel bars	120 - 120V UNV - 120V-277V 347 ³ - 347V ³ Available with 0-10V dimming options D1, RD1 and RSD1 only. Consult factory for details.	14W - Low output 1114 lm 20W ⁵ - Medium output 1511 lm 28W ⁵ - High output 2036 lm For other lumen packages, please consult factory. ⁴ For delivered lumens and other CRI, see multiplier tables on page 3. ⁵ Available with OF housing only.	INTEGRAL D1 - 1% 0-10V ELV ⁶ - ELV 120V TRI ⁶ - TRIAC 120V LTEA2W ^{6,7} - Lutron 1% - 2 wire FP 120V LDE1 ⁷ - Lutron Hi-lume 1% Eco LDE5 ⁷ - Lutron 5% EcoSystem DA ⁷ - DALI ELDO ⁷ - eldoLED 0.1% ELD1 ⁷ - eldoLED 1% DEB ⁸ - 0-10V with onboard emergency battery backup ⁶ Available with 120V only. ⁷ Not available with CP installation type. ⁸ Available with OF housing only.	REMOTE RD1 - 1% 0-10V RELV ⁹ - ELV 120V RTRI ⁹ - TRIAC 120V RLTEA2W ⁹ - Lutron 1% - 2 wire FP 120V RLDE1 - Lutron Hi-lume 1% Eco RLDE5 - Lutron 5% EcoSystem RDA - DALI RELD0 - eldoLED 0.1% RELD1 - eldoLED 1% ⁹ Available with 120V only.	+EB ¹⁰ - Emergency battery ¹⁰ Specify with remote dimming only. The code will be like the following example: RD1 + EB .
		SOLA ¹ - Dim-to-warm DUO ¹ - Tunable white ¹ Available with OF housing only.					SOLA 25W - High output 1800-1981 lm DUO 20W - High output 1100-1200 lm	SOLA SD1 - Single 0-10V input DUO PSQ0 - Lutron T-Series 1% tunable white	SOLA RSD1 - Single 0-10V input DUO RDMX - To specify, see pages 7 to 9 RDDA - DALI RDD1 - Dual 0-10V input for CCT/intensity RPSQ0 - Lutron T-Series 1% tunable white

2 - Light (Example: VO4WW-SW-WW-2-90-27)

LUMINAIRE ID	LIGHT SOURCE	BEAM	COLOR QUALITY	CRI	COLOR TEMP
VO4WW		WW			
VO4WW - Voila 4" Wall Wash	SW - Static white	WW - Wall wash	2 - 2 Step MacAdam Ellipse	90 - 90 CRI 80 - 80 CRI 97 - 97 CRI (not available for 3500K)	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K
	SOLA - Dim-to-warm DUO - Tunable white		3 - 3 Step MacAdam Ellipse	90 - 90 CRI (SOLA and DUO)	SOLA - Dim-to-warm 35K-22K DUO - Tunable white 27K-65K



3 - Baffle (Example: VO4RRB-TRM-WW-SR-TMW-TMW)

LUMINAIRE ID	TRIM STYLE	LENS	BAFFLE POSITION	BAFFLE FINISH	TRIM FLANGE FINISH
VO4RRB		WW	SR		
VO4RRB - Voila 4" Round Recessed Baffle	TRM - Flanged trim TLMP - Trimless drywall mudplate TLMW - Trimless millwork	WW - Wall wash diffuser	SR - Standard regress	TMW - Textured matte white TMB - Textured matte black CF# - Custom finish, specify RAL#. (e.g. CF102B)	TMW ¹¹ - Textured matte white TMB ¹¹ - Textured matte black CF# ¹¹ - Custom finish, specify RAL#. (e.g. CF102B) NA - None ¹¹ Applicable for TRM only.

Photometrics

Please follow the multiplier tables to ensure correct lumen value. Baffle color, CCT, CRI and baffle shape will change the lumen value.

36" from Wall - 48" Spacing

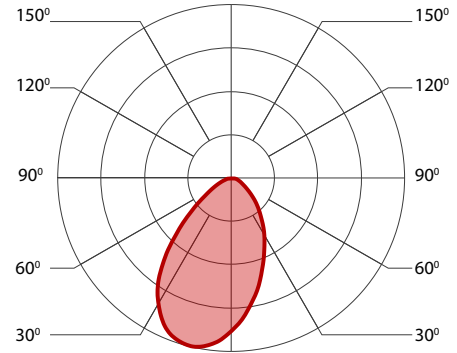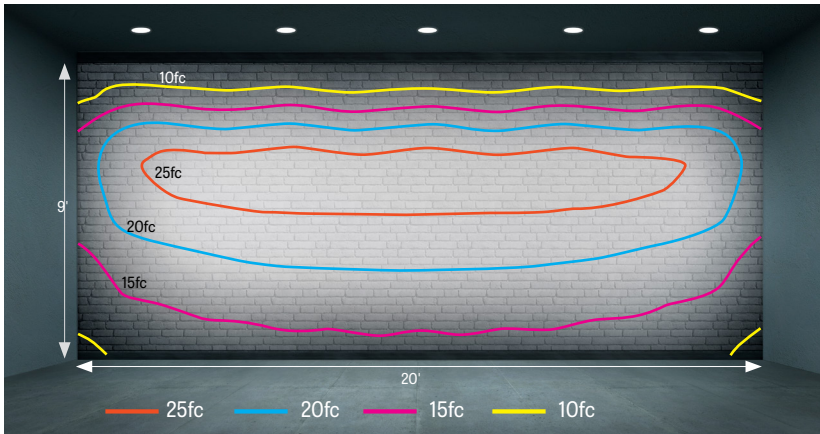

Foot-Candles for Round White Wall Wash Baffles

FC ON WALL 36" FROM WALL - 36" SPACING				36" FROM WALL - 48" SPACING			36" FROM WALL - 60" SPACING			
DISTANCE FROM CEILING		80 CRI (At 35K)	90 CRI (At 35K)	97 CRI (At 30K)	80 CRI (At 35K)	90 CRI (At 35K)	97 CRI (At 30K)	80 CRI (At 35K)	90 CRI (At 35K)	97 CRI (At 30K)
	3"		7	7	6	5	5	4	4	4
6"		8	8	7	6	6	5	5	5	4
12"		11	10	9	8	7	6	7	6	5
2'		25	22	19	19	17	15	17	15	13
3'		37	33	29	28	25	22	24	21	18
4'		40	36	31	30	27	23	24	22	19
5'		37	33	29	28	25	22	22	20	17
6'		32	29	25	24	22	19	19	17	15
7'		28	25	23	21	19	16	17	15	13
8'		24	22	19	18	17	15	14	13	11

Delivered Lumens

CRI	80 CRI (At 35K)	90 CRI (At 35K)	97 CRI (At 30K)
Low - 13.8 W	1114	1036	891
Medium - 19.7 W	1511	1405	1208
High - 28 W	2036	1893	1628

Efficacy Based on Delivered Lumens - High 28 W

	LPW
80 CRI	73
90 CRI	68
97 CRI	58

Multiplier - CCT

CCT	Multiplier
2700K	0.9
3000K	0.95
3500K	1
4000K	1.05

Multiplier - Baffle Color and Shape

BAFFLE VARIABLES		
White	Round	1
White	Square	1
Black	Round	0.95
Black	Square	0.95

For SOLA and DUO, please consult factory.

Technical Specification

DESCRIPTION Compact fixed 4" wall wash with multiple output, color, and dimming options.

HOUSING CONSTRUCTION For new construction, 20 gauge powder coated steel. Open frame, type-IC, or Chicago Plenum (CCEA) rated. 18 gauge galvanized steel junction box with ½" trade size knockouts. Adjustable hanger bars and butterfly brackets are included. Hat channel and flush mounted brackets are also available.

Clearance Height: Open frame/Type-IC/Chicago Plenum: 4";
Open frame with DEB or PSQO (Duo) options: 8"

Ceiling Thickness: Can accommodate ½" to 1"

Housing weight: Type-IC/Chicago Plenum - 8 lbs -3.6 kg
Open Frame - 6 lbs -2.7 kg

Ceiling cut out: Ø5 5/32" for round, 4 2 3/32"x4 2 3/32" for square

FIELD REPLACEABLE LIGHT ELEMENT

LED Module: Integral COB module. 90 CRI and 2 SDCM, Standard with options of 80 CRI, or 97 CRI. L80 > 60,000 hours

Light Output: From 1114-2036 lumens

HyFlex™ Optics: Proprietary TIR/reflector

Thermal Management: Cold-forged aluminum heat sink to maximize thermal dissipation

WALL WASH BAFFLE

Round die-cast aluminum retained with rare earth magnets (trimmed) or clips (trimless). Integral angled wall wash lens.

Trim style options: Round and square with flanged trim, trimless with mudplate for drywall, or trimless for millwork.

CHROMAWERX SOLA (dim-to-warm) and **DUO** (tunable white). See pages 6 for more information.

ELECTRICAL

Integral: 0-10V, ELV, TRIAC, Lutron EcoSystem, Lutron Hi-lume, DALI, eldoLED 0.1%, eldoLED 1%, Lutron T-Series (tunable white).

Remote: 0-10V, ELV, TRIAC, Lutron EcoSystem, Lutron Hi-lume, DALI, eldoLED 0.1%, eldoLED 1%, DMX, Lutron T-Series (tunable white).

Emergency Options: Emergency battery back-up options are available as integral (Fulham), or remote (Fulham, Bodine, or IOTA). The battery provides 10W of power.


ENVIRONMENT Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

LISTING cETLus listed to UL 1598 and CAN/CSA Standard C22.2 No. 250.0


WARRANTY 5 year limited warranty on LED module and power supply. Guaranteed to maintain 70% lumen maintenance.

Installation Types


Open Frame

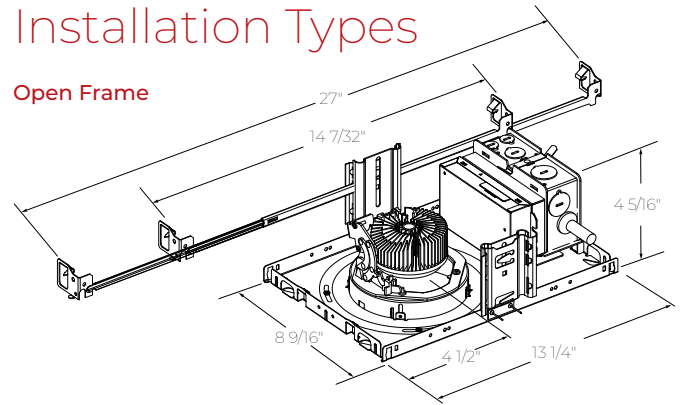


Type-IC / Chicago Plenum

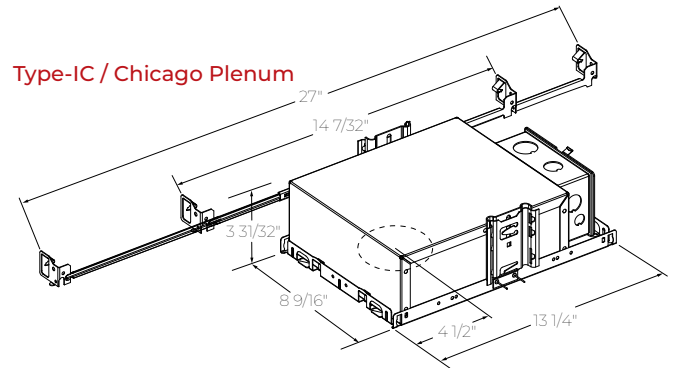


Mounting Options




ACB - Adjustable Commercial Bar Hangers



ASB - Adjustable Standard Bar Hangers



FMB - Flush Mount Bars



AHC - Adjustable Hat Channel Bars

Voilà


4" Round Downlight
Wall Wash

LUMENWERX


Project: _____

Type: _____

Light

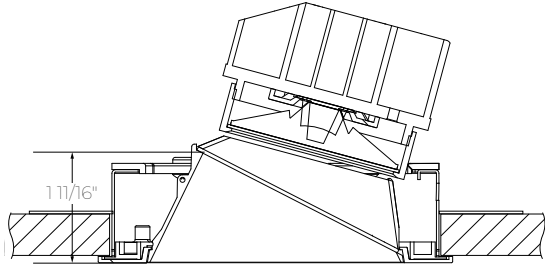

Standard Baffle

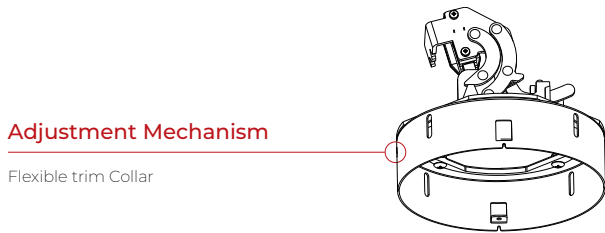

Adjustment Mechanism

Flexible trim Collar



Light Element

Heat Sink
LED Module
Hyflex™ Optics



Retaining Ring

Magnetic Snap



Baffle & Lens

Standard Regress
Wall Washer Lens



Trim

Trim and Trimless

Optics

Hyflex™ optics provide precise optical control in a remarkably compact form. The core of this four-tier system is compound reflector with a central TIR element, just 1.06" deep.

Light Source - LED

Compact COB (Chip-On-Board) LED module, available in 2700K, 3000K, 3500K and 4000K with a choice of 80 CRI or 90 CRI with elevated R9 value (for 97 CRI, consult factory). Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Beam



Wall Wash

Integral Driver

Unless otherwise specified, Voila comes standard with an integral, 120-277VAC/60Hz, electronic, 1% 0-10V dimming, constant-current LED driver. The driver is field replaceable and features a high power factor, low THD and sources 1 mA on the 0-10V dim line. All integral drivers are located inside the housing and are easily accessible from below the ceiling through the aperture. All dimming drivers comply with IEEE C62.41 surge protection requirements.

Emergency Integral

Factory installed, long-life, high-temperature, LED driver with integrated emergency backup using a recyclable LiFePO4 battery pack. Features a remote test switch with charge indicator, minimum of 90 minutes operation and 10W per downlight emergency lighting output. Recharge time of 12 hours.

Emergency Remote

Long-life, high-temperature, emergency LED driver with Lithium Ion battery pack. Features a test switch with charge indicator, minimum of 90 minutes operation and 10W per downlight emergency lighting output. Recharge time of 24 hours.

Voilà

4" Round Downlight
Wall Wash


LUMENWERX

Project: _____


Type: _____

Trim Dimensions

Trimless



Trim

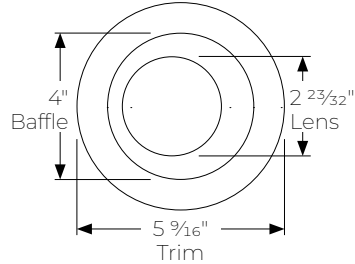

CHROMAWERX

Chromawerx Sola is single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

CHROMAWERX

Chromawerx Duo offers a two-channel control system which uses analog or digital protocols for synchronous control of both warm (2700K) to cool (6500K) LED arrays - maintaining a CRI above 90. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures.

Baffle



Standard Regress

Trimless




Black Baffle



White Baffle


Trim



White Baffle,
Black Trim



Black Baffle,
White Trim




Black Baffle,
Black Trim



White Baffle,
White Trim

DUO GENERIC DMX NETWORK ARCHITECTURE


A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

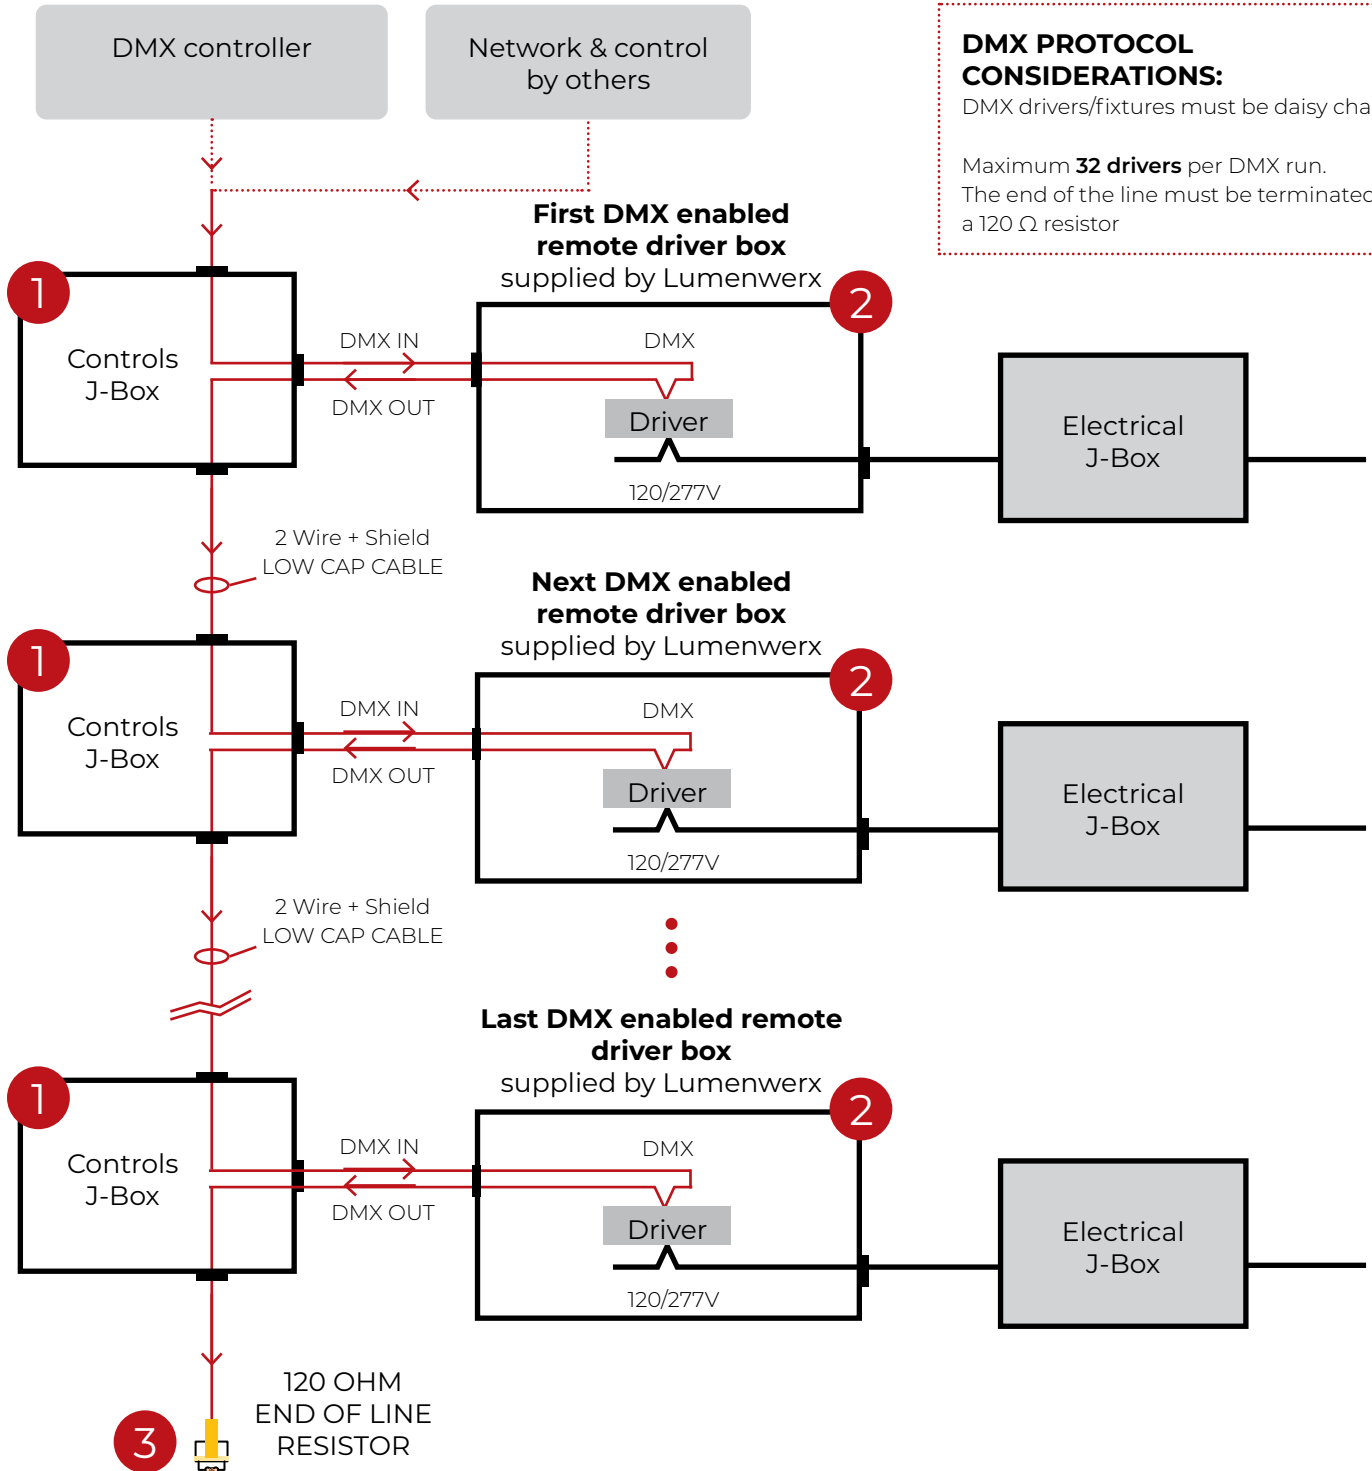

DMX PROTOCOL CONSIDERATIONS:
DMX drivers/fixtures must be daisy chained.


Maximum **32 drivers** per DMX run.
The end of the line must be terminated by a 120 Ω resistor

1 J-BOX DMX DAISY CHAIN DETAIL

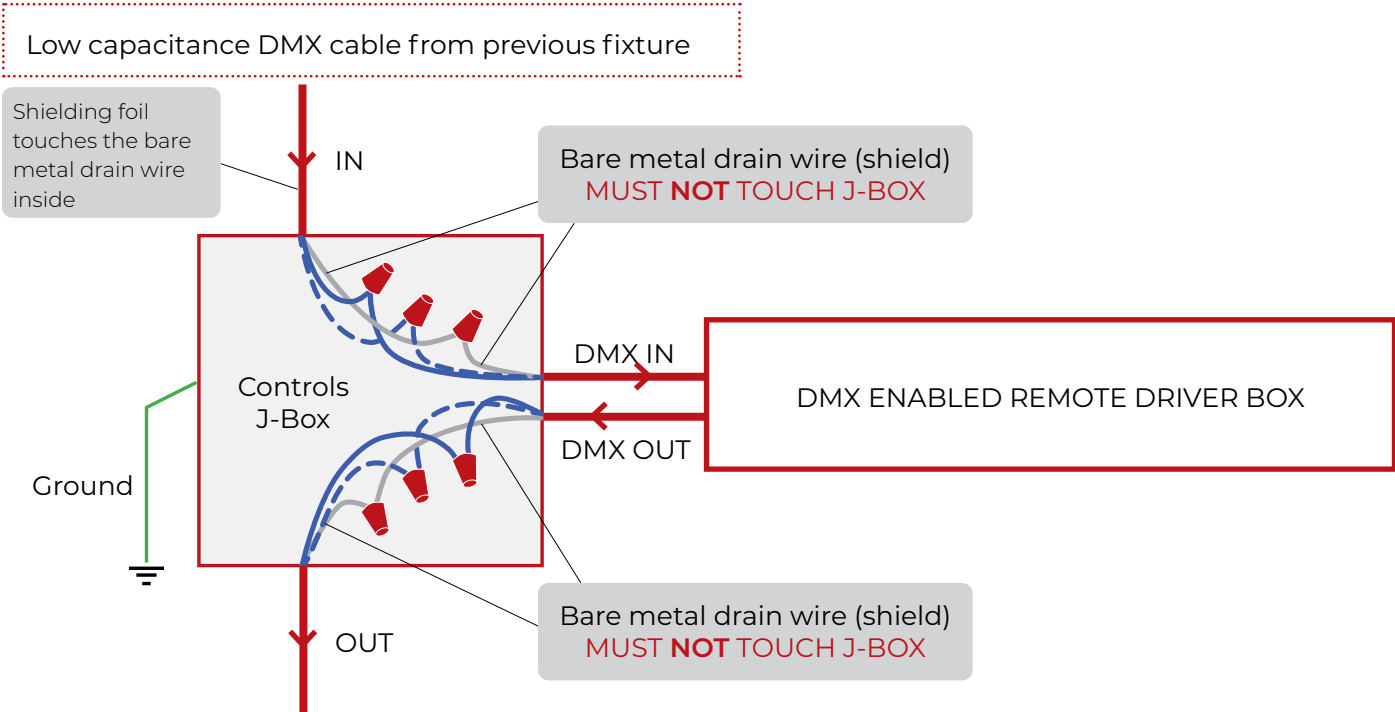

Low capacitance DMX cable to next fixture

2 DMX CONNECTION REMOTE DRIVER

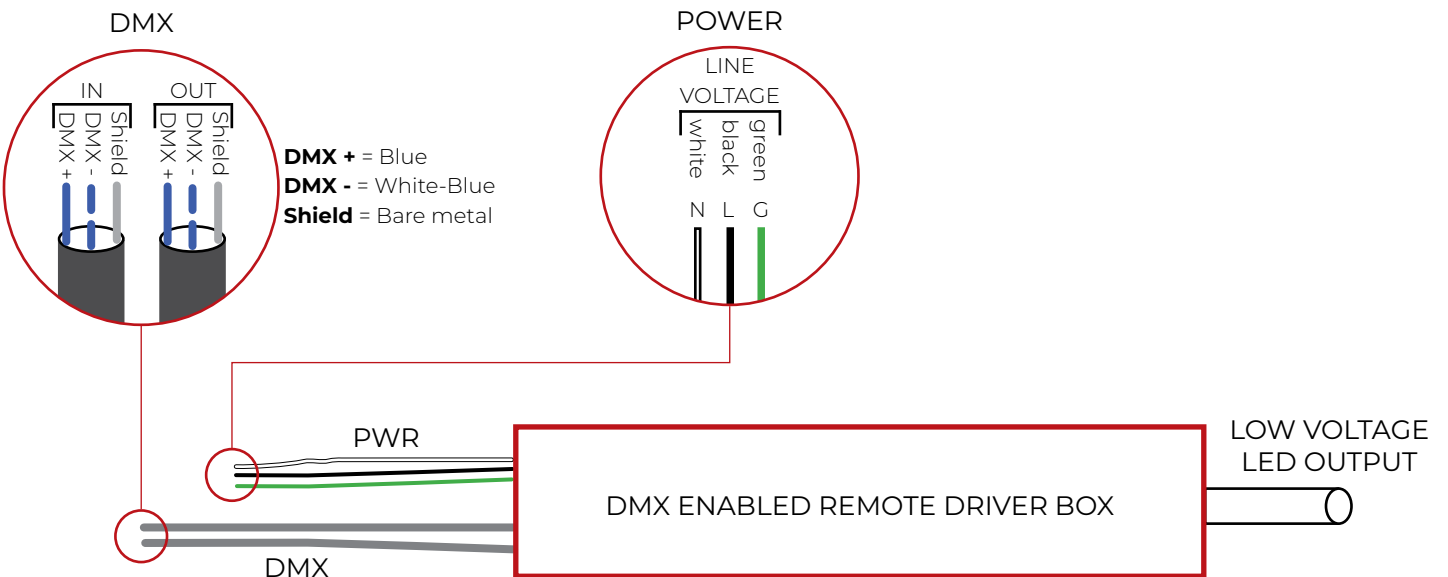

3 LAST DMX CONNECTION DETAIL

