

**davide groppi**

HANDBOOK 2025 - AU

INDEX

<b>WIRELESS</b>	13
35MM	15
BUGIA	19
PoPuP	25
POST PRANDIUM	31
QuiQuoQua	39
TeTaTeT	45
TeTaTeT Flûte	61
VIS À VIS	71
<b>TABLE</b>	79
ABA	81
ANIMA	85
CALVINO	93
FM	97
MOON T	105
PIGRECO	111
RIBBON	115
<b>FLOOR</b>	121
BANNER	123
HASHI	127
MASAI	133
MISTER	141
MOON F	145
MOVIE	151
ORIGINE	155
PABLO	163
Q	169
SAMPEI	175
SHOJI	183
STOP	187

<b>SUSPENSION</b>	195
CATHODE	197
FOSBURY	207
LED IS MORE	211
LOUIS XIV	215
MAGIA	221
MISS	235
MOON	245
NEURO	259
OVO	269
OVONELPIATTO	273
REFLEX S	277
SHANGHAI	283
SIMBIOSI	287
SOTTILE	297
SOTTOSOPRA	309
SPY	315
<b>WALL</b>	319
DOT P	321
DUET	331
EDISON'S NIGHTMARE	335
FILM	339
FOIL	343
FOLDER	347
LINET	355
MIRA	359
MIRA MAGNETIC	367
RAIL	373
REFLEX	377
SHADE	381
SOL 1	385
SOL 2	389
SPOT	393
TOAST	401
VICEVERSA	407

<b>CEILING</b>	413
ASINTOTO	415
AURORA	421
DOT PL 51	427
HAKO PL	433
MINI PL 51	437
NULLA PL	441
PUNTO PL	445
PUNTO 2 PL	449
SANMARTINO	453
TRICK TRACK	457
<b>RECESSED</b>	461
DOT R	463
MINI 51	469
MINI BIT 51	473
MIRA R	477
NULLA	483
PUNTO	503
<b>SYSTEMS</b>	509
ENDLESS	511
FLASH	543
INFINITO	563
OHM	583
UTOPIA	599
<b>TRACKS - PROFILES</b>	611
BINARIO TRIFASE	613
COLIBRI	629
FRAMELESS	645
LIGHTLINE 0808	653
LIGHTLINE 1010	660
LIGHTLINE 1508	666
LIGHTLINE 2612	673
LIGHTLINE 7454	680

<b>OUTDOOR</b>	687
BELLADINOTTE	689
BUBKA	693
BUBKA BOLLARD	699
BUIO	703
BUIO - SPOT	713
CHILLOUT	721
GRILLO	725
HAZARD	729
IMU	733
JULIET	737
LENTA	741
NEURO OUTDOOR	745
NUIT	751
ORIGINE OUTDOOR	757
Q²	763
SAMPEI OUTDOOR	767
SHOJI OUTDOOR	775
SPOT OUTDOOR	779
<b>BULBS</b>	783
DG111 LED MODULES	785
DRIVERS	787
COMMON ACCESSORIES	790
SUSPENSION KITS	792
COMMERCIAL TERMS	785

INDEX



Our codification system consists of a fifteen-digit structure defined as follows:

1	A	3	0	0	0	3	0	0		2	7		0	0
PRODUCT FAMILY					FINISH		INTERNAL USE ONLY		-	COLOUR TEMPERATURE*		-	ELECTRIFICATION	

Finish

0	0	Standard
0	1	Polished Chrome
0	3	Matt White
0	4	Matt Black
0	8	Brushed Brass
1	0	Stainless Steel
1	3	Black Brushed Stainless Steel
1	4	Brushed Chrome
1	5	Natural Brass
1	8	Matt Gold
1	9	Polished Gold
2	0	Magic Blue
2	6	Total Black
2	7	Gravity Black
2	8	Polished Black Chrome
2	9	Brushed Bronze
3	0	Grey Blue
3	1	Black Red
3	2	Copper Oxide
3	3	Black Green
3	4	Matt White - Black Bicolour
3	5	Grey Green
3	6	Brushed Black
3	7	Copper Brown
3	8	Blasted Inox
3	9	Matt White - Polished Gold
4	0	Grey Beige
4	1	Umbra Grey
4	9	Matt Black - Polished Gold

Colour temperature

0	0	Light source not included
2	2	2200K
2	7	2700K
3	0	3000K
9	6	2700K / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

\* Excluding tracks and profiles

Electrification

0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

The Davide Groppi handbook is a confidential document and cannot be disclosed.  
In this document the drawings and technical information are to be considered indicative.  
All product features and technical measurements are available on our website  
davidegroppi.com

General data on the product

Mounting - Lighting - Use - Material - Finish - Note

Model specifications

Technical data - Certifications - Codes



# NULLA

Davide Groppi / 2010

Recessed / Direct / Indoor



Material Metal  
Finish .00 Standard

Note Recessed luminaire. Visible 18/25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance. Apparecchio illuminante da incasso. Foro visibile con diametro di 18/25 mm. NULLA 18 e NULLA 25: apparecchio estraibile per manutenzione.

**NULLA - 23°**  
14W  
24V DC  
2700K - 425lm / 3000K - 458lm  
CRI >90  
Beam 23°  
UGR <19  
Driver not included  
CE  IP20/IP65 

Standard - 2700K  
Standard - 3000K

1A4100000.27.20  
1A4100000.30.20

**NULLA - 32°**  
14W  
24V DC  
2700K - 538lm / 3000K - 579lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE  IP20/IP65 

Standard - 2700K  
Standard - 3000K

1A2110000.27.20  
1A2110000.30.20

398

Compulsory and optional accessories

Accessories finishes and specifications - Codes

Reference model

# NULLA

Davide Groppi / 2010

## Compulsory accessories / Accessori obbligatori

### Installation kits / Kit d'installazione

Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm					Not included
Matt Black	Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00		

Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm					Not included
Matt Black	Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00		

Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm					Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00		

Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm					Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	NULLA 25	1A3980400.00.00		

Plasterboard flange (bottom) ± 12,5 mm / Flangia (da sotto) per cartongesso ± 12,5 mm					Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	NULLA 25	1A4960400.00.00		

### Drivers / Alimentatori

Driver / Alimentatore					Not included
220-240V(100-127V) 24V/16W(15W)IP20/DALI			12024180.24		

Driver / Alimentatore					Not included
220-240V(100-127V) 24V/20W(15W)IP20/PUSH			120240870.24		

Driver / Alimentatore					Not included
220-240V 24V/20W/IP20/TRIAC/IGBT			120240850.24		

400





**Class II luminaire:** luminaire whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.



**Class III luminaire:** luminaire whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the luminaire is powered by a SELV safety transformer/driver in compliance with legislation in force. The luminaire must not be connected to ground conductors.



Degree of protection against access of foreign bodies, dust and water.



Luminaire with this symbol can only use low pressure bulbs or bulbs with safety glass.



Do not use cold light lamps.



To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along the optical axis of the luminaire to the closest lighting object.



**Color Rendering Index:** the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra=100.



The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the delivered lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.



Luminaire designed to be powered by ENDLESS conductive tape.



Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.



Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR\* <19).

All Davide Groppi products, except those specifically indicated,  
are equipped with electronic light sources (LED).  
The selection of diodes is carried out with the utmost care to guarantee  
the highest levels of performance and luminous uniformity.



**WIRELESS**

## 35MM

Alessandra Dallagiovanna - Davide Groppi / 2009



Those dear old slides. Nobody pays any attention to them anymore.

It's the smallest lamp in our collection.

It's an idea, a thought, a pendant, something you can wear.

The pulsating light and the images you choose to display on it  
make 35MM unique and exceptional.




35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Objects / Diffuse / Wireless

Material Metal - Polycarbonate  
Finish .00 Standard


Note Battery-operated wearable luminaire. Matt white front. Glossy black back.  
Customised image not included. Intermittent light.



**35MM**  
0,3W  
ON/OFF  
Batteries 2xCR2032 included  
CE  IP20

Standard - ON/OFF

| 1A2640000.00.00 |

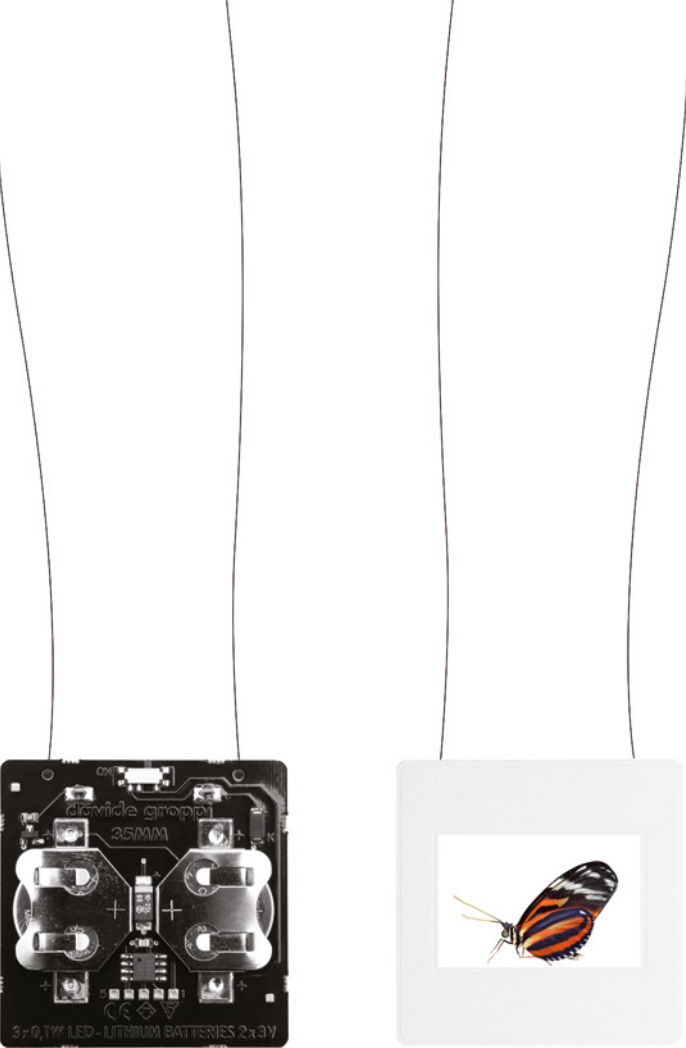



## BUGIA

Davide Groppi / 2018

A lightweight and soft light.  
A lamp designed to enjoy wonderful diffuse light but without an electrical cable.



BUGIA

Davide Groppi / 2018

Table / Diffuse / Wireless

Material


Metal - Methacrylate

Finish

.18 Matt Gold

Note

Rechargeable table luminaire. Matt white diffuser. Gold finish base.  
Battery life: 9 hours.



BUGIA

2W

3000K - 120lm

CRI >90

Driver with plug not included

USB cable included

ON/OFF


CE IP20

Matt Gold - 3000K - ON/OFF

1A2351800.30.00

Optional accessories

Drivers



Driver with plug


Not included

Matt Black

Input 110-240V - 50/60Hz  
Output 5V DC - 2A - 10W - IP20

1Z0000088

Other accessories



USB to USB-C cable

Included

Matt Black

Length 1 m

1Z0000132







## PoPuP

Davide Groppi / 2016



Light\*Music\*Wireless

Created to give you both light and music any place, at any time.




PoPuP accompanies you during your unforgettable moments.

The sounds it produces are dynamic and of excellent quality.

Light and sound can also be enjoyed separately.

Listen to the light.

Table / Direct / Wireless	
Material	Metal - Methacrylate
Finish	.03 Matt White
Note	Rechargeable table luminaire and speaker. Magnetic fixing stem. Battery life: 12 hours light only and 30 hours audio only at medium volume.

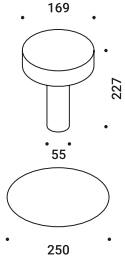		<b>PoPuP</b> 2W 3000K - 183lm CRI >80 Driver with plug included ON/OFF 5W Audio - 50-20000Hz CE IP20		Matt White - 3000K - ON/OFF	1A2610300.30.00
<b>Optional accessories</b>					
<b>Drivers</b>					
					
		<b>Driver with plug</b>		Included	
		Matt Black	Input 110-240V - 50/60Hz Output 10000mAh - 4,2-14V DC 18W - IP20	1Z1530030	
<b>Other accessories</b>					
					
		<b>Rechargeable battery</b>		Included	
		Matt White	12V DC - NiMH 3700mAh Battery life 12 hours light only and 30 hours audio only at medium volume	1A2620300.00.00	











## POST PRANDIUM



Davide Groppi / 2023

During a meal with friends, a ladle is reused to scoop up the light  
and serve it onto the table.  
A project from many years ago, today in a new wireless version.  
**Archiproducts Design Award 2023**

Table / Direct / Wireless	
Material	Metal - Methacrylate
Finish	.01 Polished Chrome
Note	Rechargeable table luminaire. Details with polished gold finish. Matt black base. Battery life: 9 hours.

	<b>POST PRANDIUM</b>	
	2W 3000K - 171lm CRI >90 Driver with plug not included USB cable included ON/OFF CE  IP20	Polished Chrome - 3000K - ON/OFF   1A4550100.30.00

Optional accessories

Drivers			
	<b>Driver with plug</b>		Not included
	Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088
Other accessories			
	<b>USB to USB-C cable</b>		Included
	Matt Black	Length 1 m	1Z0000132







Al Gatto Verde Restaurant  
Modena







## QuiQuoQua

Davide Groppi / 2017

The light where you want it.

A unique suspension lamp with a rechargeable battery.  
The light source is applied magnetically to a metal dish that hangs from the ceiling  
using a very thin steel wire. The effect is delicately elegant.  
QuiQuoQua takes light where it is needed, without the limitation of electric wires.



QuiQuoQua

Davide Groppi / 2017

Suspension / Direct / Wireless

Material


Metal - Methacrylate

Finish

.03 Matt White

Note

Rechargeable suspension luminaire. Magnetic fixing LED module.  
Matt white rose. AISI 304 stainless steel suspension cable.  
Battery life: 8 hours.

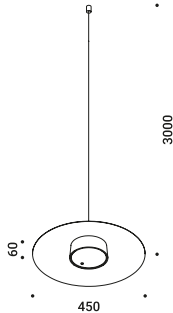

**QuiQuoQua**  
5W  
3000K - 345lm  
CRI >80  
Driver with plug included  
ON/OFF  
CE IP20


Matt White - 3000K - ON/OFF | 1A2630300.30.00 |

Davide Groppi / 2017

QuiQuoQua


Optional accessories

Drivers




Driver with plug			Included
Matt Black	Input 110-240V - 50/60Hz Output 9V DC - 3A - 30W - IP20	1Z1120710	

LED modules




LED module			Included
Matt Black	5W - 3000K - 345lm - CRI >80 Rechargeable lithium battery 9V DC Li-Ion 5800mAh - Battery life 8 hours	1A0570400.30.00	

Suspension kits



Sloped ceiling suspension kit			Not included
	Nickel plated - 1 Piece	1A0510000.00.00	




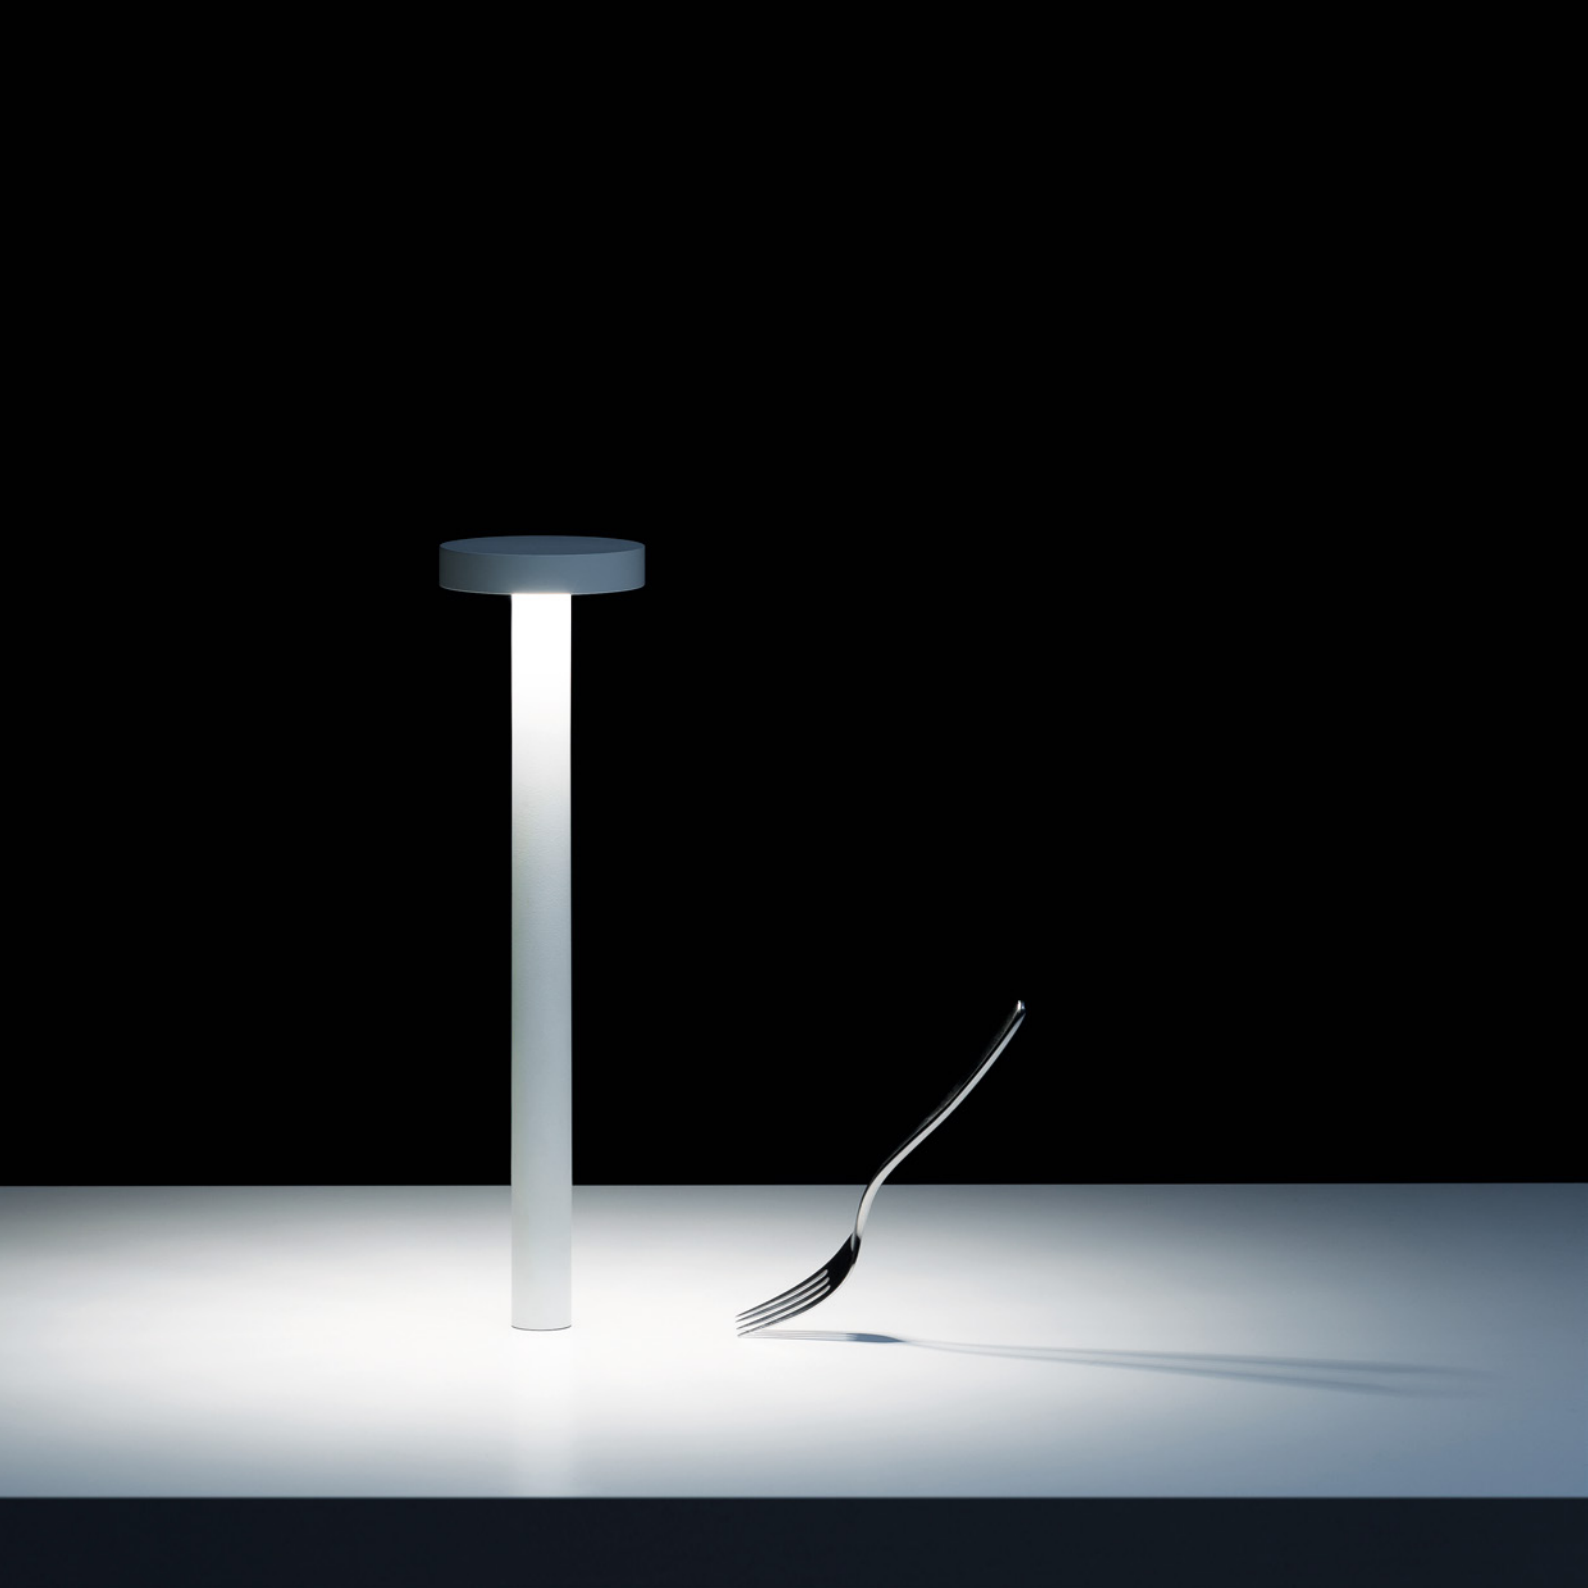

A timeless icon with an eye on the future.  
Portable and rechargeable, the greatest expression of freedom.  
With TeTaTeT, every table becomes a meeting place, a complete dining experience.  
Its light caresses those it illuminates with pure emotion.  
Equipped with Touch technology and a magnetic fixing base.  
**Mention of Honour XXIV Compasso d'Oro ADI 2016**



Table / Direct / Wireless						
Material	ABS - Metal - Methacrylate					
Finish	.03	Matt White	.18	Matt Gold	.27	Gravity Black
	.31	Black Red	.33	Black Green	.35	Grey Green
					.30	Grey Blue
					.40	Grey Beige
Note	Rechargeable table luminaire. Magnetic fixing stem. Touch ON/OFF. Battery life: 12 hours.					



TeTaTeT


2W  
2700K - 165lm / 3000K - 178lm  
CRI >90  
Driver with plug included  
ON/OFF




Matt White - 2700K - ON/OFF	1A0310300.27.00
Matt White - 3000K - ON/OFF	1A0310300.30.00
Matt Gold - 2700K - ON/OFF	1A0311800.27.00
Matt Gold - 3000K - ON/OFF	1A0311800.30.00
Gravity Black - 2700K - ON/OFF	1A0312700.27.00
Gravity Black - 3000K - ON/OFF	1A0312700.30.00
Grey Blue - 2700K - ON/OFF	1A0313000.27.00
Grey Blue - 3000K - ON/OFF	1A0313000.30.00
Black Red - 2700K - ON/OFF	1A0313100.27.00
Black Red - 3000K - ON/OFF	1A0313100.30.00
Black Green - 2700K - ON/OFF	1A0313300.27.00
Black Green - 3000K - ON/OFF	1A0313300.30.00
Grey Green - 2700K - ON/OFF	1A0313500.27.00
Grey Green - 3000K - ON/OFF	1A0313500.30.00
Grey Beige - 2700K - ON/OFF	1A0314000.27.00
Grey Beige - 3000K - ON/OFF	1A0314000.30.00

Optional accessories

Drivers



Other accessories




Driver with plug			Included
Matt Black	Input 110-240V - 50/60Hz Output 6V DC - 1A - 6W - IP20	1Z0000073	

Rechargeable battery			Included
Matt White	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0430300.00.00	
Matt Gold	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0431800.00.00	
Gravity Black	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0432700.00.00	
Grey Blue	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433000.00.00	
Black Red	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433100.00.00	
Black Green	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433300.00.00	
Grey Green	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433500.00.00	
Grey Beige	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0434000.00.00	

Table		Not included
Matt White	1A4020300.00.00	
Matt Black	1A4020400.00.00	



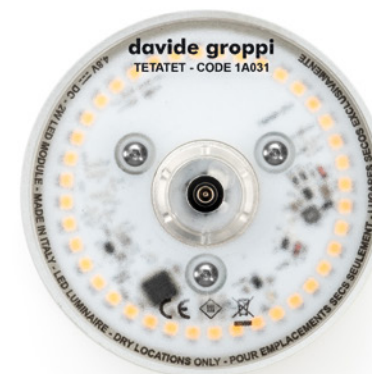



Matt White



Grey Blue



Black Green



Matt Gold




Grey Green




Gravity Black




Black Red

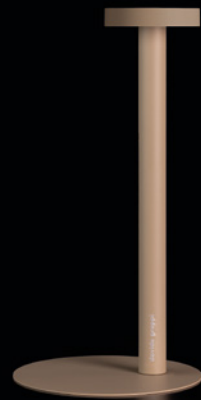

Grey Beige

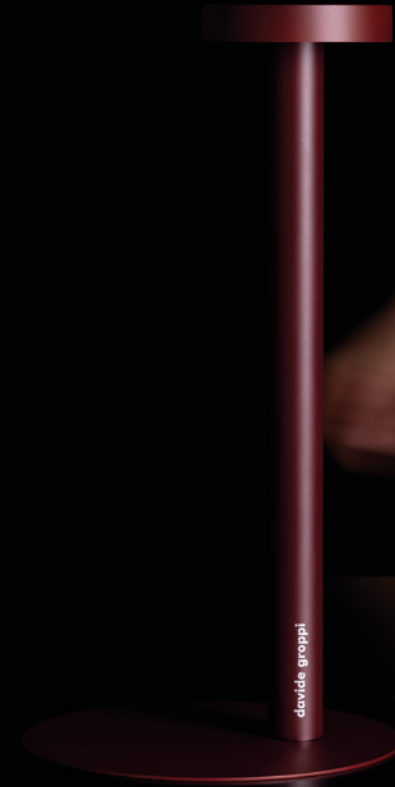







Hosteria in Certosa Restaurant  
Venezia



Torre del Saracino Restaurant  
Vico Equense










## TeTaTeT Flûte

Davide Groppi / 2017

This is an evolution of our TeTaTeT lamp.  
The lamp head is lightweight and appears to be floating in air.  
The transparent stem brings to mind the glasses used in the classic “mise en place”.  
Magnetic fixing base.

Material	ABS - Metal - Methacrylate
Finish	.03 Matt White
Note	Rechargeable table luminaire. Magnetic fixing transparent stem. Magnetic LED module. Battery life: 9 hours.

	<b>TeTaTeT Flûte</b> 2W 2700K - 167lm / 3000K - 180lm CRI >90 Driver with plug not included USB cable included ON/OFF CE IP20	Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF	1A2360300.27.00 1A2360300.30.00
---	--	--	------------------------------------

Driver with plug			Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088	
LED module			Included
Matt White	2W - 2700K - 167lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.27.00	
	2W - 3000K - 180lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.30.00	
USB to USB-C cable			Included
Matt Black	Length 1 m	1Z0000132	
Table			Not included
Matt White		1A4020300.00.00	
Matt Black		1A4020400.00.00	







Identità Golose Milano Restaurant  
Milano

TeTaTeT Flûte







## VIS À VIS

Michele Groppi / 2023



Vis à Vis is a magic trick, between technique and illusion.  
Once again, we decided to take away, seeking only the light.  
Transparency is the main feature of this battery-powered lamp.

**German Design Award 2025**


**Elle Deco International Design Award 2024**

**Archiproducts Design Award 2023**




VIS À VIS

Michele Groppi / 2023

Table / Direct / Wireless	
Material	ABS - Methacrylate
Finish	.00 Standard
Note	Rechargeable table luminaire. Transparent disc with refractive effect. Magnetic fixing LED module and transparent stem. Battery life: 9 hours.

	<b>VIS À VIS</b>		
	2W		
	2700K - 110lm / 3000K - 113lm		
	CRI >90	Standard - 2700K - ON/OFF	1A4530000.27.00
	Driver with plug not included	Standard - 3000K - ON/OFF	1A4530000.30.00
USB cable included			
ON/OFF			
CE IP20			

Optional accessories

Drivers			
	<b>Driver with plug</b>		Not included
	Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088
LED modules			
	<b>LED module</b>		Included
	Standard	2W - 2700K - 110lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.27.00
		2W - 3000K - 113lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.30.00
Other accessories			
	<b>USB to USB-C cable</b>		Included
	Matt Black	Length 1 m	1Z0000132





**Mies van der Rohe Pavilion**  
Barcelona





**TABLE**






Inspired by the shape of a traditional lampshade.  
The bulb is not shielded but displayed, and it peeks out from the shade.



ABA

Omar Carraglia / 2007

Table / Diffuse / Indoor	
Material	Metal - Methacrylate
Finish	.03 Matt White
Note	Table luminaire. Dimmer on the cable. White cable.



**ABA**

Max 10W - E27

100-240V - 50/60Hz

Dimmer on board

Bulb not included


CE □ IP20 ⏏ 0,5 m

Matt White - Dimmer on board

1A2700309.00.06

Optional accessories

Bulbs



LED - E27 - G125	Not included
220-240V - 7W - 360°	1Y2080010
2700K - 806lm - CRI >80	
Energy Efficiency E - Dimmable	





## ANIMA

Davide Groppi - Giorgio Rava / 2021

A slender, light, ephemeral and abstract sculpture, it is a weightless ideogram.  
It's the emotion of an indirect light with an aesthetic poised between Scandinavian and Japanese design, two apparently distant cultures but, actually, very close.  
At the top, an open circle, almost a hook for fishermen of the soul.

**XXVIII Compasso d'Oro ADI Award 2024**

**AZ Award 2022**

**Archiproducts Design Award 2021**



Compasso d'Oro ADI  
Award 2024

ANIMA

Davide Groppi - Giorgio Rava / 2021

Table-Floor / Indirect / Indoor

Material


ABS - Carbon fiber - Metal

Finish

.04 Matt Black

Note

Table luminaire. Touch ON/OFF and adjustment. Black cable.



ANIMA

4W

5V DC

2700K - 575lm / 3000K - 589lm

CRI >80

Driver with plug not included

USB cable included

Dimmer on board

CE RoHS IP20

Matt Black - 2700K - Dimmer on board


1A1090400.27.06

Matt Black - 3000K - Dimmer on board

1A1090400.30.06

Optional accessories

Drivers



Driver with plug

Not included


Matt Black

Input 110-240V - 50/60Hz

Output 5V DC - 2A - 10W - IP20

1Z0000088

Other accessories



USB to USB-C cable

Included

Matt Black

Length 1 m

1Z0000132

Power bank

Not included

10000mAh/36Wh

Output 5V DC

Battery life 10 hours

1A1990000.00.00













## CALVINO


Davide Groppi / 2018

Full and empty, shadow and light.  
A circular mirror to be positioned as you please,  
to both light and capture the surrounding space.  
**Born Series Award 2019**


CALVINO

Davide Groppi / 2018

Table / Indirect / Indoor	
Material	Brass - Metal - Methacrylate - Mirror
Finish	.00 Standard
Note	Table luminaire. Disc with mirror finish adjustable in all directions. Matt blue rear disc. Matt black base. Brass stem. Dimmer on the cable. Black cable.

	<b>CALVINO</b>	
	18W	
	24V DC	
	2700K - 1275lm / 3000K - 1372lm	
	CRI >90	
Driver with plug included		
Dimmer on board		
C E IP20		
Standard - 2700K - Dimmer on board		1A2710000.27.06
Standard - 3000K - Dimmer on board		1A2710000.30.06

Optional accessories

Drivers		
	<b>Driver with plug</b>	
	Included	
	Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 18W - IP20 1Z0431020








An antenna of light.

Antennas are mysterious, absolute and intrinsically beautiful,  
because their essentialness expresses nothing more than their function.

A performing, adjustable and extremely comfortable light.

**Mention of Honour XXVIII Compasso d'Oro ADI 2024**

**Archiproducts Design Award 2022**









Private Residence  
Amsterdam






## MOON T

Davide Groppi / 2019



Moon was created from the dream of bringing the moon inside your own home.  
The hand-made Japanese paper surface makes every lamp unique.  
Suspension and floor versions also available.

Table / Diffuse / Indoor	
Material	Japanese paper - Metal - PE
Finish	.00 Standard
Note	Table luminaire. PE and Japanese paper shade. Gold finish base. Dimmer on the cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping. A deliberate feature of MOON design is the creased, glued and overlapping effect of the paper. The used material is sensitive to humidity. This product is not suitable for use in high humidity environments.

	<b>MOON T</b> Max 15W - E27 100-240V - 50/60Hz Dimmer on board Bulb not included CE  IP20	
	Standard - Dimmer on board	1A2690009.00.06
<b>Optional accessories</b> Bulbs 	<b>LED - E27 - A60</b>	
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790
<b>Other accessories</b>	<b>Moisture barrier bag</b>	
	Packaging for air and sea shipping	4A2690010










A rigorous project in its design.  
A dialogue between two essential, concrete and tangible materials: wood and glass.  
Part frosted and part transparent, it moves feely on the base,  
functioning both as diffuser and convex lens.

Table / Diffuse / Indoor	
Material	Glass - Oak wood
Finish	.00 Standard
Note	Table luminaire. Sanded glass ball. Oak wood base. Dimmer on the cable. Black cable.




**PIGRECO**

6,5W  
24V DC  
3000K - 450lm  
CRI >90  
Driver with plug included  
Dimmer on board

CE IP20

Standard - 3000K - Dimmer on board	1A2600000.30.06
------------------------------------	-----------------

Optional accessories

Drivers		Included	
	Driver with plug		
	Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 18W - IP20	1Z0431020



## RIBBON

Maurici Ginés / 2024



The ribbon is a symbol of union and continuity.

The light reaches the table spontaneously,  
almost as if a continuation of the electric cable.

Ribbon is the result of research into simple and intuitive graphic gestures.

A project that brings light to the table, in a certain formal sense.



RIBBON

Table / Direct / Indoor

Material


Brass - Metal - Silicone

Finish

.04 Matt Black

Note

Table luminaire. Adjustable in all directions. Touch ON/OFF and adjustment. Black cable.



RIBBON

6W

5V DC

2700K - 450lm / 3000K - 450lm

CRI >90

Driver with plug not included

USB cable included

Dimmer on board

CE IP20

Matt Black - 2700K - Dimmer on board


1A5850400.27.06

Matt Black - 3000K - Dimmer on board

1A5850400.30.06

Optional accessories

Drivers



Driver with plug

Not included


Matt Black

Input 110-240V - 50/60Hz

Output 5V DC - 2A - 10W - IP20

1Z0000088

Other accessories



USB to USB-C cable


Included

Matt Black

Length 1 m

1Z0000132



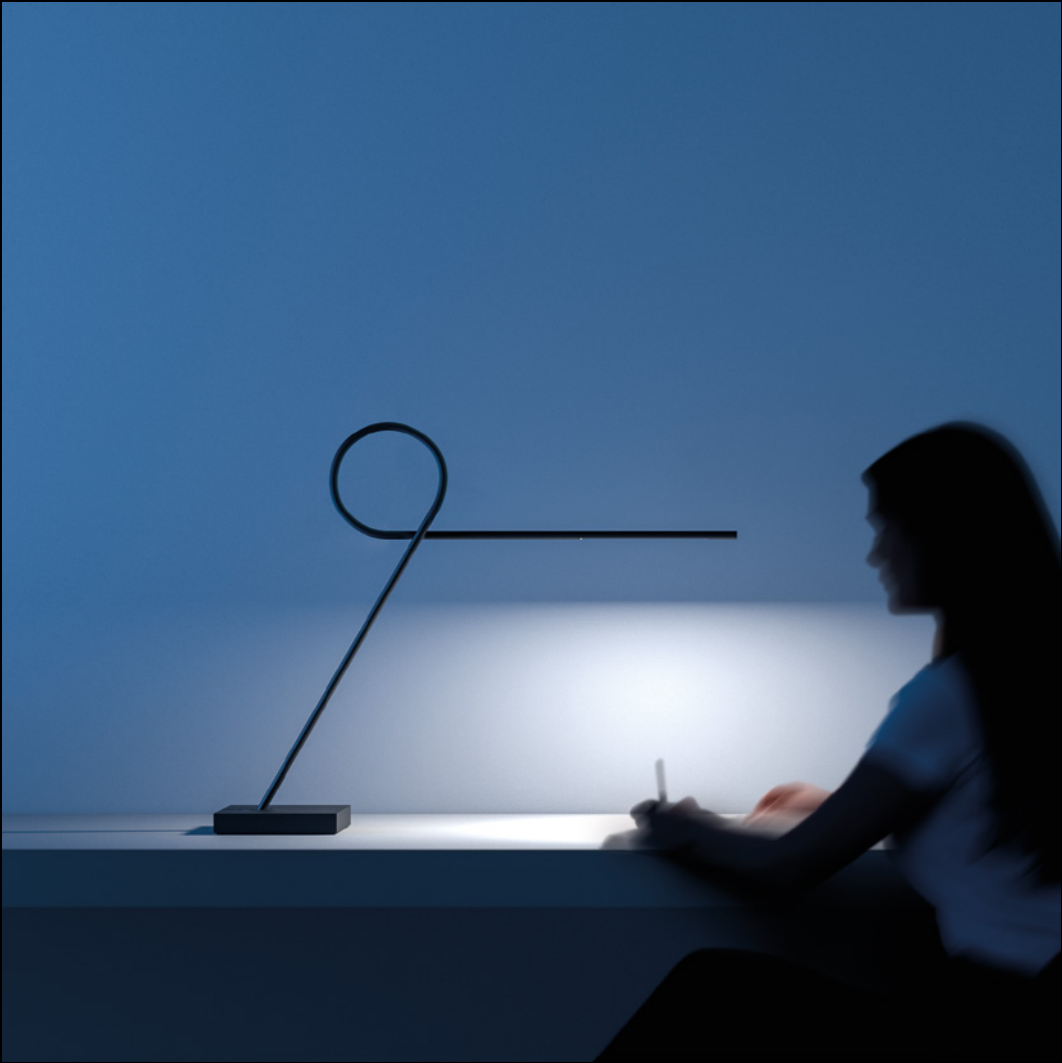

**FLOOR**





## MODERNA

model\_designer7model\_2024

A solution that is part fixed and part mobile.  
The lamp is fixed to the wall, but is powered by a cable and normal electrical plug.  
Banner is one of our many solutions for bringing light where you need it,  
with the greatest freedom

BANNER

Mauro Ferrari / 2004

Floor / Indirect / Indoor	
Material	Metal - Polycarbonate
Finish	.03 Matt White
Note	Floor lamp with wall fixing. Connection cable not included.




BANNER

90W  
110-240V - 50/60Hz  
2700K - 11083lm / 3000K - 11918lm  
CRI >80  
Driver integrated  
DALI  
C E IP20

Matt White - 2700K - DALI  
Matt White - 3000K - DALI

1A1840300.27.01  
1A1840300.30.01




BANNER

90W  
110-240V - 50/60Hz  
2700K - 11083lm / 3000K - 11918lm  
CRI >80  
Driver integrated  
Dimmer on board  
C E IP20

Matt White - 2700K - Dimmer on board  
Matt White - 3000K - Dimmer on board

1A1840300.27.06  
1A1840300.30.06

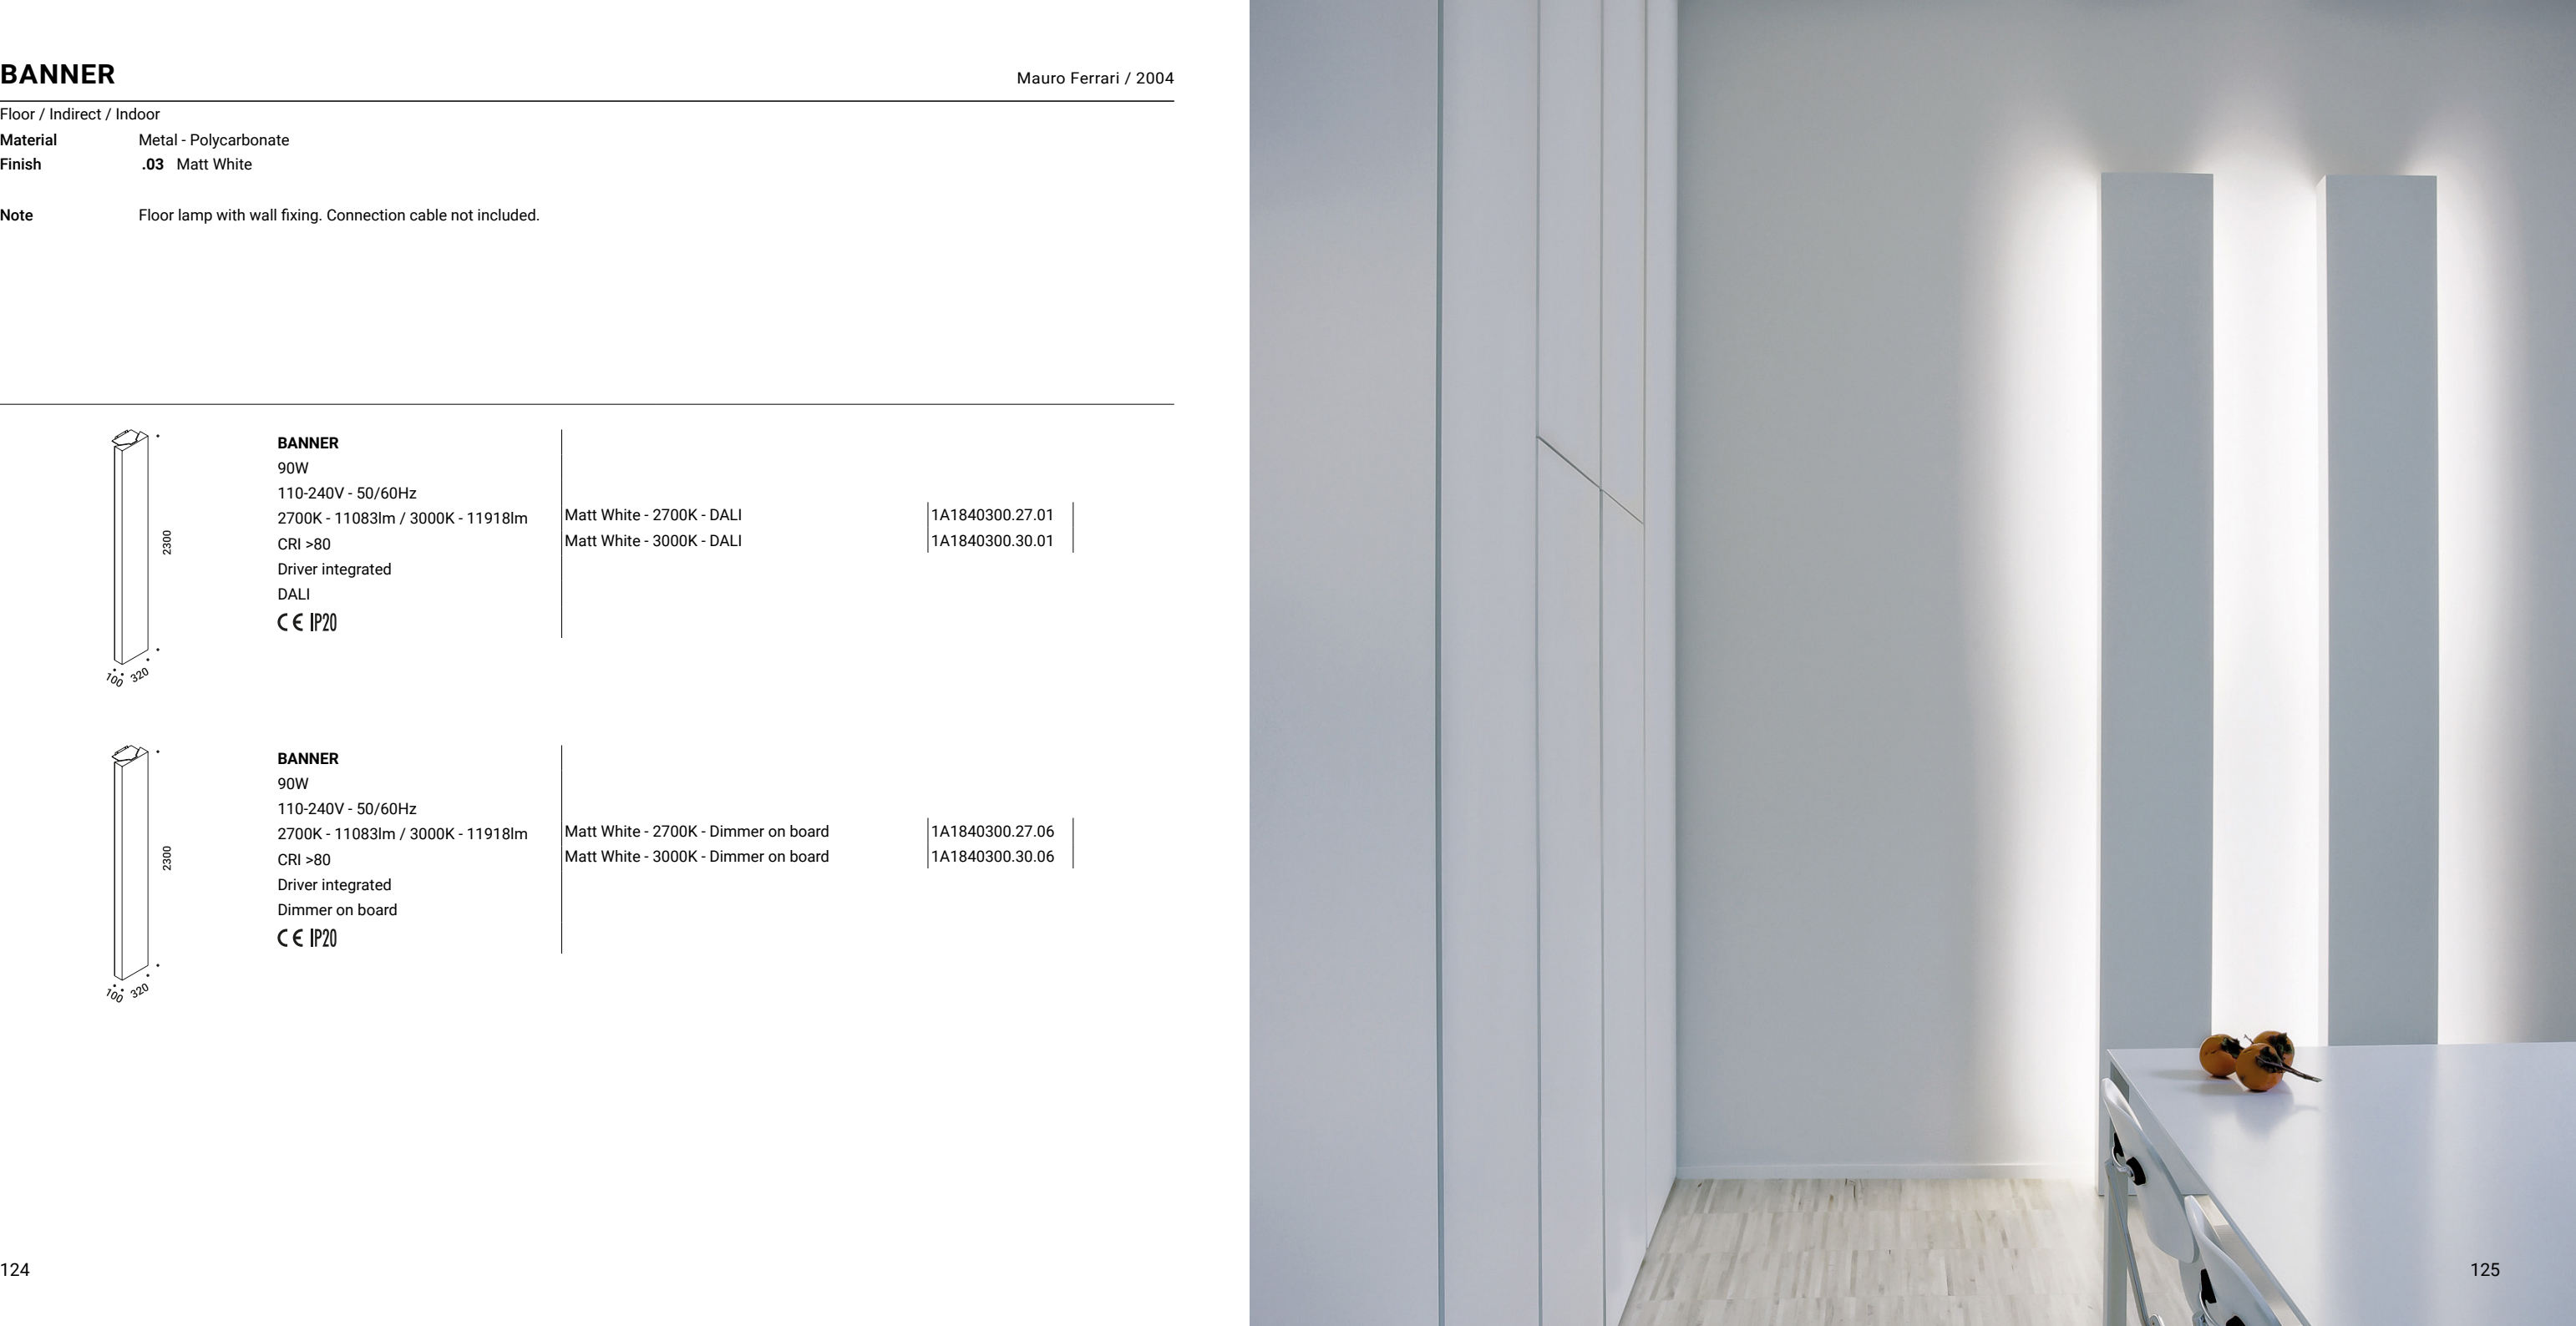



## HASHI

Federico Delrosso / 2017




A floor lamp conceived to provide direct light in a simple and flexible manner. Its principle component is the pivot point between two “chopsticks” (Hashi) that serve as light sources which, positioned in different ways, create a strong, graphic effect in space. Particular care has been given to the proportions. The sticks always appear lightweight and balanced.



HASHI

Federico Delrosso / 2017

Floor / Direct / Indoor		
Material	Metal - Methacrylate	
Finish	.04 Matt Black	.18 Matt Gold
Note	Floor luminaire. Adjustable along the vertical axis. Dimmer on the cable. Black cable.	

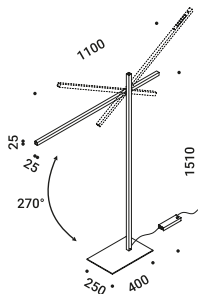

**HASHI**  
15,5W  
110-240V - 50/60Hz  
2700K - 765lm / 3000K - 823lm  
CRI >90  
UGR <19  
Driver integrated  
Dimmer on board  
CE IP20

Matt Black - 2700K - Dimmer on board  
Matt Black - 3000K - Dimmer on board  
Matt Gold - 2700K - Dimmer on board  
Matt Gold - 3000K - Dimmer on board

1A2510409.27.06  
1A2510409.30.06  
1A2511809.27.06  
1A2511809.30.06









A tribute to Alberto Giacometti and to his thin fellows...  
A lamp for lighting pictures, powered by an ordinary electrical socket.  
The lamp has an adjustable light and it can be oriented.  
The lamp section is reduced to a minimum.

MASAI

Maurizio Mancini / 2015

Floor-Suspension / Indirect / Indoor

Material

Brass - Methacrylate

Finish

.03

Matt White

.04

Matt Black

.08

Brushed Brass

Note


Floor luminaire with ceiling fixing. Adjustable along the vertical axis. Matt white rose. AISI 304 stainless steel suspension cable. Dimmer on the cable. Transparent cable. MASAI 2: version with power cable only and without driver.

Maurizio Mancini / 2015


MASAI

Compulsory accessories


Drivers



Driver				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	MASAI 2	1Z0241180.24	




Driver				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V	MASAI 2	1Z0240870.24	




Driver				Not included
220-240V	24V/20W/IP20/TRIAC/IGBT	MASAI 2	1Z0240850.24	

Optional accessories


Suspension kits




Sloped ceiling suspension kit			Not included
	Nickel plated - 1 Piece	1A0510000.00.00	




Recessed suspension kit for 12,5 mm plasterboard			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.03.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.03.00	



Ceiling suspension kit			Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00	
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00	



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	



304 Stainless steel suspension cable			Not included
	Lenght 10 m	1A1680000.00.00	








Marconi Restaurant  
Sasso Marconi

## MISTER

Omar Carraglia / 2013

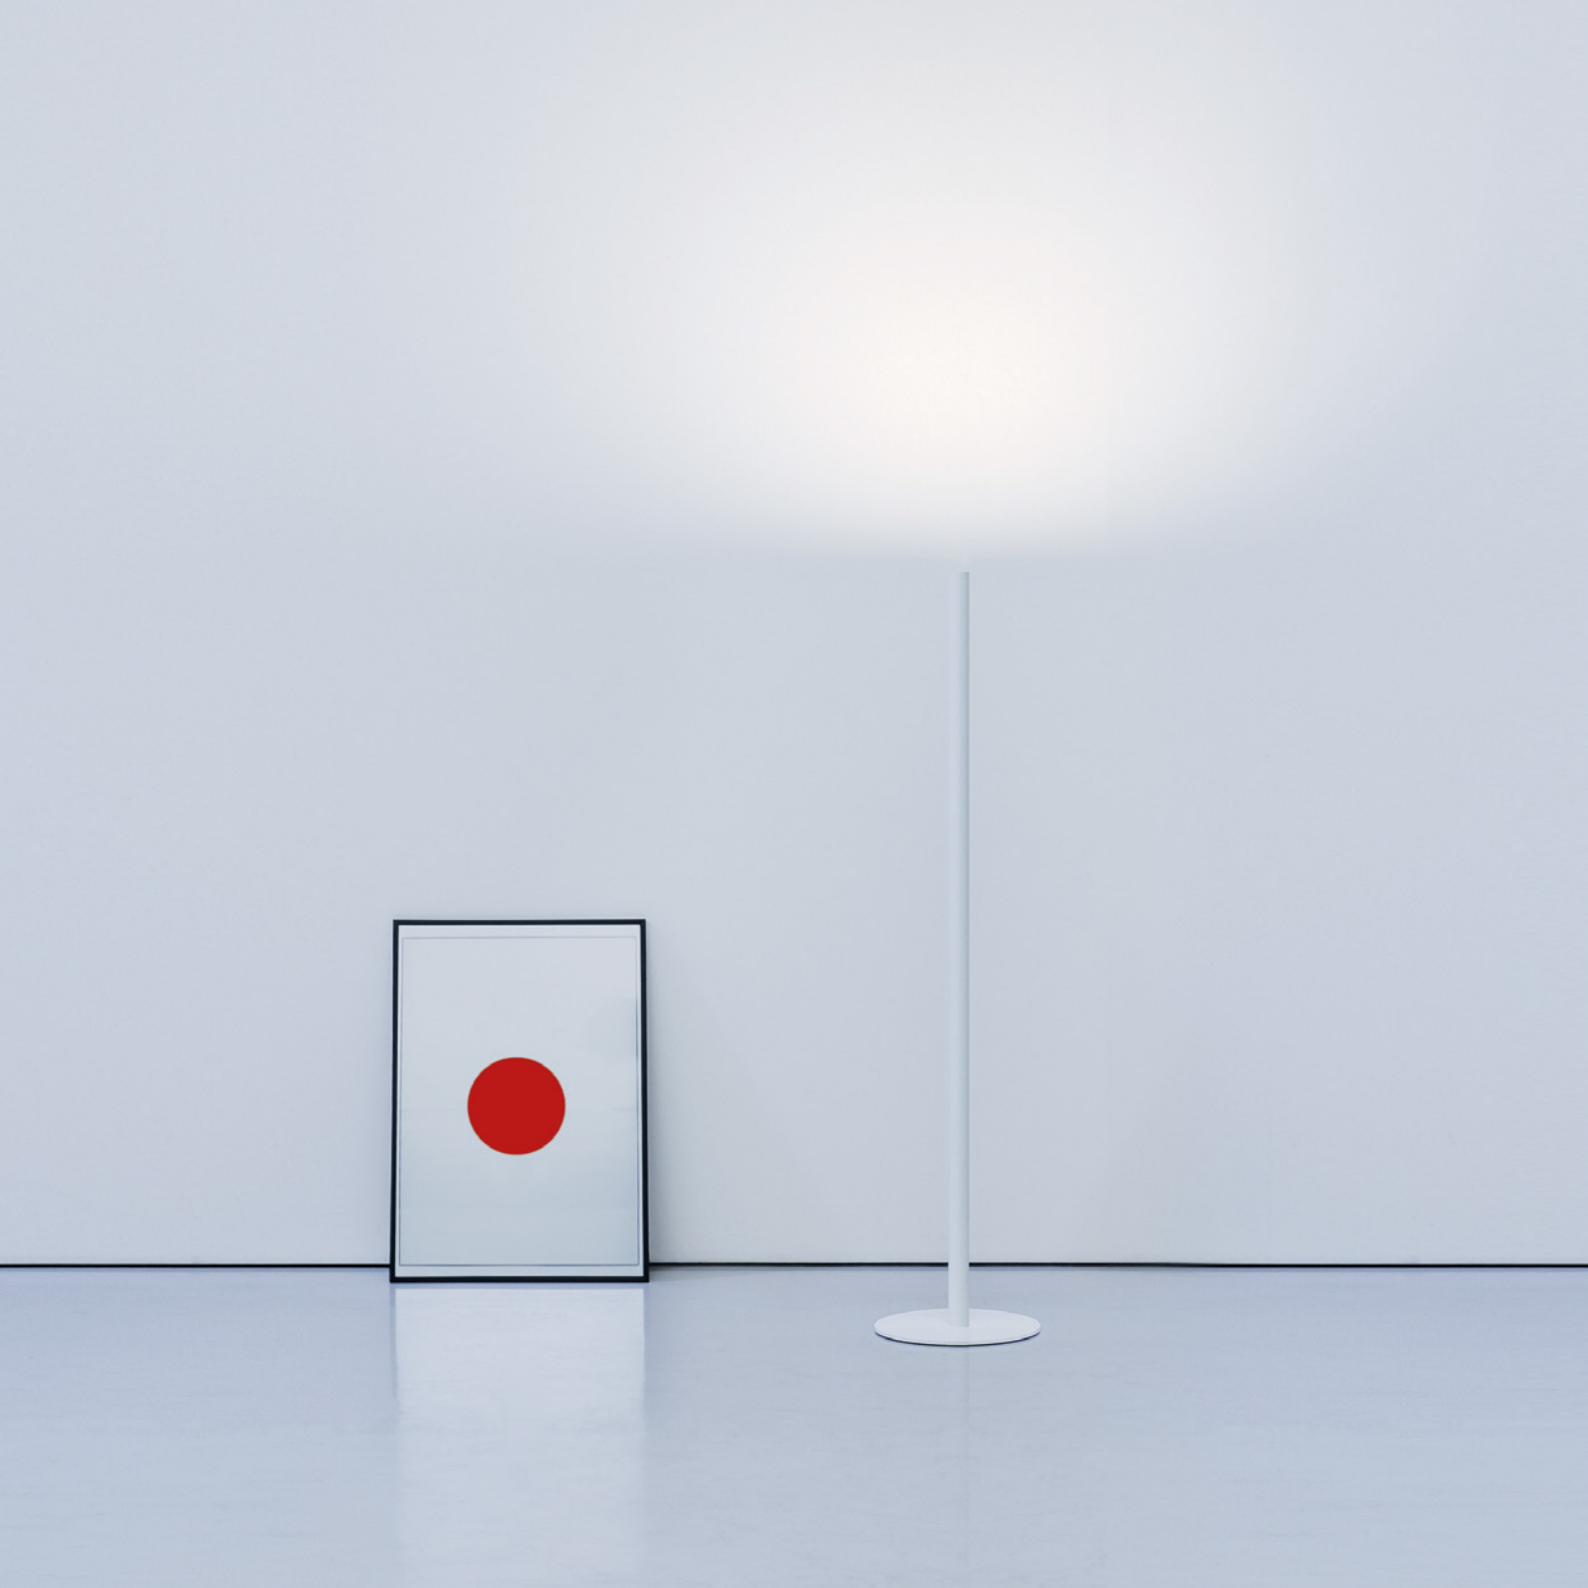

Portable light.

A floor tool to grant a wonderful indirect light in the purest possible way.




Floor / Indirect / Indoor

Material	Metal - Methacrylate		
Finish	.03 Matt White	.04	Matt Black

Note

Floor luminaire. Dimmer on the cable. White cable for the matt white finish, black cable for the matt black finish.

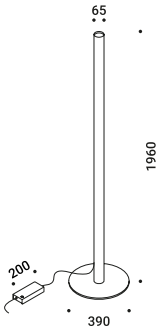

**MISTER**  
33W  
110-240V - 50/60Hz  
2700K - 2771lm / 3000K - 2884lm  
CRI >90  
Driver integrated  
Dimmer on board



Matt White - 2700K - Dimmer on board  
Matt White - 3000K - Dimmer on board  
Matt Black - 2700K - Dimmer on board  
Matt Black - 3000K - Dimmer on board

1A2750309.27.06  
1A2750309.30.06  
1A2750409.27.06  
1A2750409.30.06



## MOON F

Davide Groppi / 2023





Moon was created from the dream of bringing the moon inside your own home.  
The hand-made Japanese paper surface makes every lamp unique.  
Suspension and table versions also available.

MOON F



Davide Groppi / 2023

Floor / Diffuse / Indoor	
Material	Japanese paper - PE
Finish	.00 Standard
Note	Floor luminaire. PE and Japanese paper shade. Matt white base. Dimmer on the cable. White cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate compulsory for MOON 120 F model. A deliberate feature of MOON design is the creased, glued and overlapping effect of the paper. The used material is sensitive to humidity. This product is not suitable for use in high humidity environments.

	<b>MOON 80 F</b> Max 15W - E27 100-240V - 50/60Hz Dimmer on board Bulb not included CE IP20	Standard - Dimmer on board	1A4880009.00.06
	<b>MOON 120 F</b> Max 2x25W - E27 100-240V - 50/60Hz Dimmer on board Bulb not included CE IP20	Standard - Dimmer on board	1A4890009.00.06

MOON F

Davide Groppi / 2023

<b>Optional accessories</b>			
Bulbs			
	LED - E27 - A60		Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 80 F	1Y0330790
	LED - E27 - A150		Not included
	220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120 F	1Y2160020
Other accessories			
Moisture barrier bag			
	Packaging for air and sea shipping	MOON 80 F	4A2840010
Wooden crate			
	Packaging for air and sea shipping	MOON 120 F	49860010
Moisture barrier bag			
	Packaging for air and sea shipping	MOON 120 F	49860020





## MOVIE


Omar Carraglia / 2005

To “play” with the light.  
A RGBW system lets you create all the light of the world.  
To feel the light and to live it in all its spectrum.

MOVIE


Omar Carraglia / 2005

Floor / Indirect / Indoor		
Material	Metal - Polycarbonate	
Finish	.03 Matt White	.13 Black Brushed Stainless Steel
Note	Floor luminaire. RGBW wireless control. Black cable.	

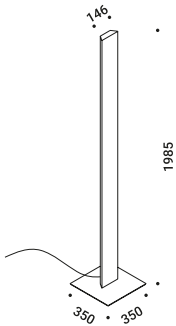

**MOVIE**  
80W  
100-240V - 50/60Hz  
2832lm  
CRI >90  
Driver integrated  
Dimmer on board  
RGBW wireless control  
CE □ IP20

Matt White - RGBW - Dimmer on board	1A2740309.98.06
Black Brushed Stainless Steel - RGBW - Dimmer on board	1A2740309.98.06

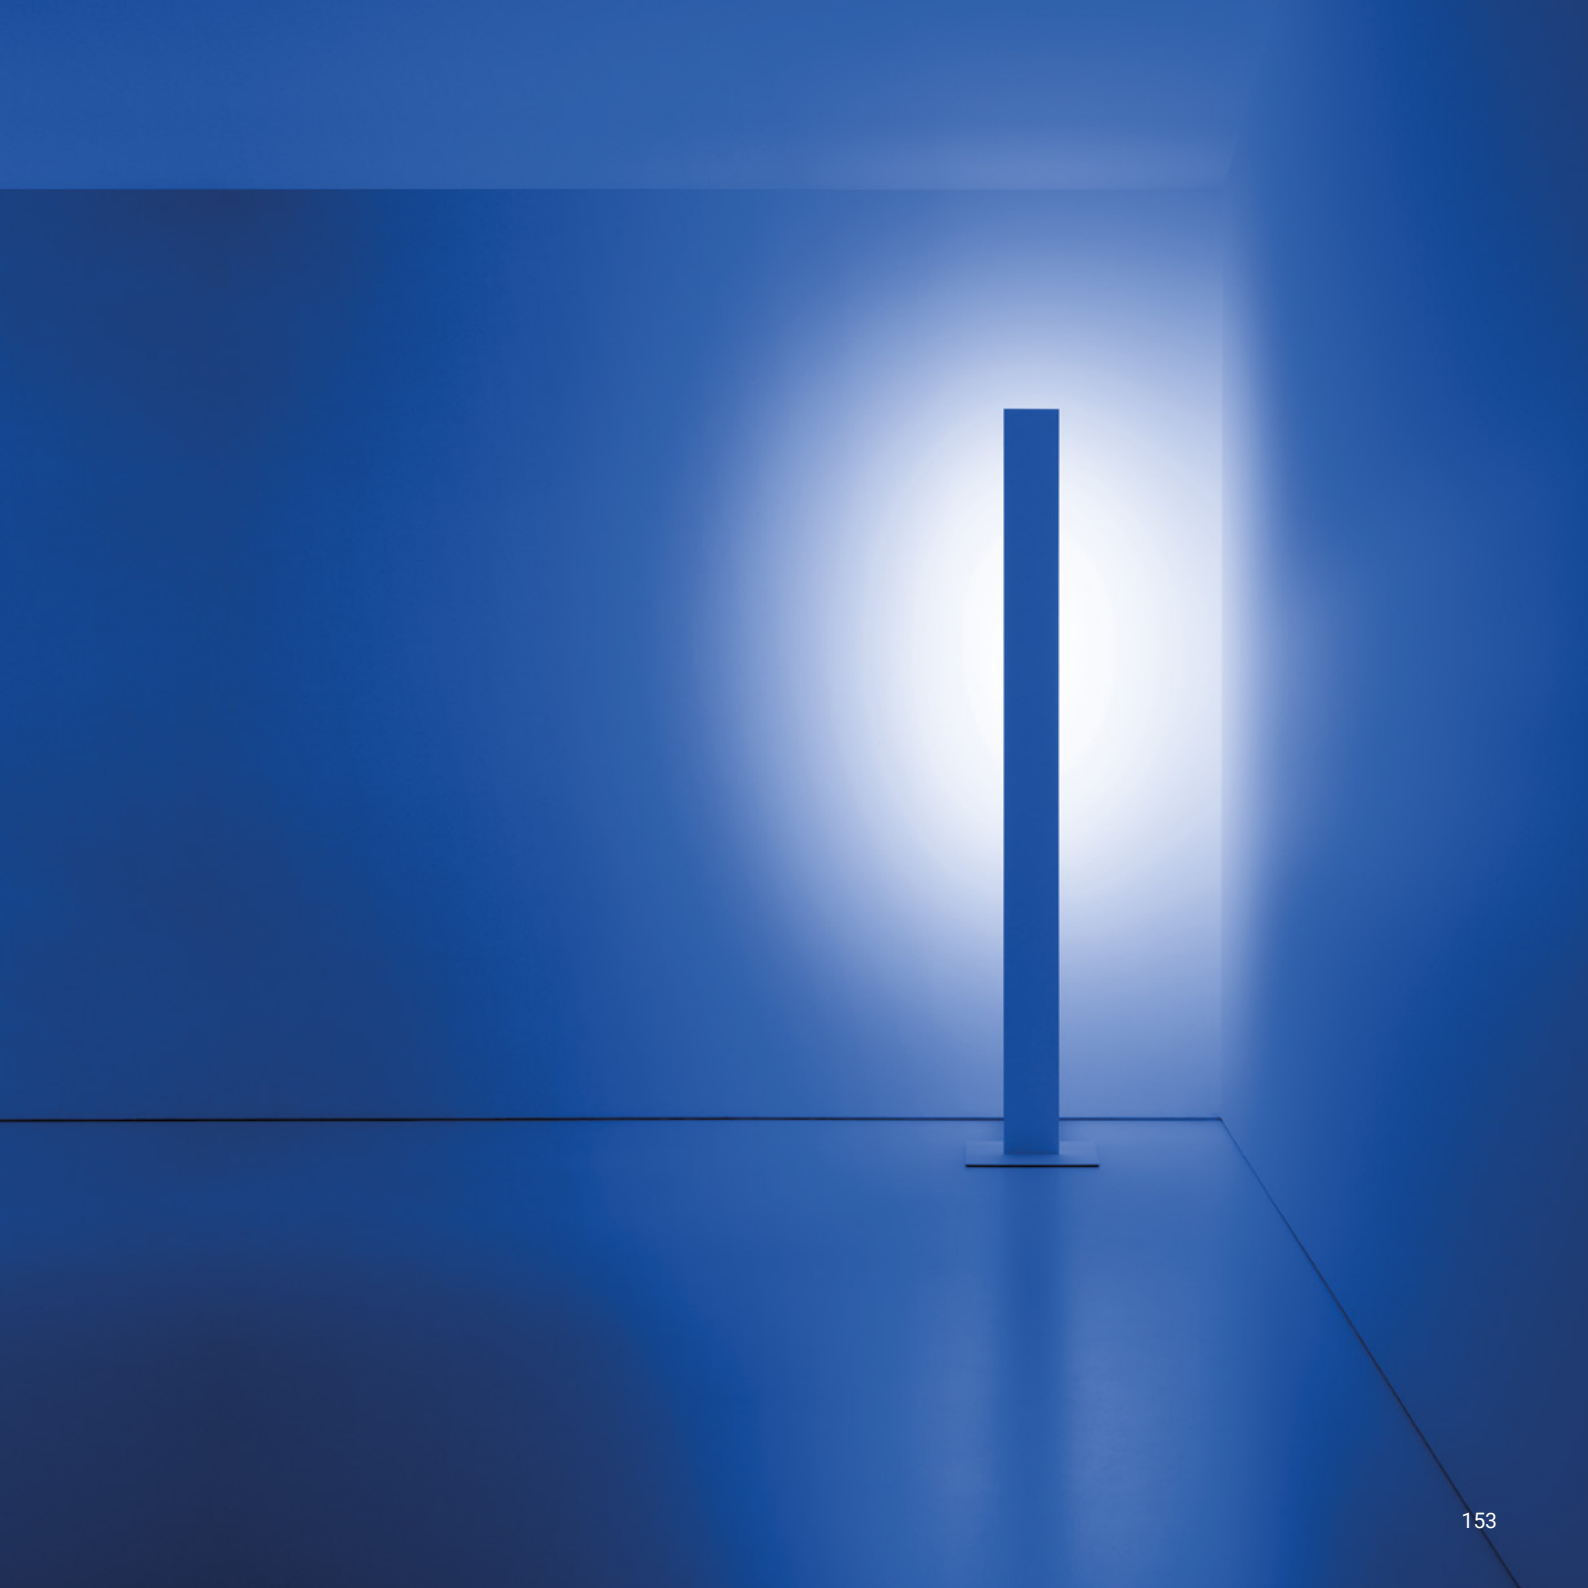






## ORIGINE

Davide Groppi - Giorgio Rava / 2020

From the Latin “origo”, start, birth, source.  
It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner.  
Mysterious and enigmatic, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light.  
Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.  
Available in 3 different heights and in an outdoor version.

**AZ Award 2021** and **People's Choice**  
**Archiproducts Design Award 2020**


Floor / Indirect / Indoor	
Material	Glass fiber - Metal
Finish	.04 Matt Black
Note	Floor luminaire. Dimmer on the cable. Black cable.

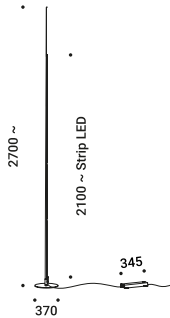

**ORIGINE 290**  
25W  
24V DC  
2700K - 1926lm / 3000K - 2075lm  
CRI >80  
Driver included  
Dimmer on board  
CE IP20

- Matt Black - 2700K - Dimmer on board
- Matt Black - 3000K - Dimmer on board


1A2300409.27.06  
1A2300409.30.06

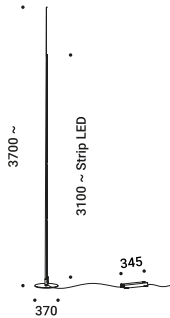

**ORIGINE 390**  
30W  
24V DC  
2700K - 2843lm / 3000K - 3063lm  
CRI >80  
Driver included  
Dimmer on board  
CE IP20

- Matt Black - 2700K - Dimmer on board
- Matt Black - 3000K - Dimmer on board

1A2310409.27.06  
1A2310409.30.06

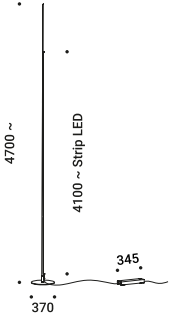


**ORIGINE 490**  
35W  
24V DC  
2700K - 3760lm / 3000K - 4051lm  
CRI >80  
Driver included  
Dimmer on board  
CE IP20

- Matt Black - 2700K - Dimmer on board
- Matt Black - 3000K - Dimmer on board

1A2320409.27.06  
1A2320409.30.06







## PABLO

Davide Groppi / 2015



The light is elevated to a work of art and contemplation.  
A luminous panel without a frame leans against the wall as if waiting to be hung.  
The colour and brightness can be controlled from the remote control.

PABLO

Floor / Diffuse / Indoor

Material

Metal - Methacrylate


Finish

.00 Standard

Note

Floor luminaire. Matt white diffuser. RGB wireless control. Transparent cable.

Davide Groppi / 2015



PABLO

66W

220-240V - 50/60Hz

Driver integrated


Dimmer on board

RGB wireless control

CE IP20

Standard - RGB - Dimmer on board

1A2730009.99.06

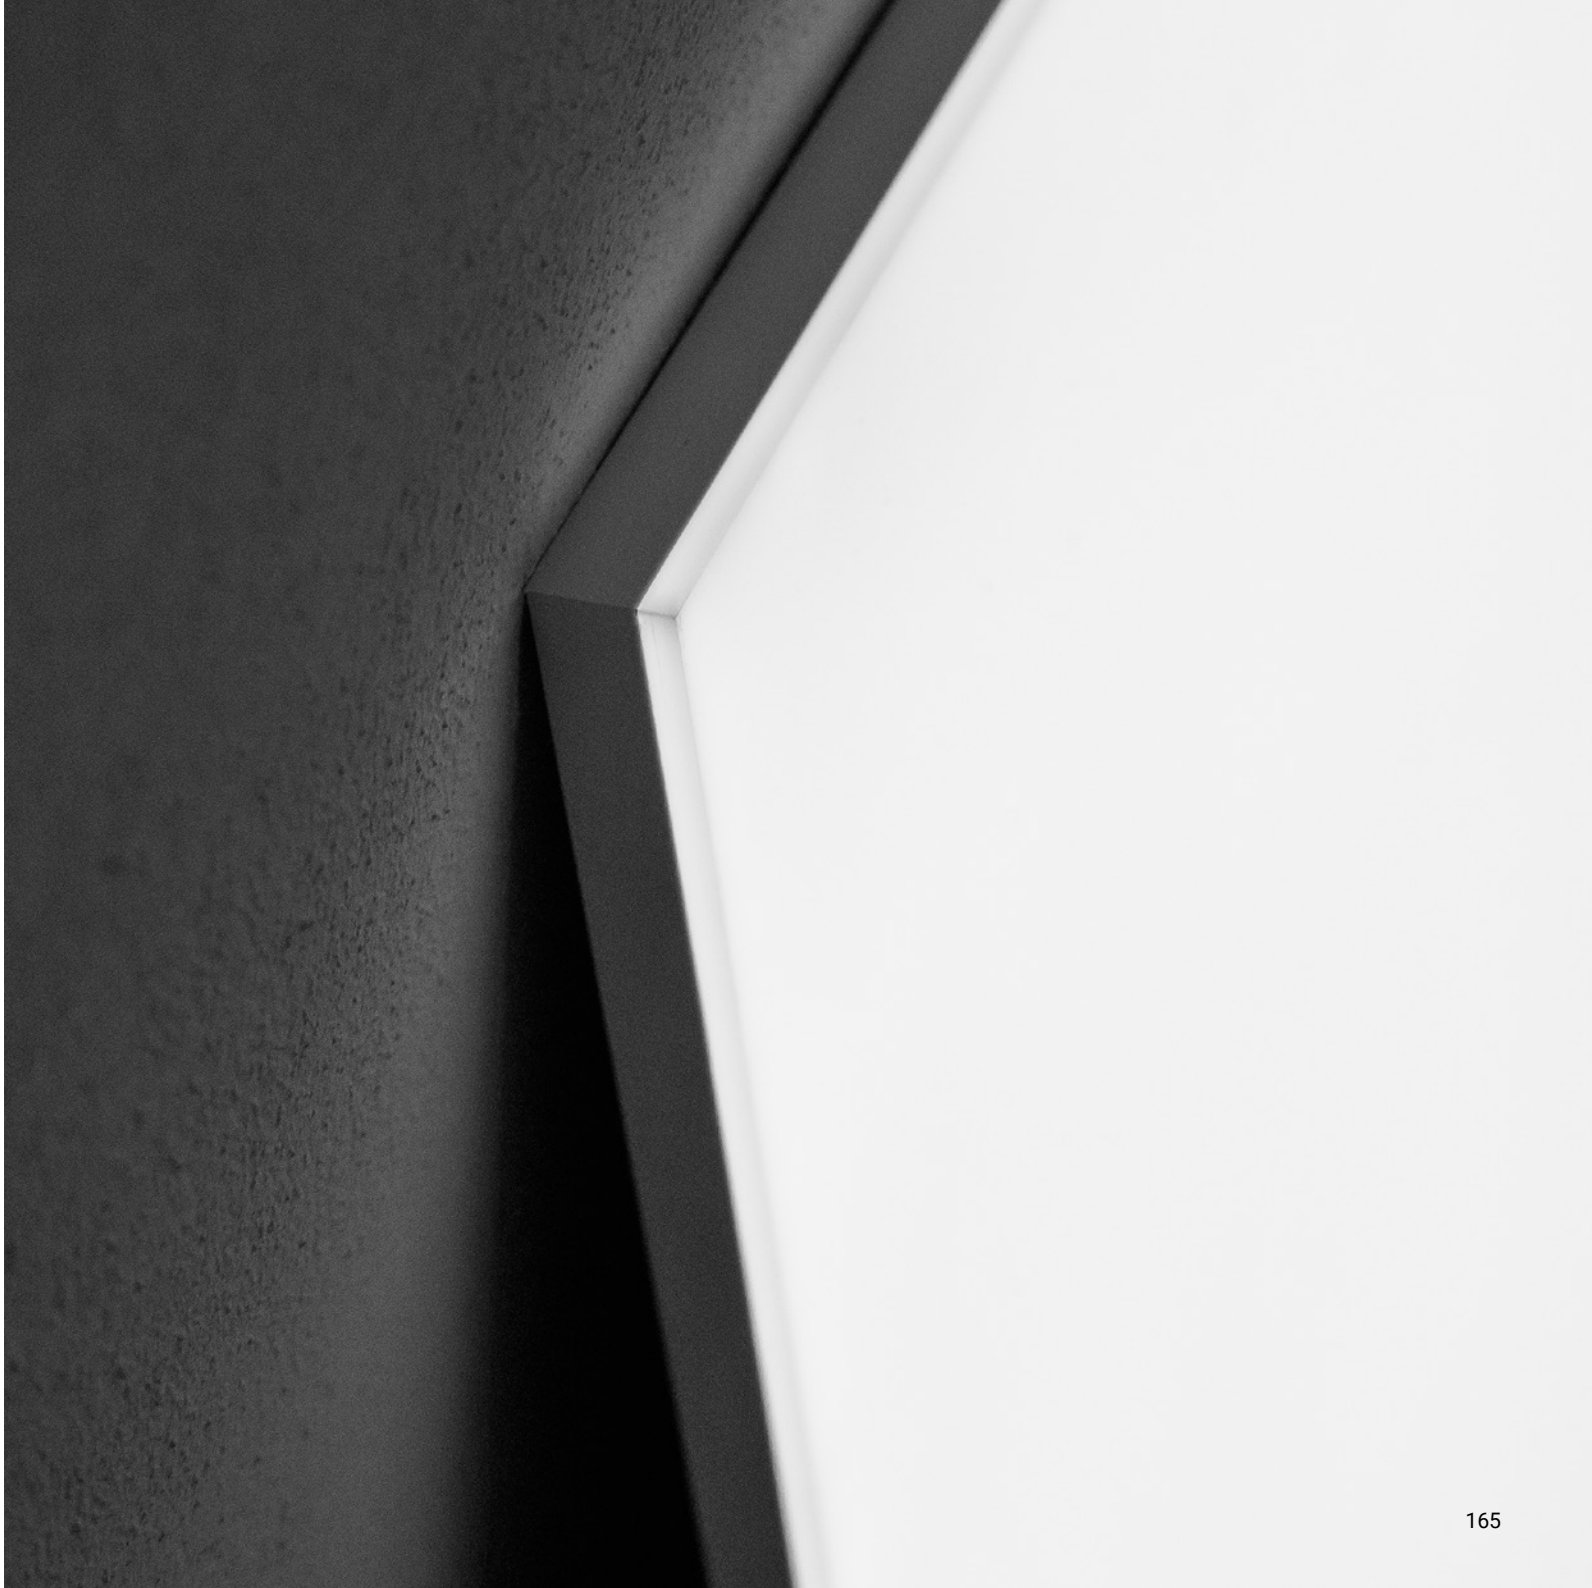








A piece of architecture to be used in space.  
A concrete cube that allows you to understand volumes  
and architecture in an unusual and unprecedented way.  
Outdoor version also available.



Q		Alberto Zattin / 2000
Floor / Direct / Indoor		
Material	Cement - Metal	
Finish	.00 Standard	
Note	Floor luminaire. Concrete body. Orange cable.	

	<b>Q</b> Max 10W - GU10 100-240V - 50/60Hz ON/OFF Bulb not included CE IP20	Standard - ON/OFF	1A2760009.00.00
---	--	-------------------	-----------------

Optional accessories

Bulbs



LED - GU10 - PAR16		Not included
220-240V - 4,9W - 120° 3000K - 550lm - CRI >80 Energy Efficiency E	1Y0330740	









A special project, an authentic ready-made.  
Obtained from a flexible fishing rod, it is a delicate and elegant sign,  
which brings to mind the subtle branches of a willow tree  
or bamboo canes floating on a light breeze.

Sampei is an unexpected gift, it is the magic of looking up,  
using light as a hook, and being amazed by so much weightlessness.

The light is the fisherman's line, catching faces, gazes, people.

Available in 4 different heights and also in an outdoor version.


**XXIII Compasso d'Oro ADI Award 2014**

**Elle Deco International Design Award 2011**

Compasso d'Oro ADI  
Award 2014




Floor / Direct / Indoor				
Material	Glass fiber - Metal			
Finish	.03 Matt White	.04 Matt Black	.20 Magic Blue	.37 Copper Brown
	.41 Umbra Grey			
Note	Floor luminaire. Adjustable in all directions. Dimmer on the cable. White cable for the matt white finish, black cable for the other finishes.			

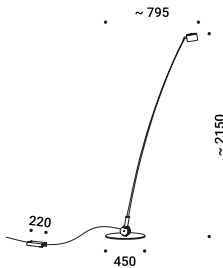

**SAMPEI 230**  
Max 21W  
220-240V - 50/60Hz  
2700K - 1795lm / 3000K - 1890lm  
CRI >90  
Driver integrated  
Dimmer on board  
C E IP20

Matt White - 2700K - Dimmer on board  
Matt White - 3000K - Dimmer on board  
Matt Black - 2700K - Dimmer on board  
Matt Black - 3000K - Dimmer on board  
Magic Blue - 2700K - Dimmer on board  
Magic Blue - 3000K - Dimmer on board  
Copper Brown - 2700K - Dimmer on board  
Copper Brown - 3000K - Dimmer on board  
Umbra Grey - 2700K - Dimmer on board  
Umbra Grey - 3000K - Dimmer on board


1A3730309.27.06  
1A3730309.30.06  
1A3730409.27.06  
1A3730409.30.06  
1A3732009.27.06  
1A3732009.30.06  
1A3733709.27.06  
1A3733709.30.06  
1A3734109.27.06  
1A3734109.30.06

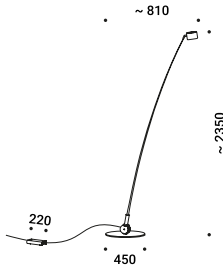

**SAMPEI 260**  
Max 21W  
220-240V - 50/60Hz  
2700K - 1795lm / 3000K - 1890lm  
CRI >90  
Driver integrated  
Dimmer on board  
C E IP20

Matt White - 2700K - Dimmer on board  
Matt White - 3000K - Dimmer on board  
Matt Black - 2700K - Dimmer on board  
Matt Black - 3000K - Dimmer on board  
Magic Blue - 2700K - Dimmer on board  
Magic Blue - 3000K - Dimmer on board  
Copper Brown - 2700K - Dimmer on board  
Copper Brown - 3000K - Dimmer on board  
Umbra Grey - 2700K - Dimmer on board  
Umbra Grey - 3000K - Dimmer on board


1A3740309.27.06  
1A3740309.30.06  
1A3740409.27.06  
1A3740409.30.06  
1A3742009.27.06  
1A3742009.30.06  
1A3743709.27.06  
1A3743709.30.06  
1A3744109.27.06  
1A3744109.30.06

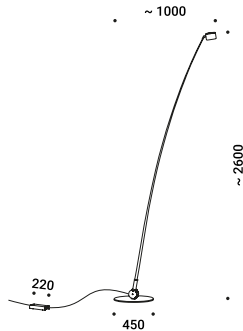

**SAMPEI 290**  
Max 21W  
220-240V - 50/60Hz  
2700K - 1795lm / 3000K - 1890lm  
CRI >90  
Driver integrated  
Dimmer on board  
C E IP20

Matt White - 2700K - Dimmer on board  
Matt White - 3000K - Dimmer on board  
Matt Black - 2700K - Dimmer on board  
Matt Black - 3000K - Dimmer on board  
Magic Blue - 2700K - Dimmer on board  
Magic Blue - 3000K - Dimmer on board  
Copper Brown - 2700K - Dimmer on board  
Copper Brown - 3000K - Dimmer on board  
Umbra Grey - 2700K - Dimmer on board  
Umbra Grey - 3000K - Dimmer on board

1A3750309.27.06  
1A3750309.30.06  
1A3750409.27.06  
1A3750409.30.06  
1A3752009.27.06  
1A3752009.30.06  
1A3753709.27.06  
1A3753709.30.06  
1A3754109.27.06  
1A3754109.30.06

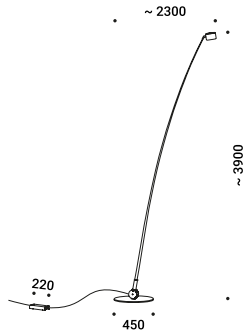

**SAMPEI 440**  
Max 21W  
220-240V - 50/60Hz  
2700K - 1859lm / 3000K - 1943lm  
CRI >90  
Driver integrated  
Dimmer on board  
C E IP20

Matt White - 2700K - Dimmer on board  
Matt White - 3000K - Dimmer on board  
Matt Black - 2700K - Dimmer on board  
Matt Black - 3000K - Dimmer on board  
Magic Blue - 2700K - Dimmer on board  
Magic Blue - 3000K - Dimmer on board  
Copper Brown - 2700K - Dimmer on board  
Copper Brown - 3000K - Dimmer on board  
Umbra Grey - 2700K - Dimmer on board  
Umbra Grey - 3000K - Dimmer on board

1A3760309.27.06  
1A3760309.30.06  
1A3760409.27.06  
1A3760409.30.06  
1A3762009.27.06  
1A3762009.30.06  
1A3763709.27.06  
1A3763709.30.06  
1A3764109.27.06  
1A3764109.30.06



Optional accessories

Other accessories



Accessory holder + Soft filter + Honeycomb louvre		Not included
Matt Black		1X0070400.04.00



Accessory holder + Elliptical filter		Not included
Matt Black		1X0070400.05.00



Blue filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



Red filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



Yellow filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00





Magic Blue



Copper Brown



Umbra Grey



## SHOJI

Davide Groppi - Paola Lenti / 2013



A nylon lampshade, strictly hand-stitched and hand-made.  
Outdoor version also available.



SHOJI

Davide Groppi - Paola Lenti / 2013

Floor / Diffuse / Indoor

Material


Metal - PBT - Polycarbonate

Finish

.00 Standard

Note

Floor luminaire. Hand-stitched shade. Matt black stems. Dimmer on the cable. Black cable.



SHOJI

Max 18W - E27

100-240V - 50/60Hz

Dimmer on board


Bulb not included

C E IP20

Standard - Dimmer on board

1A2780009.00.06

Optional accessories

<div>Bulbs</div> 	LED - E27		Not included
		220-240V - 13W - 200° 2700K - 1521lm - CRI >80 Energy Efficiency E	1Y0330650





## STOP

Davide Groppi / 2024

Technology has allowed us to rethink the classic floor lamp,  
seeking the essence of its function.

A base, a stem, a head, STOP.

A circle in space, an ideographic project in which idea becomes form and function.

The disc can be oriented, while the luminous flux is extremely generous.


**Archiproducts Design Award 2024**



STOP

Davide Groppi / 2024


Floor / Indirect / Indoor		
Material	Brass - Metal	
Finish	.01 Polished Chrome	.19 Polished Gold
Note	Floor luminaire. Adjustable Gravity Black matt black head. Matt black base. Dimmer on the cable. Black cable.	

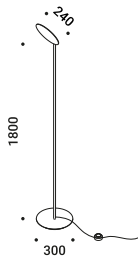

<b>STOP</b>		
28W		
24V DC		
2700K - 3335lm / 3000K - 3500lm		
CRI >90		
Driver with plug included		
Dimmer on board		
CE IP20		
Polished Chrome - 2700K - Dimmer on board		1A4760100.27.06
Polished Chrome - 3000K - Dimmer on board		1A4760100.30.06
Polished Gold - 2700K - Dimmer on board		1A4761900.27.06
Polished Gold - 3000K - Dimmer on board		1A4761900.30.06

Optional accessories

Drivers		
Driver with plug		Included
Matt Black	Input 110-240V - 50/60Hz	1Z0431300
	Output 24V DC - 36W - IP20	







Mies van der Rohe Pavilion  
Barcelona

**SUSPENSION**





## CATHODE


Omar Carraglia / 2015

A scientific looking bulb made from mouth blown glass.  
The shape brings to mind a light bulb that was never born.  
Think steampunk: situations in which instruments were inspired by  
the rudiments of electricity. The classic light bulb that has no future  
becomes a wonderful device made of luminous diodes.  
What would the past have looked like if the future had arrived first?  
Luminaire available also in ENDLESS version.

Suspension / Diffuse / Indoor

Material	Blown glass - Metal		
Finish	.03 Matt White	.08 Brushed Brass	.28 Polished Black Chrome

**Note** Suspension luminaire. Blown glass diffuser. Matt white rose and white cable for the matt white finish. Matt black rose and black cable for the other finishes. Single rose for more than one lamp on request. CATHODE 2: version with power cable only and without rose. CATHODE ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.



CATHODE 1

Ceiling driver version  
5,6W  
100-240V - 50/60Hz  
2700K - 264lm / 3000K - 284lm  
CRI >90  
Driver integrated  
ON/OFF

CE IP20

Matt White - 2700K - ON/OFF  
Matt White - 3000K - ON/OFF  
Brushed Brass - 2700K - ON/OFF  
Brushed Brass - 3000K - ON/OFF  
Polished Black Chrome - 2700K - ON/OFF  
Polished Black Chrome - 3000K - ON/OFF

1A2980300.27.00  
1A2980300.30.00  
1A2980800.27.00  
1A2980800.30.00  
1A2982800.27.00  
1A2982800.30.00




CATHODE 1

Ceiling driver version  
6W  
110-240V - 50/60Hz  
2700K - 264lm / 3000K - 284lm  
CRI >90  
Driver integrated  
DALI

CE IP20

Matt White - 2700K - DALI  
Matt White - 3000K - DALI  
Brushed Brass - 2700K - DALI  
Brushed Brass - 3000K - DALI  
Polished Black Chrome - 2700K - DALI  
Polished Black Chrome - 3000K - DALI

1A2980300.27.01  
1A2980300.30.01  
1A2980800.27.01  
1A2980800.30.01  
1A2982800.27.01  
1A2982800.30.01



CATHODE 1

Ceiling driver version  
6W  
110-240V - 50/60Hz  
2700K - 264lm / 3000K - 284lm  
CRI >90  
Driver integrated  
PUSH

CE IP20

Matt White - 2700K - PUSH  
Matt White - 3000K - PUSH  
Brushed Brass - 2700K - PUSH  
Brushed Brass - 3000K - PUSH  
Polished Black Chrome - 2700K - PUSH  
Polished Black Chrome - 3000K - PUSH

1A2980300.27.04  
1A2980300.30.04  
1A2980800.27.04  
1A2980800.30.04  
1A2982800.27.04  
1A2982800.30.04




CATHODE 1

Ceiling driver version  
6W  
110-240V - 50/60Hz  
2700K - 264lm / 3000K - 284lm  
CRI >90  
Driver integrated  
1-10V

CE IP20

Matt White - 2700K - 1-10V  
Matt White - 3000K - 1-10V  
Brushed Brass - 2700K - 1-10V  
Brushed Brass - 3000K - 1-10V  
Polished Black Chrome - 2700K - 1-10V  
Polished Black Chrome - 3000K - 1-10V

1A2980300.27.03  
1A2980300.30.03  
1A2980800.27.03  
1A2980800.30.03  
1A2982800.27.03  
1A2982800.30.03



CATHODE 1

Ceiling driver version  
6W  
110-240V - 50/60Hz  
2700K - 264lm / 3000K - 284lm  
CRI >90  
Driver integrated  
TRIAC/IGBT

CE IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT  
Brushed Brass - 2700K - TRIAC/IGBT  
Brushed Brass - 3000K - TRIAC/IGBT  
Polished Black Chrome - 2700K - TRIAC/IGBT  
Polished Black Chrome - 3000K - TRIAC/IGBT

1A2980300.27.02  
1A2980300.30.02  
1A2980800.27.02  
1A2980800.30.02  
1A2982800.27.02  
1A2982800.30.02




CATHODE 2

Remote driver version  
4W  
Max 350mA DC  
2700K - 264lm / 3000K - 284lm  
CRI >90  
Driver not included



Matt White - 2700K  
Matt White - 3000K  
Brushed Brass - 2700K  
Brushed Brass - 3000K  
Polished Black Chrome - 2700K  
Polished Black Chrome - 3000K

1A2980300.27.20  
1A2980300.30.20  
1A2980800.27.20  
1A2980800.30.20  
1A2982800.27.20  
1A2982800.30.20



CATHODE ENDLESS

ENDLESS version only  
6,3W - 0,16A  
48V DC  
2700K - 264lm / 3000K - 284lm  
CRI >90  
Driver not included  
See page ENDLESS






Matt White - 2700K  
Matt White - 3000K  
Brushed Brass - 2700K  
Brushed Brass - 3000K  
Polished Black Chrome - 2700K  
Polished Black Chrome - 3000K

1A2980300.27.40  
1A2980300.30.40  
1A2980800.27.40  
1A2980800.30.40  
1A2982800.27.40  
1A2982800.30.40





Compulsory accessories

Drivers



Optional accessories

Suspension kits



Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	CATHODE 2	1Z0241180.350	

Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	CATHODE 2	1Z0240870.350	

Driver				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	CATHODE 2	1Z0240850.350	

Decentralization kit				Not included
		CATHODE 1	1A0360000.00.00	

Kit ceiling rose and decentralizer				Not included
Matt White	White cable 3 m included	CATHODE 1	1A0770300.00.00	
Matt Black	Black cable 3 m included	CATHODE 1	1A0770400.00.00	


Recessed suspension kit for 12,5 mm plasterboard				Not included
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	CATHODE 2	1X0000300.06.00	
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	CATHODE 2	1X0000400.06.00	

Ceiling suspension kit				Not included
Matt White	For elettrical cables - 1 Piece	CATHODE 2	1X0010300.06.00	
Matt Black	For elettrical cables - 1 Piece	CATHODE 2	1X0010400.06.00	

Wall adapter plate				Not included
Matt White	For mounting on brick masonry walls	CATHODE 2	1X0050300.01.00	





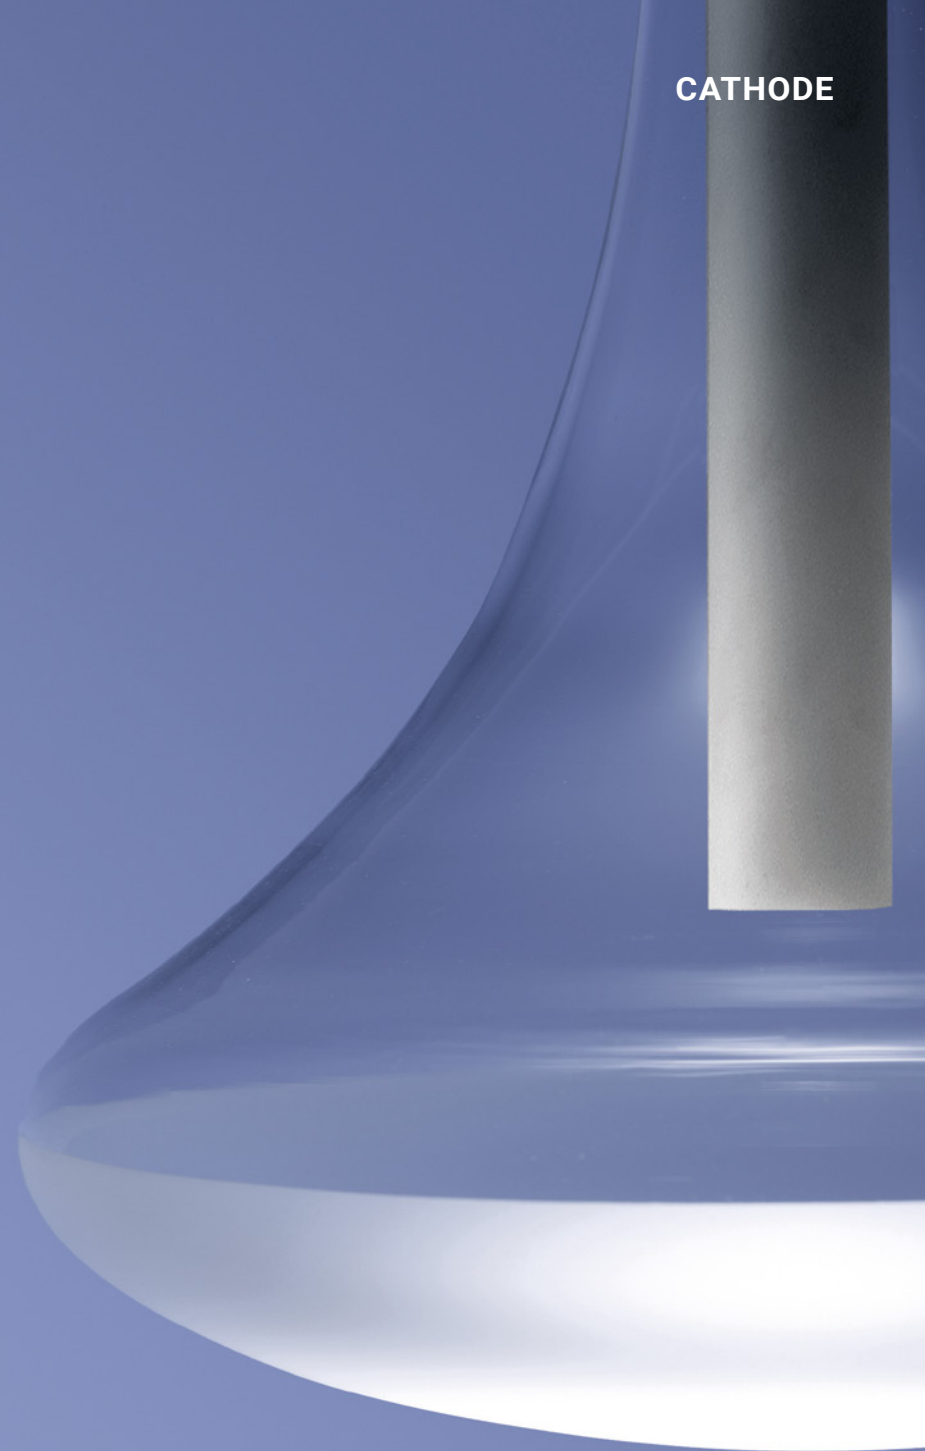

## FOSBURY

Davide Groppi / 2014



A lamp that interprets the classic theme of decentralization.  
An acrobatic and apparently precarious presence, bringing light where you prefer it,  
starting from a simple wall socket.  
**AZ Award 2016**



Suspension / Direct-Indirect / Indoor

MaterialMetal  
Finish.04 Matt Black

NoteSuspension luminaire with floor support. Matt white rose. AISI 304 stainless steel suspension cable. Dual emission. Indirect blue light. Transparent cable.



The diagram illustrates the Fosbury luminaire's dimensions and beam spread. It shows a vertical suspension cable with a length of 4000 units. The luminaire arm extends at a 2500 unit length, with a beam angle of 25 degrees. The luminaire head is shown with a beam angle of 30 degrees. The diagram also indicates a height of 2000 units for the luminaire head.

**FOSBURY**  
23W  
220-240V - 50/60Hz  
2700K - Down 765lm - Up 59lm /  
3000K - Down 823lm - Up 59lm  
CRI >90  
UGR <19  
Driver integrated  
ON/OFF  
CE IP20

Matt Black - 2700K - ON/OFF	1A2590409.27.00
Matt Black - 3000K - ON/OFF	1A2590409.30.00

Optional accessories

Suspension kits



Sloped ceiling suspension kit	Not included
Nickel plated - 1 Piece	1A0510000.00.00





**LED IS MORE**

Davide Groppi / 2011


A tribute to Mies van der Rohe and his Less is More.  
The project represents a light icon in a LED key,  
with a peculiar attention to energy savings and the quality of light.

Suspension / Diffuse / Indoor	
Material	Metal - Methacrylate
Finish	.03 Matt White
Note	Suspension luminaire. Sanded methacrylate diffuser. Matt white rose. White cable. Single rose for more than one lamp on request. LED IS MORE 2: version with power cable only and without rose.


	<b>LED IS MORE 1</b> Ceiling driver version 5,6W 100-240V - 50/60Hz 3000K - 354lm CRI >90 Driver integrated ON/OFF C E IP20	Matt White - 3000K - ON/OFF	1A2790300.30.00
	<b>LED IS MORE 2</b> Remote driver version 4W Max 350mA DC 3000K - 354lm CRI >90 Driver not included C E IP20	Matt White - 3000K	1A2790300.30.20

Compulsory accessories


Drivers



Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	LED IS MORE 2	1Z0241180.350	




Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	LED IS MORE 2	1Z0240870.350	



Driver				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	LED IS MORE 2	1Z0240850.350	

Optional accessories


Suspension kits




Decentralization kit				Not included
		LED IS MORE 1	1A0360000.00.00	




Kit ceiling rose and decentralizer				Not included
Matt White	White cable 3 m included	LED IS MORE 1	1A0770300.00.00	
Matt Black	Black cable 3 m included	LED IS MORE 1	1A0770400.00.00	



Recessed suspension kit for 12,5 mm plasterboard				Not included
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LED IS MORE 2	1X0000300.06.00	
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LED IS MORE 2	1X0000400.06.00	



Ceiling suspension kit				Not included
Matt White	For elettrical cables - 1 Piece	LED IS MORE 2	1X0010300.06.00	
Matt Black	For elettrical cables - 1 Piece	LED IS MORE 2	1X0010400.06.00	



Wall adapter plate				Not included
Matt White	For mounting on brick masonry walls	LED IS MORE 2	1X0050300.01.00	



## LOUIS XIV

Davide Groppi / 2023



Louis XIV is the freakiest letter of our light alphabet.  
It's a disobedient design that translates a certain rebellion  
to common lamp models into light.  
I wanted to investigate the idea of the chandelier: in line with our poetics,  
Louis XIV is the only possible solution for lightness and irony.  
Dimmable suspension lamp with dual emission.

LOUIS XIV

Davide Groppi / 2023

Suspension / Direct-Indirect / Indoor

Material

Glass - Metal

Finish

.19 Polished Gold

Note


Suspension luminaire. Seventy-five crystal drops and two birds. Natural brass branches. Structure with polished gold finish. Matt white rose. Dual emission and on/off. White cable. LOUIS XIV 2: version with power cable only and without rose.

Davide Groppi / 2023

LOUIS XIV

Compulsory accessories


Drivers



Driver		Not included
220-240V(110-127V)	250mA/13,5W(13,5W)/IP20/DALI - PUSH LOUIS XIV 2 - 1-10V	1Z0241270.250

Optional accessories

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard			Not included
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LOUIS XIV 2	1X0000300.05.00
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LOUIS XIV 2	1X0000400.05.00

216

217





# MAGIA

Michele Groppi / 2023



Light and transparency are the true stars of this project.  
We have always liked to think heretically, evoking mystery, magic and seduction.


Magia is a modular suspension lighting system for indirect light  
that can be adapted to suit different heights of the rooms.

In this case, the lens is not used to focus,  
but to modify the vision and perception of the object.


The effect of the convex lens conceals the part of the light beam  
and produces the lightest effect of suspension and inconsistency.  
Luminaire designed also to be powered by ENDLESS conductive tape.

**Archiproducts Design Award 2023**


Single installation  
with ceiling driver

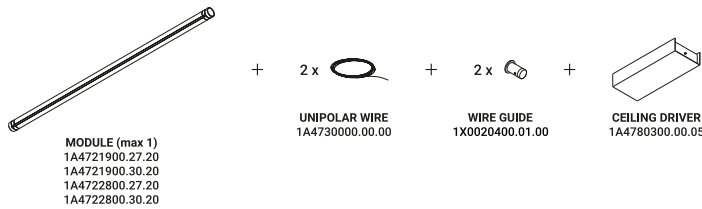


Multiple installation  
with ceiling driver

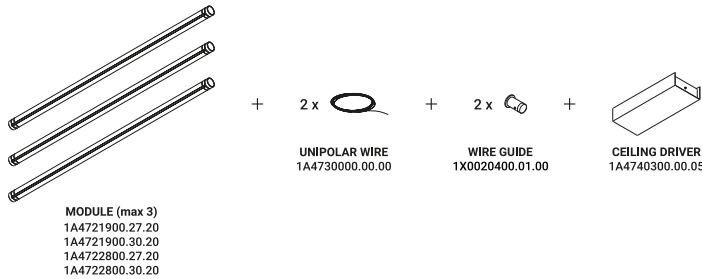

Single installation with  
recessed or ceiling  
suspension kit

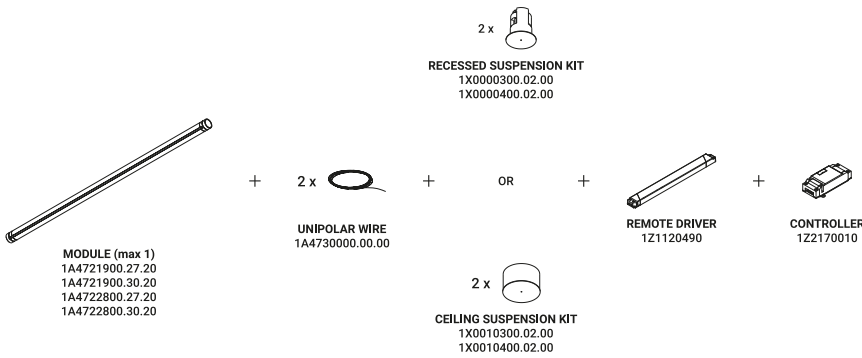

Multiple installation  
with recessed or ceiling  
suspension kit

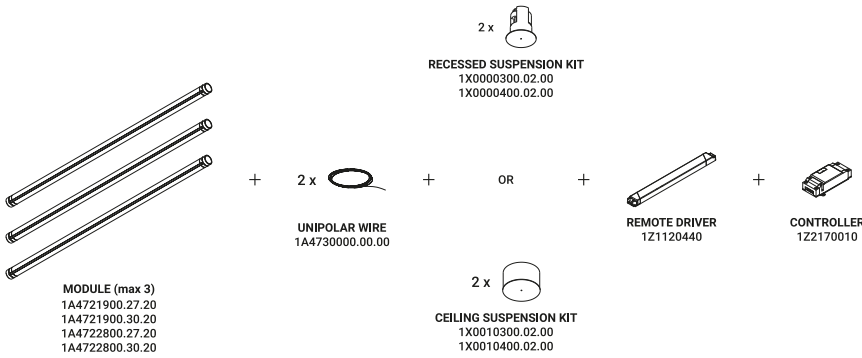

MAGIA


Michele Groppi / 2023

Suspension / Direct-Indirect / Indoor



Material	Metal - PMMA	
Finish	.19 Polished Gold	.28 Polished Black Chrome

Note



Modular suspension luminaire. Adjustable along the horizontal axis. Transparent bar with refractive effect. LED module profile with matt black finish. Details with polished gold or black chrome finish. Matt white rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

	<b>MAGIA - MODULE</b>		
	19W	Polished Gold - 2700K	1A4721900.27.20
	24V DC	Polished Gold - 3000K	1A4721900.30.20
	2700K - 1272lm / 3000K - 1312lm	Polished Black Chrome - 2700K	1A4722800.27.20
	CRI >90	Polished Black Chrome - 3000K	1A4722800.30.20
Driver not included			
			

Compulsory accessories

Installation kits			
	<b>Wire guide</b>		Not included
	Matt Black	1 Piece	1X0020400.01.00
	<b>Unipolar wire - 6 m</b>		Not included
	1 Piece - Max 60V DC	Max 3 modules	1A4730000.00.00

Suspension kits







	<b>Recessed suspension kit for 12,5 mm plasterboard</b>			Not included
	Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.02.00	
	Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.02.00	
	<b>Ceiling suspension kit</b>			Not included
Matt White	For elettrical cables - 1 Piece	1X0010300.02.00		
Matt Black	For elettrical cables - 1 Piece	1X0010400.02.00		

Michele Groppi / 2023

MAGIA

Compulsory accessories


Drivers



<b>Ceiling driver</b>				Not included
Matt White	Input 220-240V - 50/60Hz Output 24V - 21W - IP20 DALI - PUSH - 1-10V - TRIAC	Max 1 module	1A4780300.00.05	
<b>Ceiling driver</b>				Not included
Matt White	Input 110-240V - 50/60Hz Output 24V - 60W - IP20 DALI - PUSH - 1-10V - TRIAC	Max 3 modules	1A4740300.00.05	
<b>Driver</b>				Not included
100-240V	24V/50W/IP20/ON/OFF	Max 1 module	1Z1120490	
<b>Driver</b>				Not included
100-240V	24V/80W/IP20/ON/OFF	Max 3 modules	1Z1120440	
<b>Driver</b>				Not included
100-240V	24V/150W/IP67/1-10V	Max 6 modules	1Z1120500	
<b>Controller</b>				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010	


Optional accessories


Suspension kits




<b>Wall adapter plate</b>				Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00	



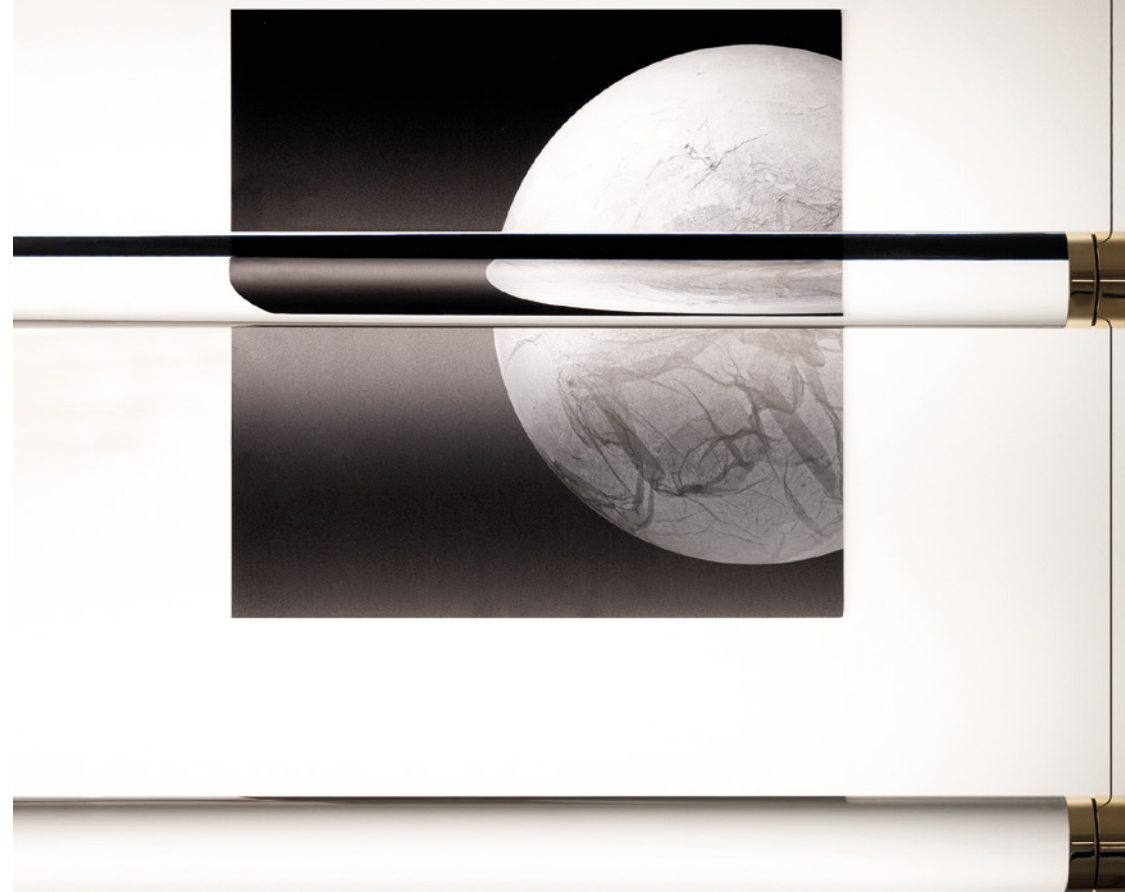


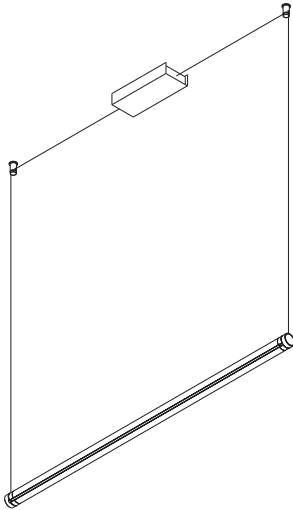


Example of single installation with ceiling driver

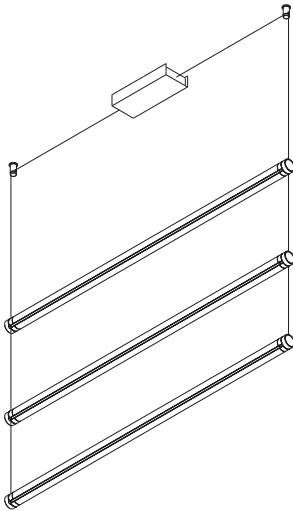


Example of multiple installation with ceiling driver

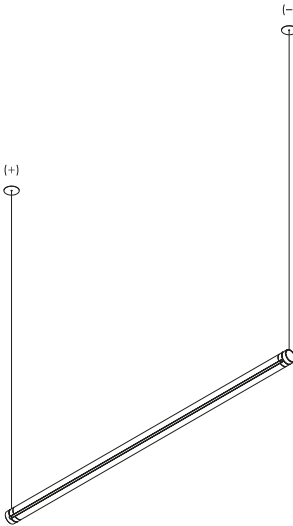


Example of single installation with recessed suspension kit

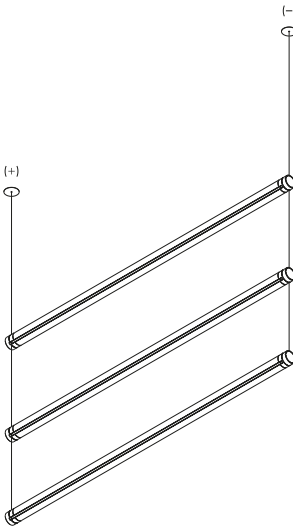


Example of multiple installation with recessed suspension kit

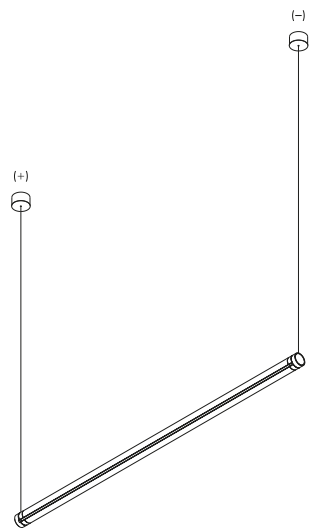

Example of single installation with ceiling suspension kit

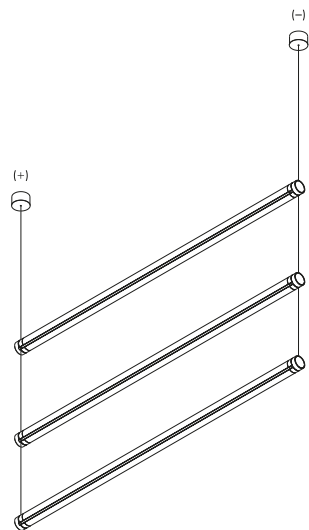


Example of multiple installation with ceiling suspension kit

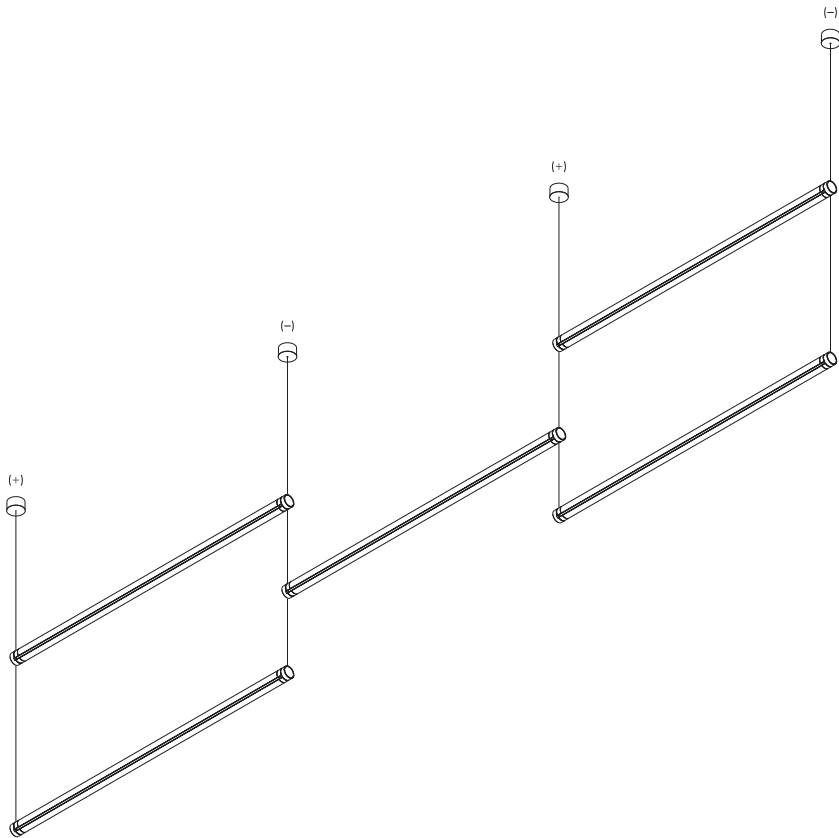

Example of multiple installation | Max 3 modules for cable





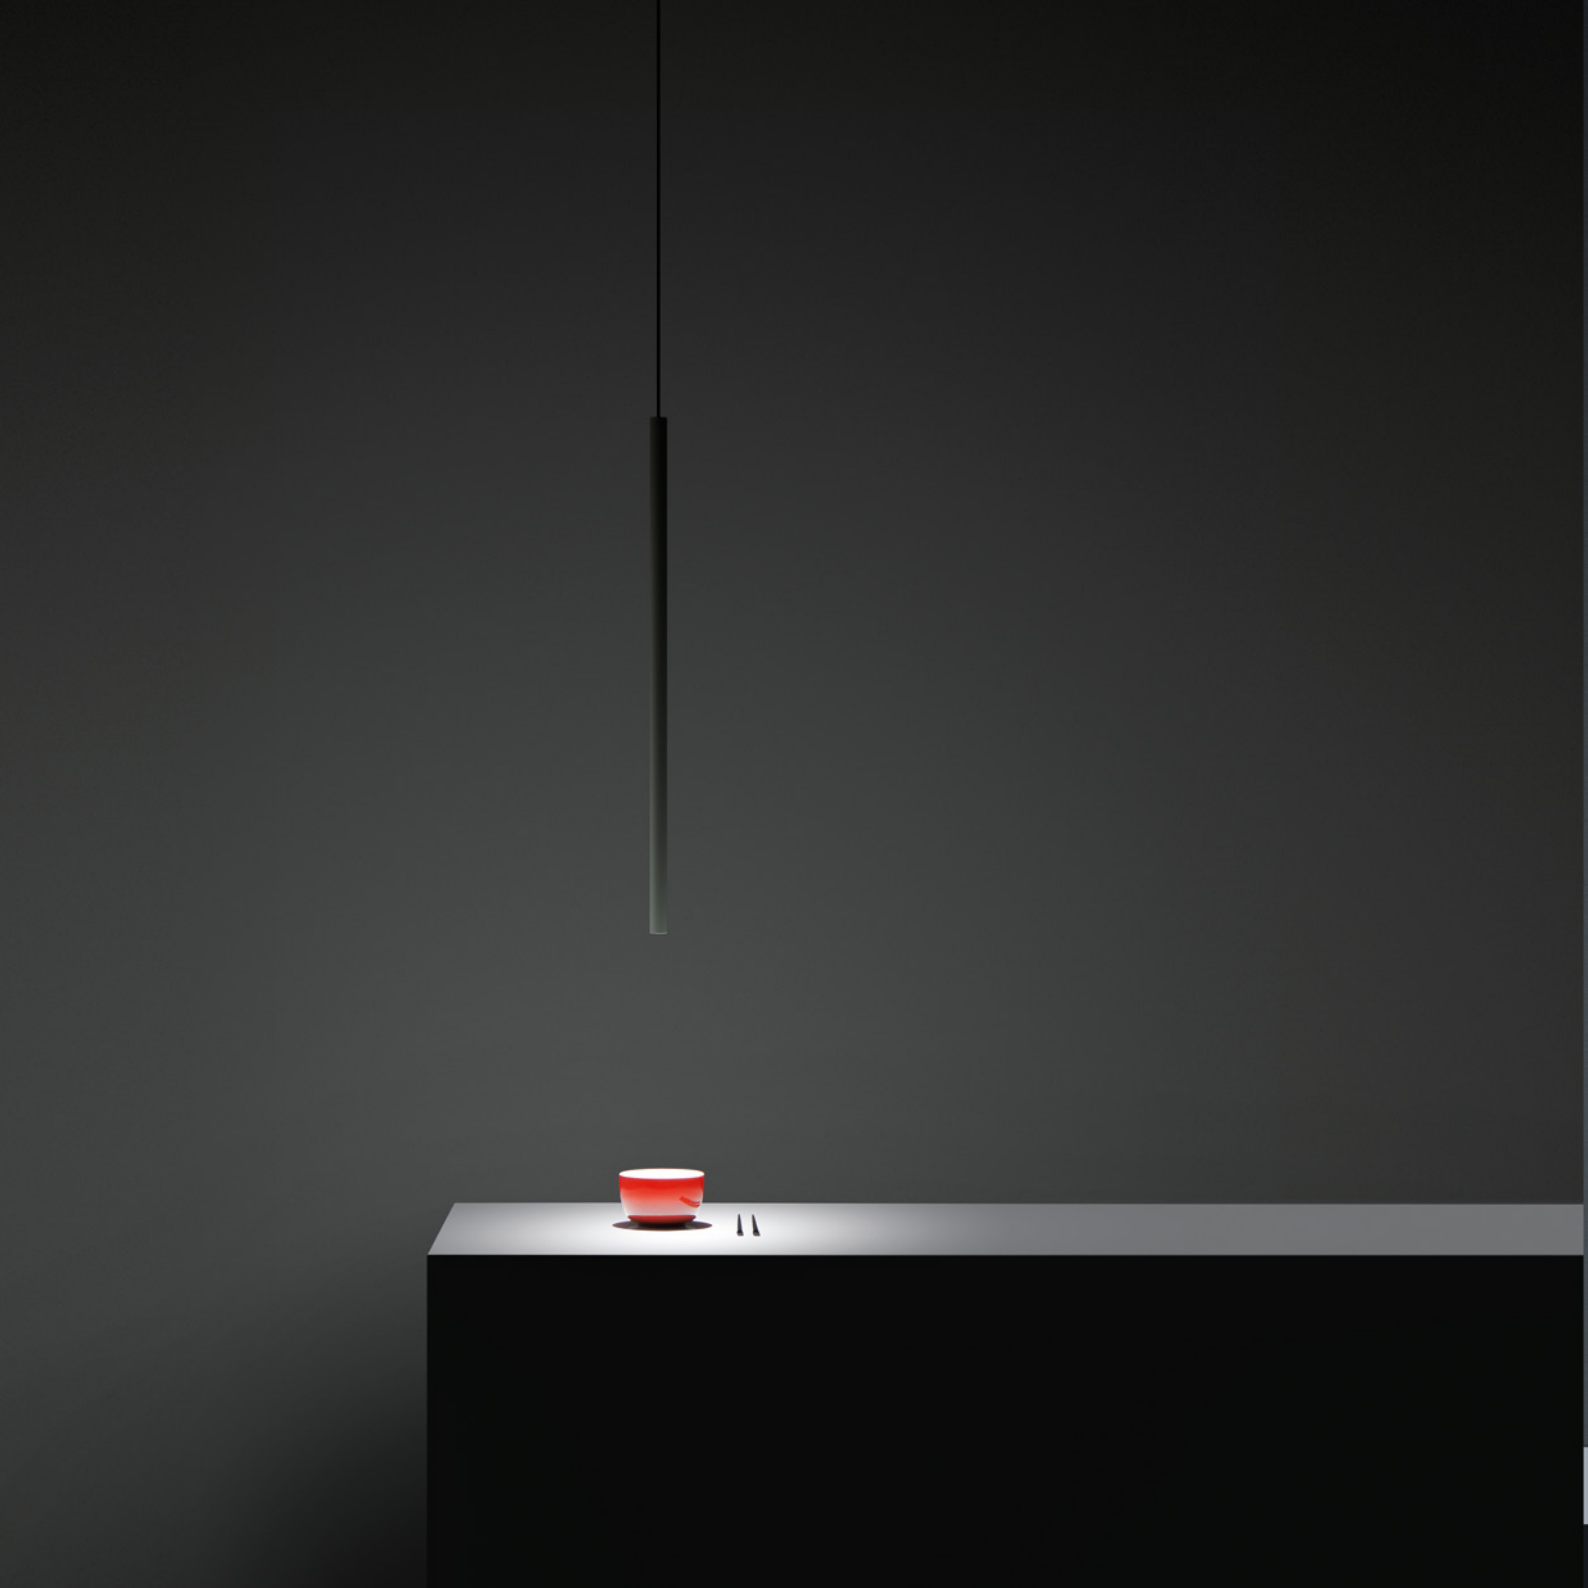

# MISS

Omar Carraglia / 2006

So slim and essential...

The fundamental concept of this project is minimalism.

A small tube that lights the table with wonder.

A real dual project: sign and light.

Luminaire available also in ENDLESS version.

Suspension / Direct / Indoor

Material	Metal			
Finish	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.08</b> Brushed Brass	<b>.26</b> Total Black
	<b>.28</b> Polished Black Chrome			
Note	Suspension luminaire. Matt white rose and white cable for the matt white and matt black finish. Matt black rose and black cable for the other finishes. Single rose for more than one lamp on request. MISS 2: version with power cable only and without rose. MISS ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.			



MISS 1

Ceiling driver version  
5,6W  
100-240V - 50/60Hz  
2700K - 290lm / 3000K - 310lm  
CRI >90  
Driver integrated  
ON/OFF

CE IP20

Matt White - 2700K - ON/OFF	1A2960300.27.00
Matt White - 3000K - ON/OFF	1A2960300.30.00
Matt Black - 2700K - ON/OFF	1A2960400.27.00
Matt Black - 3000K - ON/OFF	1A2960400.30.00
Brushed Brass - 2700K - ON/OFF	1A2960800.27.00
Brushed Brass - 3000K - ON/OFF	1A2960800.30.00
Total Black - 2700K - ON/OFF	1A2962600.27.00
Total Black - 3000K - ON/OFF	1A2962600.30.00
Polished Black Chrome - 2700K - ON/OFF	1A2962800.27.00
Polished Black Chrome - 3000K - ON/OFF	1A2962800.30.00




MISS 1

Ceiling driver version  
6W  
110-240V - 50/60Hz  
2700K - 290lm / 3000K - 310lm  
CRI >90  
Driver integrated  
DALI

CE IP20

Matt White - 2700K - DALI	1A2960300.27.01
Matt White - 3000K - DALI	1A2960300.30.01
Matt Black - 2700K - DALI	1A2960400.27.01
Matt Black - 3000K - DALI	1A2960400.30.01
Brushed Brass - 2700K - DALI	1A2960800.27.01
Brushed Brass - 3000K - DALI	1A2960800.30.01
Total Black - 2700K - DALI	1A2962600.27.01
Total Black - 3000K - DALI	1A2962600.30.01
Polished Black Chrome - 2700K - DALI	1A2962800.27.01
Polished Black Chrome - 3000K - DALI	1A2962800.30.01




MISS 1

Ceiling driver version  
6W  
110-240V - 50/60Hz  
2700K - 290lm / 3000K - 310lm  
CRI >90  
Driver integrated  
PUSH

CE IP20

Matt White - 2700K - PUSH	1A2960300.27.04
Matt White - 3000K - PUSH	1A2960300.30.04
Matt Black - 2700K - PUSH	1A2960400.27.04
Matt Black - 3000K - PUSH	1A2960400.30.04
Brushed Brass - 2700K - PUSH	1A2960800.27.04
Brushed Brass - 3000K - PUSH	1A2960800.30.04
Total Black - 2700K - PUSH	1A2962600.27.04
Total Black - 3000K - PUSH	1A2962600.30.04
Polished Black Chrome - 2700K - PUSH	1A2962800.27.04
Polished Black Chrome - 3000K - PUSH	1A2962800.30.04




MISS 1

Ceiling driver version  
6W  
110-240V - 50/60Hz  
2700K - 290lm / 3000K - 310lm  
CRI >90  
Driver integrated  
1-10V

CE IP20

Matt White - 2700K - 1-10V	1A2960300.27.03
Matt White - 3000K - 1-10V	1A2960300.30.03
Matt Black - 2700K - 1-10V	1A2960400.27.03
Matt Black - 3000K - 1-10V	1A2960400.30.03
Brushed Brass - 2700K - 1-10V	1A2960800.27.03
Brushed Brass - 3000K - 1-10V	1A2960800.30.03
Total Black - 2700K - 1-10V	1A2962600.27.03
Total Black - 3000K - 1-10V	1A2962600.30.03
Polished Black Chrome - 2700K - 1-10V	1A2962800.27.03
Polished Black Chrome - 3000K - 1-10V	1A2962800.30.03



MISS 1

Ceiling driver version  
6W  
110-240V - 50/60Hz  
2700K - 290lm / 3000K - 310lm  
CRI >90  
Driver integrated  
TRIAC/IGBT

CE IP20

Matt White - 2700K - TRIAC/IGBT	1A2960300.27.02
Matt White - 3000K - TRIAC/IGBT	1A2960300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A2960400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A2960400.30.02
Brushed Brass - 2700K - TRIAC/IGBT	1A2960800.27.02
Brushed Brass - 3000K - TRIAC/IGBT	1A2960800.30.02
Total Black - 2700K - TRIAC/IGBT	1A2962600.27.02
Total Black - 3000K - TRIAC/IGBT	1A2962600.30.02
Polished Black Chrome - 2700K - TRIAC/IGBT	1A2962800.27.02
Polished Black Chrome - 3000K - TRIAC/IGBT	1A2962800.30.02






MISS 2

Remote driver version  
4W  
Max 350mA DC  
2700K - 290lm / 3000K - 310lm  
CRI >90  
Driver not included



Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K  
Brushed Brass - 2700K  
Brushed Brass - 3000K  
Total Black - 2700K  
Total Black - 3000K  
Polished Black Chrome - 2700K  
Polished Black Chrome - 3000K

1A2960300.27.20  
1A2960300.30.20  
1A2960400.27.20  
1A2960400.30.20  
1A2960800.27.20  
1A2960800.30.20  
1A2962600.27.20  
1A2962600.30.20  
1A2962800.27.20  
1A2962800.30.20



MISS ENDLESS

Endless version only  
6,3W - 0,16A  
48V DC  
2700K - 290lm / 3000K - 310lm  
CRI >90  
Driver not included  
See page ENDLESS






Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K  
Brushed Brass - 2700K  
Brushed Brass - 3000K  
Total Black - 2700K  
Total Black - 3000K  
Polished Black Chrome - 2700K  
Polished Black Chrome - 3000K

1A2960300.27.40  
1A2960300.30.40  
1A2960400.27.40  
1A2960400.30.40  
1A2960800.27.40  
1A2960800.30.40  
1A2962600.27.40  
1A2962600.30.40  
1A2962800.27.40  
1A2962800.30.40





Compulsory accessories

Drivers



Optional accessories

Suspension kits



Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	MISS 2	1Z0241180.350	

Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	MISS 2	1Z0240870.350	

Driver				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	MISS 2	1Z0240850.350	

Decentralization kit			Not included
	MISS 1	1A0360000.00.00	

Kit ceiling rose and decentralizer				Not included
Matt White	White cable 3 m included	MISS 1	1A0770300.00.00	
Matt Black	Black cable 3 m included	MISS 1	1A0770400.00.00	

Recessed suspension kit for 12,5 mm plasterboard				Not included
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	MISS 2	1X0000300.06.00	
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	MISS 2	1X0000400.06.00	

Ceiling suspension kit				Not included
Matt White	For elettrical cables - 1 Piece	MISS 2	1X0010300.06.00	
Matt Black	For elettrical cables - 1 Piece	MISS 2	1X0010400.06.00	

Wall adapter plate				Not included
Matt White	For mounting on brick masonry walls	MISS 2	1X0050300.01.00	



• 25 mm •

MISS







## MOON

Davide Groppi / 2005



Moon was created from the dream of bringing the moon inside your own home.  
The handmade Japanese paper surface makes every lamp unique.  
Table and floor versions available.

Suspension / Diffuse / Indoor	
Material	Japanese paper - PE
Finish	.00 Standard
Note	
	Suspension luminaire. PE and Japanese paper shade. Matt white rose. AISI 304 stainless steel suspension cable. White cable. MOON 60 DE: version with dual emission and on/off. Transparent cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate specifically compulsory for MOON 120 model. A deliberate feature of MOON design is the creased, glued and overlapping effect of the paper. The used material is sensitive to humidity. This product is not suitable for use in high humidity environments.



MOON 60

Max 15W - E27  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included

CE IP20

Standard - ON/OFF

1A2820000.00.00




MOON 60 DE

Dual emission  
Max 15W - E27 + Max 10W - GU10  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included

CE IP20

Standard - ON/OFF

1A2830000.00.00

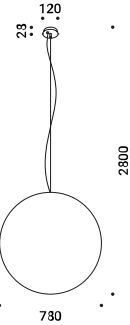


MOON 80

Max 15W - E27  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included

CE IP20

Standard - ON/OFF

1A2840000.00.00

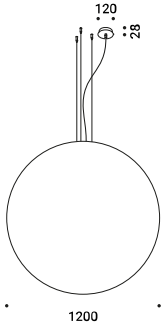


MOON 120

Max 2x25W - E27  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included

CE IP20

Standard - ON/OFF

1A2850000.00.00

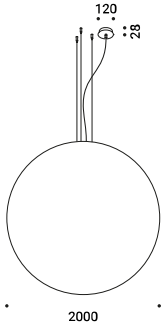

MOON 200

Max 4x25W - E27  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
Moisture barrier bag included  
Wooden crate included  
Transport excluded

CE IP20

Standard - ON/OFF

1A2860000.00.00

Optional accessories

## Bulbs

### LED - GU10 - PAR16

Not included

220-240V - 5,5W - 25°  
2700K - 355lm - CRI >97  
Energy Efficiency G - Dimmable

MOON 60 DE

1Y0330770

### LED - E27 - A60

Not included

220-240V - 11,2W - 360°  
2700K - 1521lm - CRI >90  
Energy Efficiency D - Dimmable

MOON 60 / MOON 60 DE /  
MOON 80 / MOON 200

1Y0330790

### LED - E27 - A150

Not included

220-240V - 20W - 200°  
2700K - 2452lm - CRI >80  
Energy Efficiency E - Dimmable

MOON 120

1Y2160020

## Suspension kits

### Sloped rose suspension kit

Not included

Nickel plated - 1 Piece

MOON 60 / MOON 60 DE / 1A0520000.00.00  
MOON 80

### Sloped ceiling suspension kit

Not included

Nickel plated - 1 Piece

MOON 120

1A0510000.00.00

### Decentralization kit

Not included

1A0360000.00.00

### Kit ceiling rose and decentralizer

Not included

Matt White      White cable 3 m included

1A0770300.00.00

Matt Black      Black cable 3 m included

1A0770400.00.00

Optional accessories

Other accessories				
Moisture barrier bag				Not included
	Packaging for air and sea shipping	MOON 60 / MOON 60 DE	4A2820010	
Moisture barrier bag				Not included
	Packaging for air and sea shipping	MOON 80	4A2840010	
Wooden crate				Not included
	Packaging for air and sea shipping	MOON 120	49860010	
Moisture barrier bag				Not included
	Packaging for air and sea shipping	MOON 120	49860020	








MOON







MOON

Private Residence  
Piacenza



## NEURO

Davide Groppi - Beppe Merlano / 2013

The idea is to bring light wherever you like, starting from a socket.

A simple project, almost a revival of the old electrical wiring.

A plug, a cable, some isolators, a socket and a LED.

Outdoor version also available.


**Design Plus Award 2014**



Suspension / Direct / Indoor

Material	Metal		
Finish	.03 Matt White	.04	Matt Black




**Note** Suspension luminaire. Five cable clamps included. Matt white cable clamps and white cable for the matt white finish. Matt black cable clamps and black cable for the matt black finish.

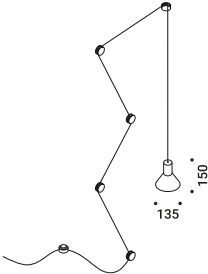

**NEURO**  
Max 15W - E27  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
CE IP20


Matt White - ON/OFF	1A0160309.00.00
Matt Black - ON/OFF	1A0160409.00.00

Optional accessories

Installation kits		
	Wall and ceiling rose	Not included
	Matt White	1X0030300.01.00
	Matt Black	1X0030400.01.00
	Cable clamp	Included
	Matt White 1 Piece	1X0110300.02.00
	Matt Black 1 Piece	1X0110400.02.00
Bulbs		
	LED - E27 - PAR30s	Not included
	220-240V - 9,5W - 25°	1Y0330730
	3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	





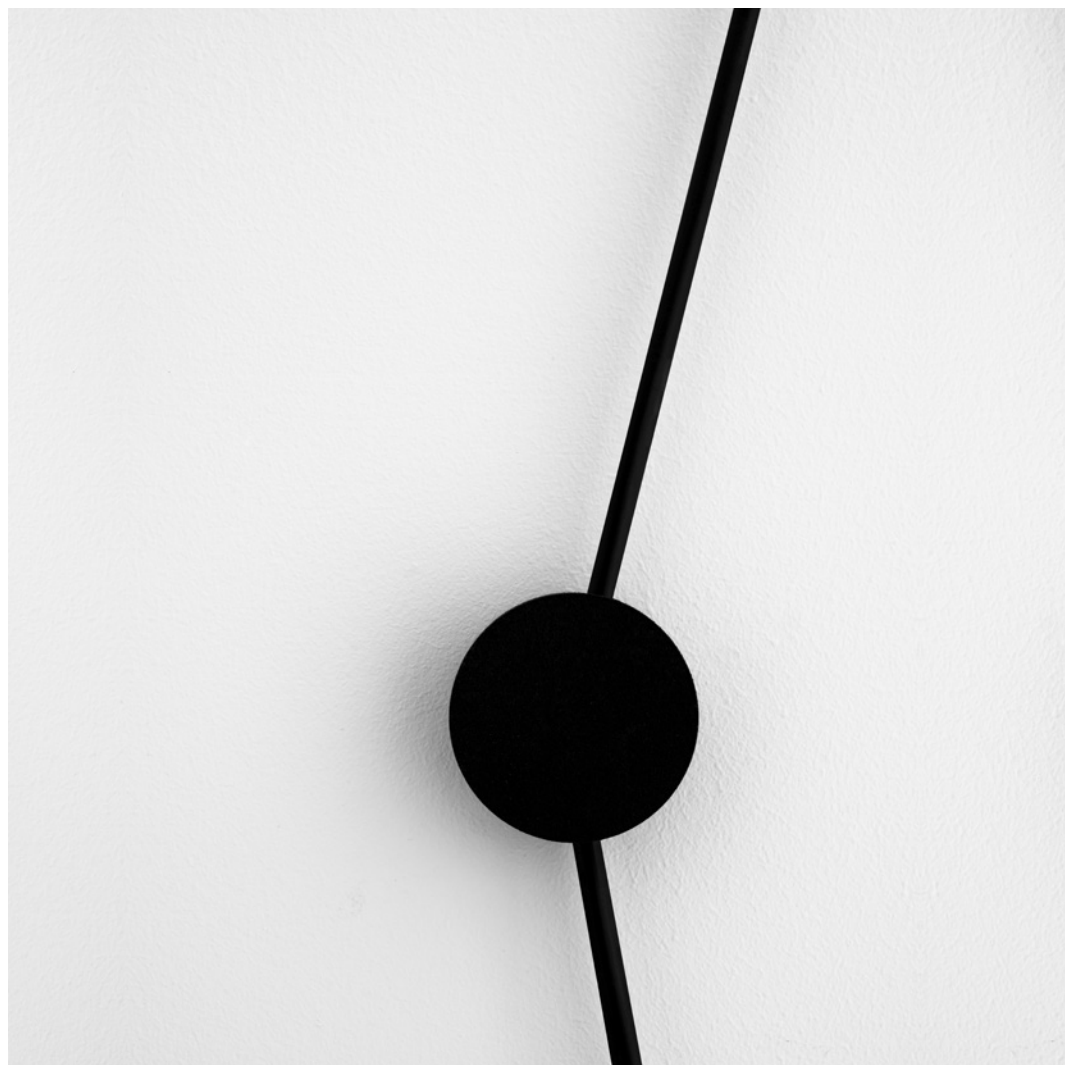

Santa Clara 1728 Hotel  
Lisbon





The light in the plate is the most beautiful light.  
Light as an ingredient, used courteously but at the same time decisively.

**ovo**

Massimiliano Alajmo - Raffaele Alajmo / 2010

Suspension / Direct / Indoor

Material	Metal
Finish	.03 Matt White

**Note** Suspension luminaire. Matt white rose. White cable.



**OVO**

Max 20W - GU4 - 12V

230-240V - 50/60Hz

ON/OFF

Bulb not included

CE IP20   0.5 m 

Matt White - ON/OFF

1A2890300.00.00

## Optional accessories

## Bulbs



**LED - GU4 - MR11**

Not included

12V - 4W - 24°  
2700K - 200lm - CRI >80  
Energy Efficiency G

1Y0330450





## OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010

The light in the plate is the most beautiful light.  
Light as an ingredient, used courteously but at the same time decisively.


OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010

Suspension / Direct / Indoor

Material Metal  
Finish .03 Matt White

Note Suspension luminaire. Matt white rose. White cable.

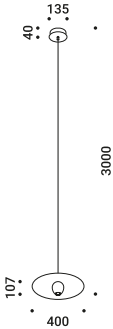

OVONELPIATTO

Max 20W - GU4 - 12V  
230-240V - 50/60Hz  
ON/OFF

Bulb not included

CE IP20 0,5 m

Matt White - ON/OFF

1A2880300.00.00

Optional accessories

Bulbs



LED - GU4 - MR11

Not included

12V - 4W - 24°  
2700K - 200lm - CRI >80  
Energy Efficiency G

1Y0330450







## REFLEX S


Michele Groppi / 2023

A powerful LED and a subtle mirror.  
A magic and almost invisible lighting solution,  
which provides an indirect light that multiplies spaces  
and gives the eye unprecedented perspectives, unexpected depths, illusions of light.  
Wall version also available.  
Luminaire designed also to be powered by ENDLESS conductive tape.

Suspension / Indirect / Indoor

Material Metal - Mirror  
Finish .04 Matt Black

Note Suspension luminaire. Plane with mirror finish. Matt black rear plane. Matt white rose. AISI 304 stainless steel suspension cables. Black cable. REFLEX S 2: version with power cable only and without rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

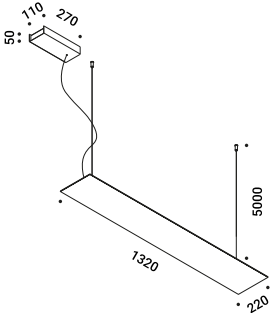


REFLEX S 1

Ceiling driver version  
56W  
220-240V - 50/60Hz  
2700K - 6136lm / 3000K - 6326lm  
CRI >90  
Driver integrated  
TRIAC/IGBT

CE IP20

Matt Black - 2700K - TRIAC/IGBT  
Matt Black - 3000K - TRIAC/IGBT

1A4790400.27.02  
1A4790400.30.02

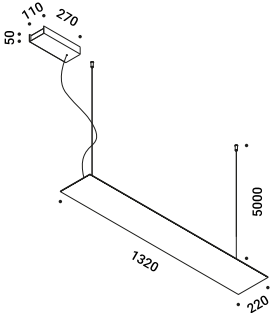


REFLEX S 1

Ceiling driver version  
56W  
110-240V - 50/60Hz  
2700K - 6136lm / 3000K - 6326lm  
CRI >90  
Driver integrated  
DALI - PUSH - 1-10V

CE IP20

Matt Black - 2700K - DALI - PUSH - 1-10V  
Matt Black - 3000K - DALI - PUSH - 1-10V

1A4790400.27.07  
1A4790400.30.07

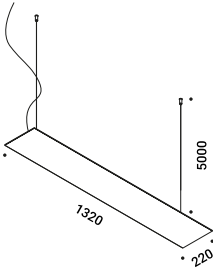

REFLEX S 2

Remote driver version  
50W  
Max 1400mA DC  
2700K - 6136lm / 3000K - 6326lm  
CRI >90  
Driver not included



CE IP20 E

Matt Black - 2700K  
Matt Black - 3000K

1A4790400.27.20  
1A4790400.30.20

Compulsory accessories

Drivers




Driver			Not included
220-240V(110-120V)	1400mA/55W(40W)/IP20/DALI - PUSH - 1-10V	REFLEX S 2	1Z0240830.1400


Driver			Not included
220-240V	1400mA/50W/IP20/TRIAC - PUSH	REFLEX S 2	1Z0241370.1400

Optional accessories


Suspension kits




Recessed suspension kit for 12,5 mm plasterboard			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.03.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.03.00
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	REFLEX S 2	1X0000300.04.00
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	REFLEX S 2	1X0000400.04.00



Ceiling suspension kit			Not included
Matt White	For suspension cables - 1 Piece		1X0010300.03.00
Matt Black	For suspension cables - 1 Piece		1X0010400.03.00
Matt White	For elettrical cables - 1 Piece	REFLEX S 2	1X0010300.04.00
Matt Black	For elettrical cables - 1 Piece	REFLEX S 2	1X0010400.04.00



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00

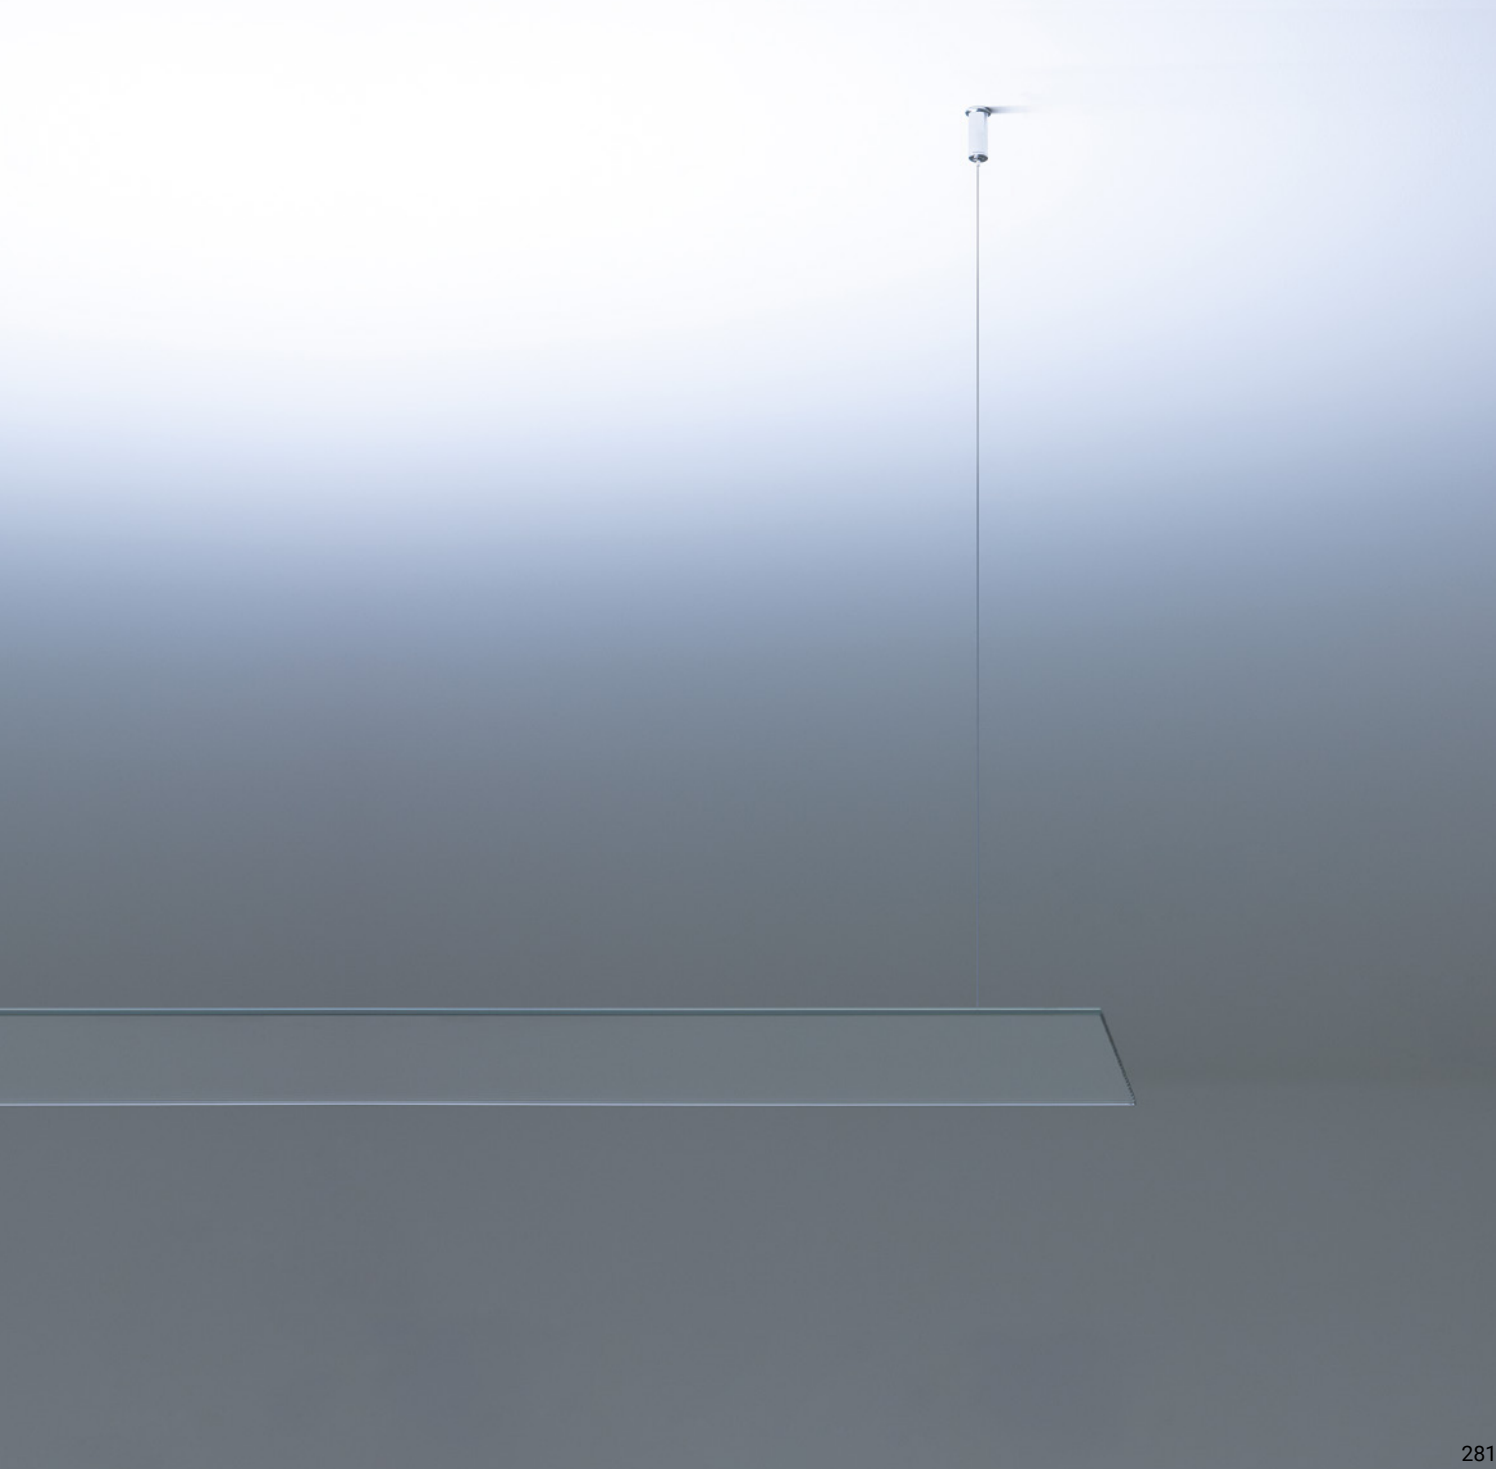



## SHANGHAI

Davide Groppi / 2013


The smallest possible shape.  
A suspended luminous segment.  
Beautiful by itself or in composition.  
Suitable for working area or kitchen.  
Luminaire designed also to be powered by ENDLESS conductive tape.



Suspension / Direct / Indoor

Material	Metal - Methacrylate	
Finish	.03 Matt White	.08 Brushed Brass

**Note** Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. Transparent cable. SHANGHAI 2: version with power cable only and without rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

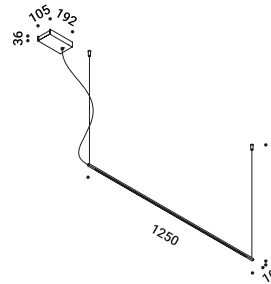


## SHANGHAI 1



Ceiling driver version  
15,5W  
110-240V - 50/60Hz  
2700K - 592lm / 3000K - 619lm  
CRI >90  
Driver integrated  
PUSH  
**CE IP20**

Brushed Brass - 3000K - PUSH  
Matt White - 2700K - PUSH  
Matt White - 3000K - PUSH  
Brushed Brass - 2700K - PUSH

1A3260800.30.04
1A3260300.27.04
1A3260300.30.04
1A3260800.27.04



## SHANGHAI 2




Remote driver version  
13W  
24V DC  
2700K - 592lm / 3000K - 619lm  
CRI >90  
Driver not included  
CE  IP20 

Matt White - 2700K  
Matt White - 3000K  
Brushed Brass - 2700K  
Brushed Brass - 3000K

1A3260300.27.20
1A3260300.30.20
1A3260800.27.20
1A3260800.30.20



### Compulsory accessories

## Drivers



## Optional accessories

### Suspension kits



Driver	Not included		
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	SHANGHAI 2	1Z0241180.24

Driver	Not included		
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V	SHANGHAI 2	1Z0240870.24

Driver	Not included		
220-240V	24V/20W/IP20/TRIAC/IGBT	SHANGHAI 2	1Z0240850.24

Sloped ceiling suspension hook	Not included
Chrome plated - 1 Piece	1A0530000.00.00

Recessed suspension kit for 12,5 mm plasterboard			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.01.00
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000400.04.00

Ceiling suspension kit			Not included
Matt White	For suspension cables - 1 Piece		1X0010300.01.00
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00
Matt White	For electrical cables - 1 Piece	SHANGHAI 2	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	SHANGHAI 2	1X0010400.04.00

Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

## SIMBIOSI

Davide Groppi / 2015




A de-structured chandelier that can be re-assembled as you like.  
A conjuring trick that gives you the possibility of connecting the diodes in series  
using very weak electric currents with wires that are practically invisible.  
The very thin wire that connects the light sources and brings them alive,  
one in relation to the other, is the principal component of this project.

Suspension / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.19 Polished Gold	.26 Total Black
Note	Suspension luminaire. Matt white rose and red cables for the matt white finish. Matt black rose and anthracite grey cables for the other finishes. AISI 304 stainless steel suspension cables.		

	<b>SIMBIOSI</b> 15W 110-240V - 50/60Hz 2700K - 931lm / 3000K - 960lm CRI >90 Driver integrated DALI C E IP20	Matt White - 2700K - DALI Matt White - 3000K - DALI Polished Gold - 2700K - DALI Polished Gold - 3000K - DALI Total Black - 2700K - DALI Total Black - 3000K - DALI	1A2870300.27.01 1A2870300.30.01 1A2871900.27.01 1A2871900.30.01 1A2872600.27.01 1A2872600.30.01
	<b>SIMBIOSI</b> 16W 110-240V - 50/60Hz 2700K - 931lm / 3000K - 960lm CRI >90 Driver integrated PUSH C E IP20	Matt White - 2700K - PUSH Matt White - 3000K - PUSH Polished Gold - 2700K - PUSH Polished Gold - 3000K - PUSH Total Black - 2700K - PUSH Total Black - 3000K - PUSH	1A2870300.27.04 1A2870300.30.04 1A2871900.27.04 1A2871900.30.04 1A2872600.27.04 1A2872600.30.04

Optional accessories

	Sloped ceiling suspension hook	Not included
	Chrome plated - 1 Piece	1A0530000.00.00

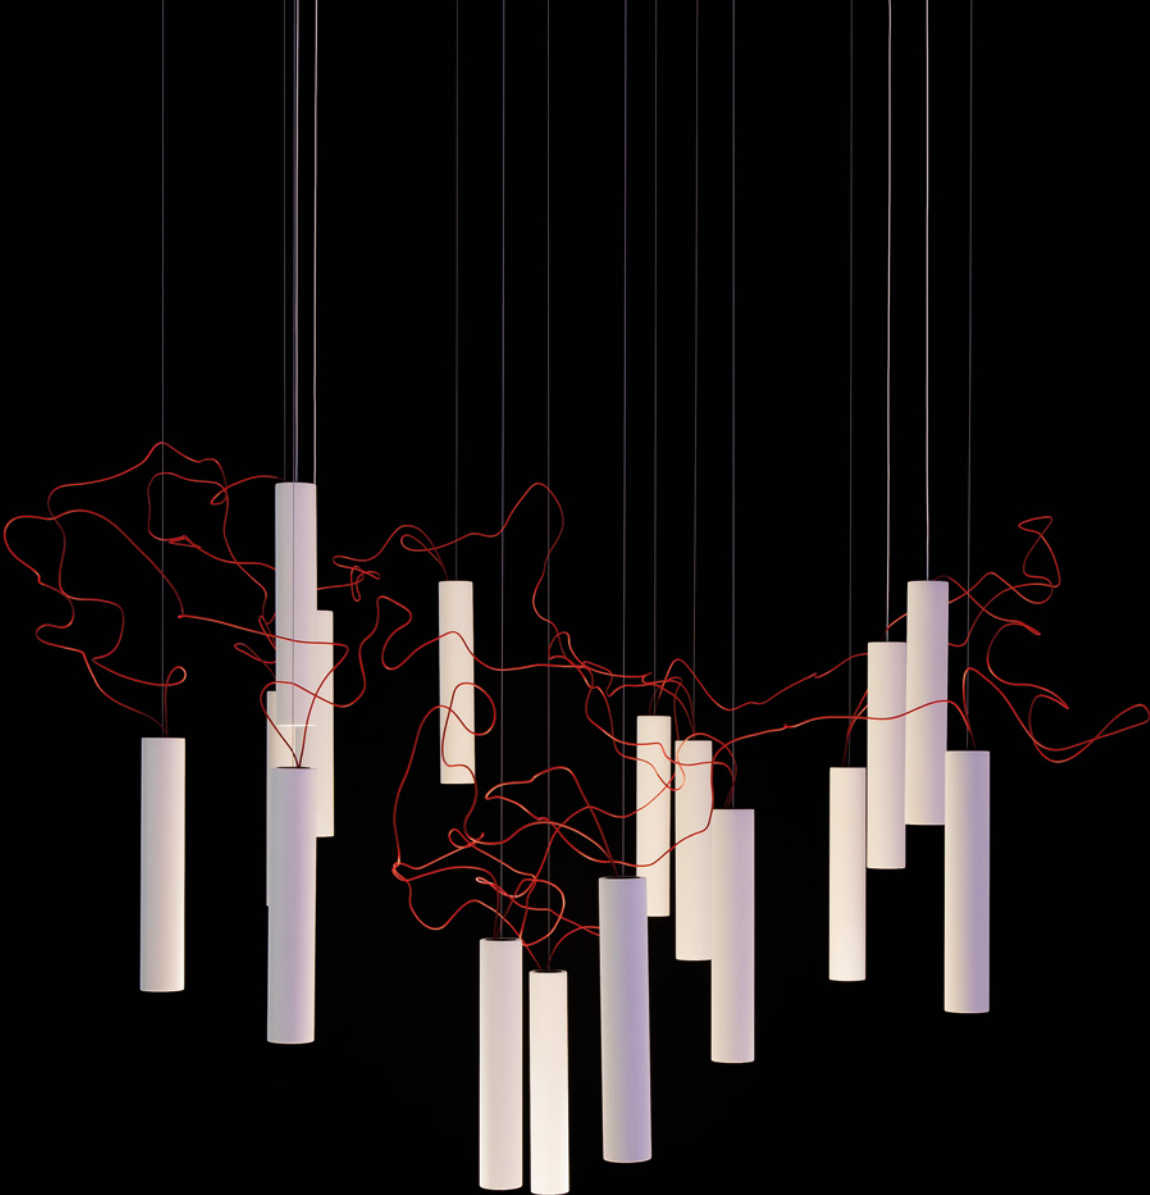





**Private Residence**  
Bologna

**SIMBIOSI**







## SOTTILE

Davide Groppi / 2023


A blade of light just 7 millimetres thick,  
the expression of that purest and most essential part of our thought.  
The surprise of an extremely thin, yet at the same time very bright, lamp.  
Luminaire designed also to be powered by ENDLESS conductive tape.



Suspension / Direct / Indoor

Material	Metal			
Finish	.03 Matt White	.04 Matt Black	.29 Brushed Bronze	.36 Brushed Black

**Note** Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cable. White cable for the matt white finish, black cable for the other finishes. SOTTILE 1 DE and SOTTILE 2 DE: mono on/off and dual emission version. SOTTILE 2 and SOTTILE 2 DE: version with power cable only and without rose. Luminaire designed to be powered by our ENDLESS conductive tape and dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

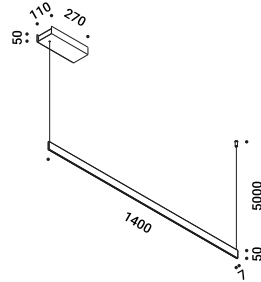	<b>SOTTILE 1</b>		
	Ceiling driver version	Matt White - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4230300.27.05
	21W	Matt White - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4230300.30.05
	220-240V - 50/60Hz	Matt Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4230400.27.05
	2700K - 1692lm / 3000K - 1855lm	Matt Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4230400.30.05
	CRI >90	Brushed Bronze - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4232900.27.05
	Driver integrated	Brushed Bronze - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4232900.30.05
	DALI - PUSH - 1-10V - TRIAC	Brushed Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4233600.27.05
	CE IP20	Brushed Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4233600.30.05



	<b>SOTTILE 1 DE</b>		
	Ceiling driver version - Dual emission	Matt White - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4640300.27.05
	41W	Matt White - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4640300.30.05
	220-240V - 50/60Hz	Matt Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4640400.27.05
	2700K - Up 1692lm - Down 1692lm / 3000K - Up 1855lm - Down 1855lm	Matt Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4640400.30.05
	CRI >90	Brushed Bronze - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4642900.27.05
	Driver integrated	Brushed Bronze - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4642900.30.05
	DALI - PUSH - 1-10V - TRIAC	Brushed Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4643600.27.05
	CE IP20	Brushed Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4643600.30.05

	<b>SOTTILE 2</b>	Matt White - 2700K	1A4230300.27.20
	Remote driver version	Matt White - 3000K	1A4230300.30.20
	19W	Matt Black - 2700K	1A4230400.27.20
	24V DC	Matt Black - 3000K	1A4230400.30.20
	2700K - 1692lm / 3000K - 1855lm	Brushed Bronze - 2700K	1A4232900.27.20
	CRI >90	Brushed Bronze - 3000K	1A4232900.30.20
	Driver not included	Brushed Black - 2700K	1A4233600.27.20
	CE IP20 E	Brushed Black - 3000K	1A4233600.30.20

	<b>SOTTILE 2 DE</b>	Matt White - 2700K	1A4640300.27.20
	Remote driver version - Dual emission	Matt White - 3000K	1A4640300.30.20
	2x19W	Matt Black - 2700K	1A4640400.27.20
	24V DC	Matt Black - 3000K	1A4640400.30.20
	2700K - Up 1692lm - Down 1692lm / 3000K - Up 1855lm - Down 1855lm	Brushed Bronze - 2700K	1A4642900.27.20
	CRI >90	Brushed Bronze - 3000K	1A4642900.30.20
	Driver not included	Brushed Black - 2700K	1A4643600.27.20
	CE IP20 E	Brushed Black - 3000K	1A4643600.30.20

Compulsory accessories

Drivers




Driver		Not included	
100-240V	24V/50W/IP20/ON/OFF	SOTTILE 2 / SOTTILE 2 DE	1Z1120490

Controller		Not included	
	DALI - PUSH - 0/1-10V - TRIAC - IP20	SOTTILE 2 / SOTTILE 2 DE	1Z2170010




Optional accessories


Suspension kits



Recessed suspension kit for 12,5 mm plasterboard				Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.01.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTILE 2 / SOTTILE 2 DE	1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTILE 2 / SOTTILE 2 DE	1X0000400.04.00	




Ceiling suspension kit				Not included
Matt White	For suspension cables - 1 Piece		1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00	
Matt White	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE	1X0010400.04.00	



Wall adapter plate				Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00	



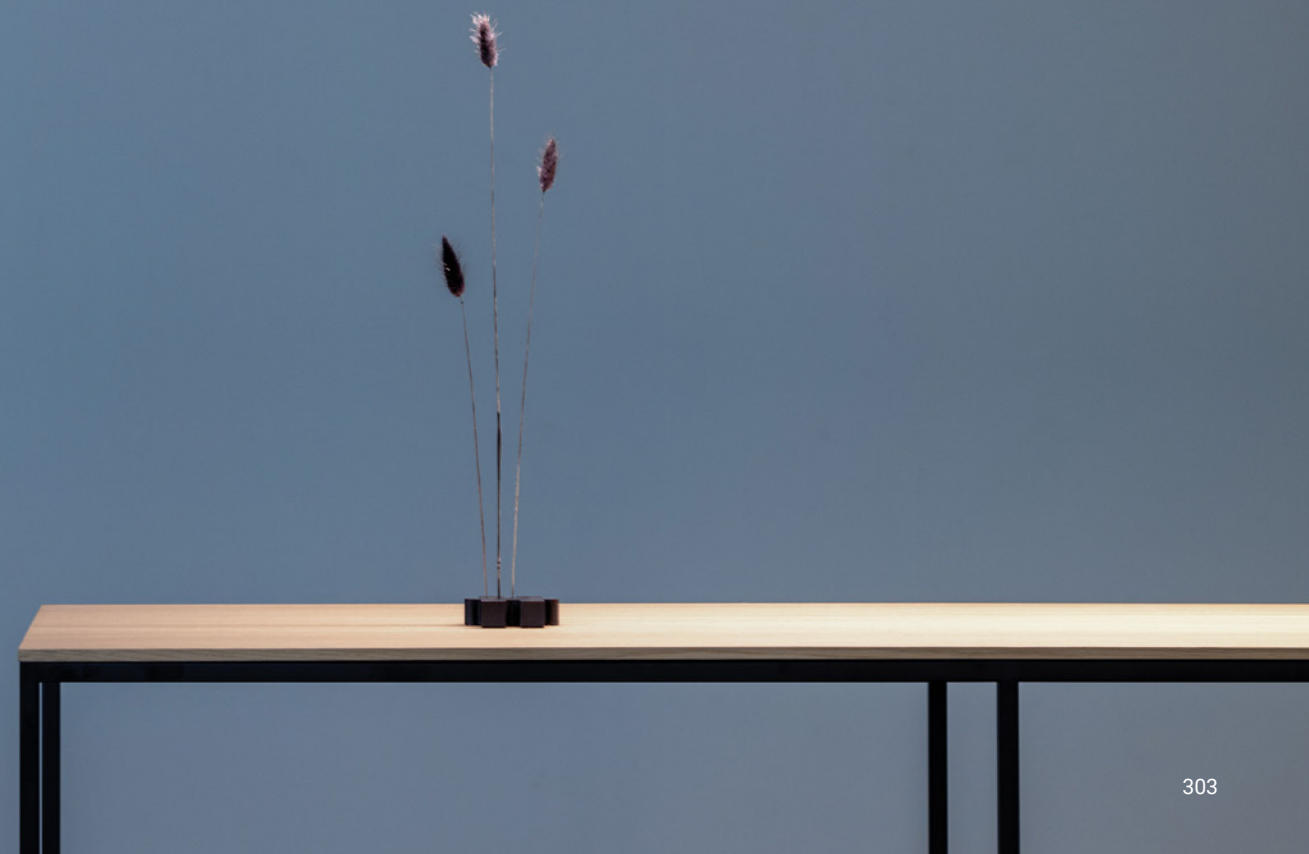



Abba Restaurant  
Milano

SOTTILE







## SOTTOSOPRA


Davide Groppi / 2023

The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time.  
Sottosopra: pure, elegant, wonderfully efficient.

Suspension / Direct-Indirect / Indoor

Material Metal  
Finish .03 Matt White

Note Suspension luminaire. Matt white rose. Dual emission and on/off. White cable. SOTTOSOPRA 2: version with power cable only and without rose.

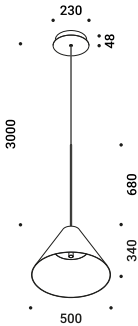


SOTTOSOPRA 1

Ceiling driver version  
27W  
220-240V - 50/60Hz  
2700K - Up 375lm - Down 366lm /  
3000K - Up 387lm - Down 366lm  
CRI >90  
UGR <19  
Driver integrated  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT

1A4540300.27.02  
1A4540300.30.02

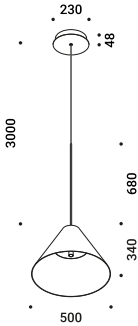


SOTTOSOPRA 1

Ceiling driver version  
27W  
110-240V - 50/60Hz  
2700K - Up 375lm - Down 366lm /  
3000K - Up 387lm - Down 366lm  
CRI >90  
UGR <19  
Driver integrated  
DALI - PUSH - 1-10V  
CE IP20

Matt White - 2700K - DALI - PUSH - 1-10V  
Matt White - 3000K - DALI - PUSH - 1-10V

1A4540300.27.07  
1A4540300.30.07

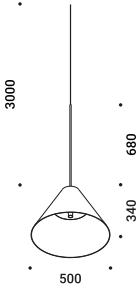

SOTTOSOPRA 2



Remote driver version  
24W  
Max 500mA DC  
2700K - Up 375lm - Down 366lm /  
3000K - Up 387lm - Down 366lm  
CRI >90  
UGR <19  
Driver not included  
2 Drivers required  
CE IP20

Matt White - 2700K  
Matt White - 3000K

1A4540300.27.20  
1A4540300.30.20

Compulsory accessories

Drivers



Driver				Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	SOTTOSOPRA 2	1Z0240850.500	

Driver				Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	SOTTOSOPRA 2	1Z0241270.500	


Optional accessories

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard				Not included
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTOSOPRA 2	1X0000300.05.00	
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTOSOPRA 2	1X0000400.05.00	



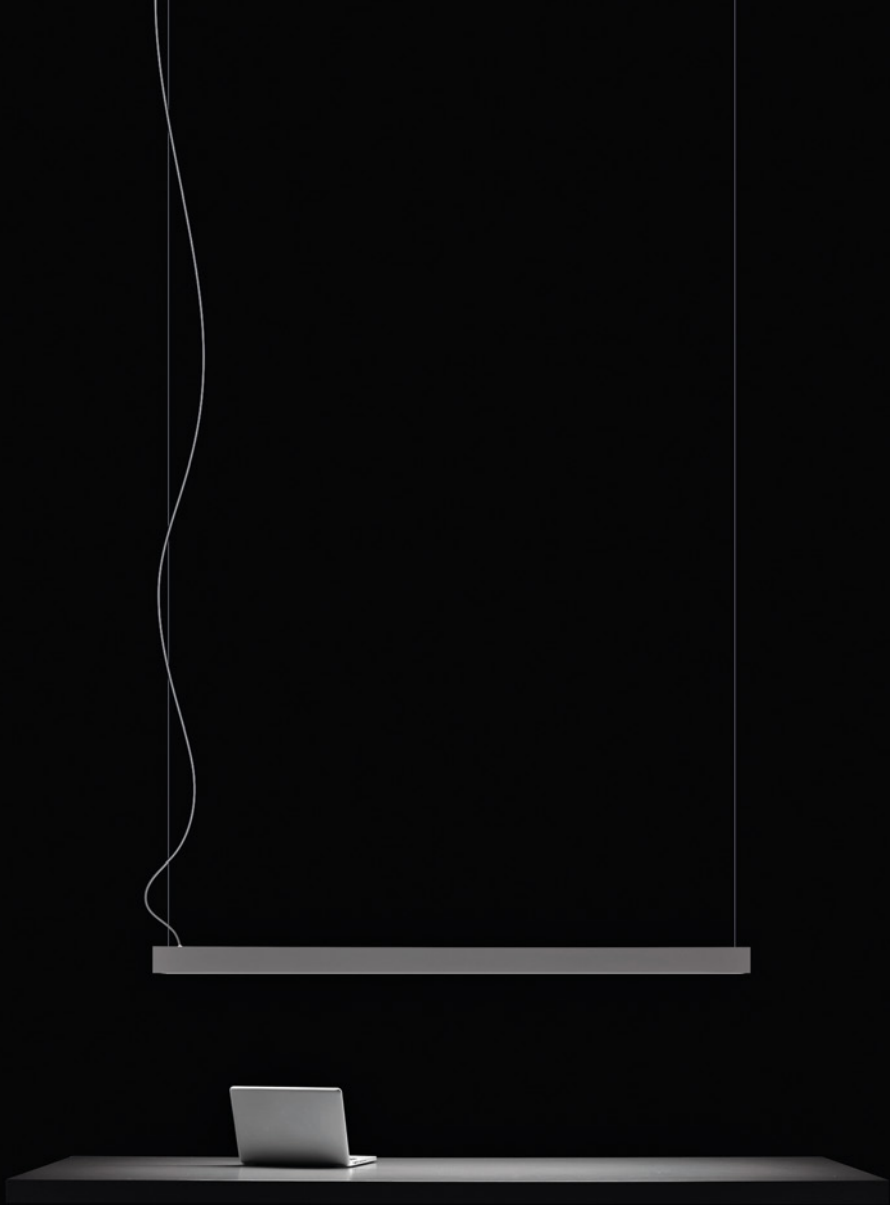


A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.



Suspension / Direct / Indoor	
Material	Metal - Polycarbonate
Finish	.03 Matt White
Note	Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. White cable.



**SPY**  
39W  
110-240V - 50/60Hz  
3000K - 4292lm  
CRI >80  
UGR <19  
Driver integrated  
DALI  
CE IP20

Matt White - 3000K - DALI

1A2910300.30.01

Optional accessories

Suspension kits




Sloped ceiling suspension kit		Not included
Nickel plated - 1 Piece		1A0510000.00.00



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.03.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.03.00



Ceiling suspension kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00



Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

WALL

## DOT P

Omar Carraglia - Davide Groppi / 2015




A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.  
Luminaire available also in ENDLESS version.

Wall-Ceiling / Direct / Indoor

Material	Metal		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold

**Note** Wall luminaire. Adjustable in all directions. DOT P DE and DOT P DE 51: dual emission versions. DOT P ENDLESS and DOT P ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.




**DOT P**

13W  
100-240V - 50/60Hz  
2700K / 3000K  
CRI >97  
Driver integrated  
DALI

CE IP20

Matt White - 2700K - DALI
Matt White - 3000K - DALI
Matt Black - 2700K - DALI
Matt Black - 3000K - DALI
Matt Black/Polished Gold - 2700K - DALI
Matt Black/Polished Gold - 3000K - DALI

1A2340300.27.01
1A2340300.30.01
1A2340400.27.01
1A2340400.30.01
1A2344900.27.01
1A2344900.30.01




**DOT P**

13W  
100-240V - 50/60Hz  
2700K / 3000K  
CRI >97  
Driver integrated  
PUSH

CE IP20

Matt White - 2700K - PUSH
Matt White - 3000K - PUSH
Matt Black - 2700K - PUSH
Matt Black - 3000K - PUSH
Matt Black/Polished Gold - 2700K - PUSH
Matt Black/Polished Gold - 3000K - PUSH

1A2340300.27.04
1A2340300.30.04
1A2340400.27.04
1A2340400.30.04
1A2344900.27.04
1A2344900.30.04




**DOT P 51**

Max 10W - GU10  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included

CE IP20

Matt White - ON/OFF
Matt Black - ON/OFF
Matt Black/Polished Gold - ON/OFF

1A2490300.00.00
1A2490400.00.00
1A2494900.00.00




**DOT P ENDLESS**

ENDLESS version only  
13W - 0,34A  
48V DC  
2700K / 3000K  
CRI >97  
Driver not included  
See page ENDLESS

CE IP20 ENEC

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Matt Black/Polished Gold - 2700K
Matt Black/Polished Gold - 3000K

1A2340300.27.40
1A2340300.30.40
1A2340400.27.40
1A2340400.30.40
1A2344900.27.40
1A2344900.30.40



**DOT P ENDLESS CASAMBI**


ENDLESS version only  
15,5W - 0,4A  
48V DC  
2700K / 3000K  
CRI >97  
Driver not included  
See page ENDLESS

CE IP20 ENEC A

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Matt Black/Polished Gold - 2700K
Matt Black/Polished Gold - 3000K

1A2340300.27.41
1A2340300.30.41
1A2340400.27.41
1A2340400.30.41
1A2344900.27.41
1A2344900.30.41






DOT P DE

Dual emission  
29W  
220-240V - 50/60Hz  
2700K / 3000K  
CRI >97  
Driver integrated  
DALI



Matt White - 2700K - DALI	1A4900300.27.01
Matt White - 3000K - DALI	1A4900300.30.01
Matt Black - 2700K - DALI	1A4900400.27.01
Matt Black - 3000K - DALI	1A4900400.30.01
Matt Black/Polished Gold - 2700K - DALI	1A4904900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A4904900.30.01



DOT P DE 51

Dual emission  
Max 2x10W - GU10  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included



Matt White - ON/OFF	1A3810300.00.00
Matt Black - ON/OFF	1A3810400.00.00
Matt Black/Polished Gold - ON/OFF	1A3814900.00.00

Compulsory accessories


Other accessories




Lens		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT P	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 1966lm	DOT P DE	
Beam - 24°	3000K - CRI >97 - 2076lm		
	2700K - CRI >97 - 943lm	DOT P	1A3100000.00.00
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS	
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 1886lm	DOT P DE	
	3000K - CRI >97 - 1992lm		
	2700K - CRI >97 - 955lm	DOT P	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS	
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS CASAMBI	
Beam - 50°	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 1910lm	DOT P DE	
	3000K - CRI >97 - 2010lm		
	2700K - CRI >97 - 965lm	DOT P	1A3120000.00.00
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 1930lm	DOT P DE	
	3000K - CRI >97 - 2032lm		

Optional accessories


Other accessories




Accessory holder + Honeycomb louvre		Not included	
		DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080400.01.00




Elliptical filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.02.00



Blue filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.03.00



Red filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.04.00



Yellow filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.05.00

Optional accessories

Bulbs



LED - GU10 - PAR16		Not included	
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y0330500




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580210




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580010


Other accessories



Darklight		Not included	
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580040



25° beam filter		Not included	
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580020



36° beam filter		Not included	
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580030






It is pure form.  
A tool to light, simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.



Wall / Diffuse / Indoor				
Material	Glass - Metal			
Finish	.03 Matt White	.04 Matt Black	.08 Brushed Brass	
Note	Wall luminaire. Dual emission.			




DUET

23W  
220-240V - 50/60Hz  
2700K - 1293lm / 3000K - 1352lm  
CRI >90  
TRIAC/IGBT



Matt White - 2700K - TRIAC/IGBT	1A3300300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3300300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3300400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3300400.30.02
Brushed Brass - 2700K - TRIAC/IGBT	1A3300800.27.02
Brushed Brass - 3000K - TRIAC/IGBT	1A3300800.30.02



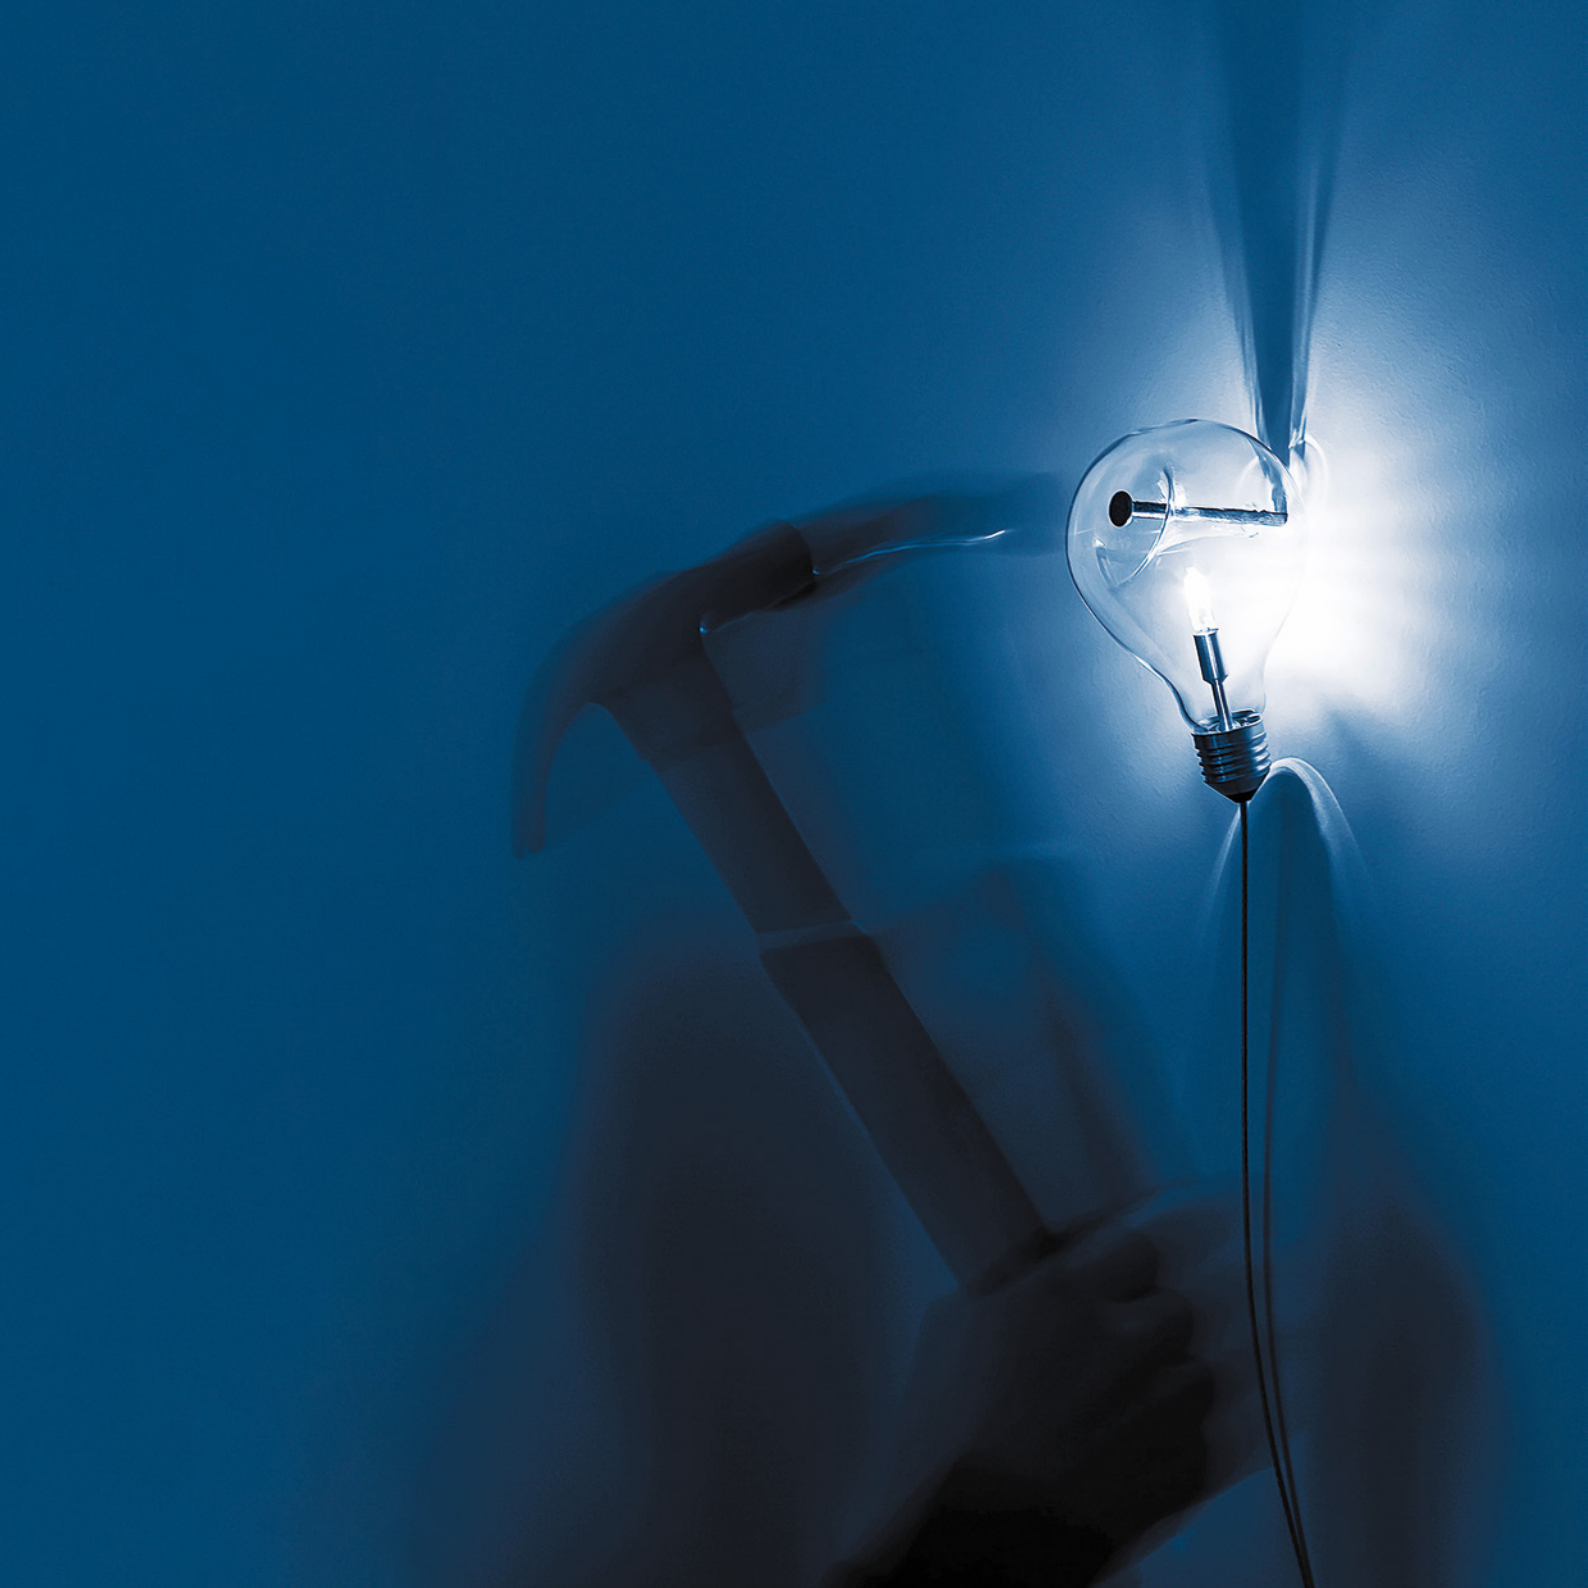

## EDISON'S NIGHTMARE

Harry Thaler / 2014

A gestural project, full of irony and nostalgia.  
Therefore, among a thousand stories, prohibitions, absurd technical rules,  
we have reached the end. The end of the incandescent bulb.

Edison's Nightmare is a salute to Edison's light bulb\*,  
a dream that changed the way we live forever, stealing time to read and write from sleep.

It is a classic light bulb, nailed to the wall. Like a work of art.

*\* From 01 September 2012, incandescent bulbs cannot be sold in the EU.*

EDISON'S NIGHTMARE

Harry Thaler / 2014

Wall / Diffuse / Indoor

Material


Blown glass - Metal

Finish

.00 Standard

Note

Wall luminaire. Blown glass diffuser. Dimmer on the cable. Transparent cable.



EDISON'S NIGHTMARE

Max 10W - G4 - 12V

100-240V - 50/60Hz

Driver integrated

Dimmer on board

Bulb included


CE IP20

Standard - Dimmer on board

1A3380009.00.06

Optional accessories

Bulbs



HALOGEN - G4 - T10

12V - 10W - 360°

2800K - 145lm - CRI >100

Energy Efficiency G - Dimmable

1Y0041490

Included





A luminous short film.

Telling a story in light, a series of old 35MM slides are lit from behind,  
pulsating and shown at random.

The photographs can be assembled and replaced as you like.

The choice of the message to be communicated is completely personal:  
it can be an image, a logo, a sentence, anything you want to represent, at any time.


The light message is punctuated by a blinking LED, offering reading in movement.



Objects-Wall / Diffuse / Indoor

**Material** Metal - Polycarbonate  
**Finish** .00 Standard

**Note** Modular wall luminaire. Matt black support. Customised images not included. Module connector included. Black cable.

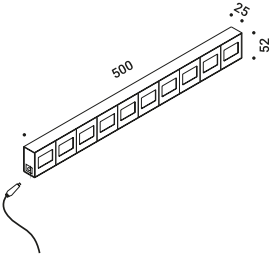

**FILM**  
3W  
5V DC  
Driver not included  
ON/OFF  
CE IP20

Standard - ON/OFF

| 1A3410000.00.00 |

Compulsory accessories

Drivers			
	<b>Driver with plug</b> Not included		
	Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 15W - IP40	1Z1470180
	<b>Driver</b> Not included		
	100-240V	5V/17,5W/IP20/ON/OFF	1Z1120180






## FOIL

967ARCH / 2011

An architectural lamp for wall and ceiling installation.  
Although it's there, you can't see the thickness.  
A luminaire that amazes with skill, so you only notice its two-dimensional effect.

Wall / Indirect / Indoor			
Material	Metal		
Finish	.03 Matt White	.04	Matt Black
Note	Wall luminaire.		



FOIL

24,5W  
220-230V - 50/60Hz  
2700K - 1681lm / 3000K - 1808lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT  
Matt Black - 2700K - TRIAC/IGBT  
Matt Black - 3000K - TRIAC/IGBT

1A3150300.27.02  
1A3150300.30.02  
1A3150400.27.02  
1A3150400.30.02






An indirect wall light project.  
The light source remains invisible while the light comes out soft from the metal diffuser,  
creating a delicate atmosphere.



FOLDER

967ARCH / 2013

Wall / Indirect / Indoor	
Material	Metal
Finish	.03 Matt White
Note	Wall luminaire.



**FOLDER**  
20W  
110-240V - 50/60Hz  
2700K - 397lm / 3000K - 415lm  
CRI >80  
Driver integrated  
DALI  
CE IP20

Matt White - 2700K - DALI  
Matt White - 3000K - DALI

1A3350300.27.01  
1A3350300.30.01





FOLDER

502

DO NOT  
DISTURB



Golden Crown Hotel  
Prague





## LINET

Omar Carraglia / 2014

A tool to light.

The luminaire is pure form, a simple container for the light source.

Single-emission lamp with light directed downwards.


Light is incorporated into the space, becoming an architectural element.



LINET

Omar Carraglia / 2014

Wall / Diffuse / Indoor		
Material	Metal - Methacrylate	
Finish	.03 Matt White	.04 Matt Black
Note	Wall luminaire.	



**LINET**  
11,5W  
220-240V - 50/60Hz  
2700K - 626lm / 3000K - 655lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT  
Matt Black - 2700K - TRIAC/IGBT  
Matt Black - 3000K - TRIAC/IGBT

1A3310300.27.02  
1A3310300.30.02  
1A3310400.27.02  
1A3310400.30.02



## MIRA


Omar Carraglia / 2012

Lamp with a simple and essential shape.  
For interiors and adjustable.  
Luminaire available also in ENDLESS version.

Wall-Ceiling / Direct / Indoor

Material	Metal		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold

**Note** Wall luminaire. Adjustable in all directions. MIRA ENDLESS and MIRA ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.




MIRA SWITCH

8W  
110-240V - 50/60Hz  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver integrated  
ON/OFF

CE IP20

Matt White - 2700K - ON/OFF
Matt White - 3000K - ON/OFF
Matt Black - 2700K - ON/OFF
Matt Black - 3000K - ON/OFF
Matt Black/Polished Gold - 2700K - ON/OFF
Matt Black/Polished Gold - 3000K - ON/OFF

1A2280300.27.00
1A2280300.30.00
1A2280400.27.00
1A2280400.30.00
1A2284900.27.00
1A2284900.30.00




MIRA

8W  
110-240V - 50/60Hz  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver integrated  
DALI

CE IP20

Matt White - 2700K - DALI
Matt White - 3000K - DALI
Matt Black - 2700K - DALI
Matt Black - 3000K - DALI
Matt Black/Polished Gold - 2700K - DALI
Matt Black/Polished Gold - 3000K - DALI

1A2280300.27.01
1A2280300.30.01
1A2280400.27.01
1A2280400.30.01
1A2284900.27.01
1A2284900.30.01




MIRA

8W  
110-240V - 50/60Hz  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver integrated  
PUSH

CE IP20

Matt White - 2700K - PUSH
Matt White - 3000K - PUSH
Matt Black - 2700K - PUSH
Matt Black - 3000K - PUSH
Matt Black/Polished Gold - 2700K - PUSH
Matt Black/Polished Gold - 3000K - PUSH

1A2280300.27.04
1A2280300.30.04
1A2280400.27.04
1A2280400.30.04
1A2284900.27.04
1A2284900.30.04




MIRA ENDLESS

ENDLESS version only  
6W - 0,16A  
48V DC  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver not included  
See page ENDLESS

CE IP20 E

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Matt Black/Polished Gold - 2700K
Matt Black/Polished Gold - 3000K

1A2280300.27.40
1A2280300.30.40
1A2280400.27.40
1A2280400.30.40
1A2284900.27.40
1A2284900.30.40



MIRA ENDLESS CASAMBI


ENDLESS version only  
7W - 0,18A  
48V DC  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver not included  
See page ENDLESS

CE IP20 E A

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Matt Black/Polished Gold - 2700K
Matt Black/Polished Gold - 3000K

1A2280300.27.41
1A2280300.30.41
1A2280400.27.41
1A2280400.30.41
1A2284900.27.41
1A2284900.30.41











## MIRA MAGNETIC

Omar Carraglia / 2015

Lamp with a simple and essential shape.  
For interiors and adjustable, it is designed with a magnetic application system  
to be even more versatile and functional.


MIRA MAGNETIC

Omar Carraglia / 2015

Wall-Ceiling / Direct / Indoor

Material	Metal		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold

**Note** Wall luminaire. Adjustable in all directions. Magnetic fixing. Dimmer on the cable. White cable for the matt white finish, black cable for the other finishes.



MIRA MAGNETIC

5,6W  
Max 500mA DC  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver not included

CE IP20


Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K  
Matt Black/Polished Gold - 2700K  
Matt Black/Polished Gold - 3000K

1A3680300.27.20  
1A3680300.30.20  
1A3680400.27.20  
1A3680400.30.20  
1A3684900.27.20  
1A3684900.30.20


Compulsory accessories

Drivers		
Driver		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500
Driver with plug		Not included
Matt White	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180300.00.06
Matt Black	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180400.00.06



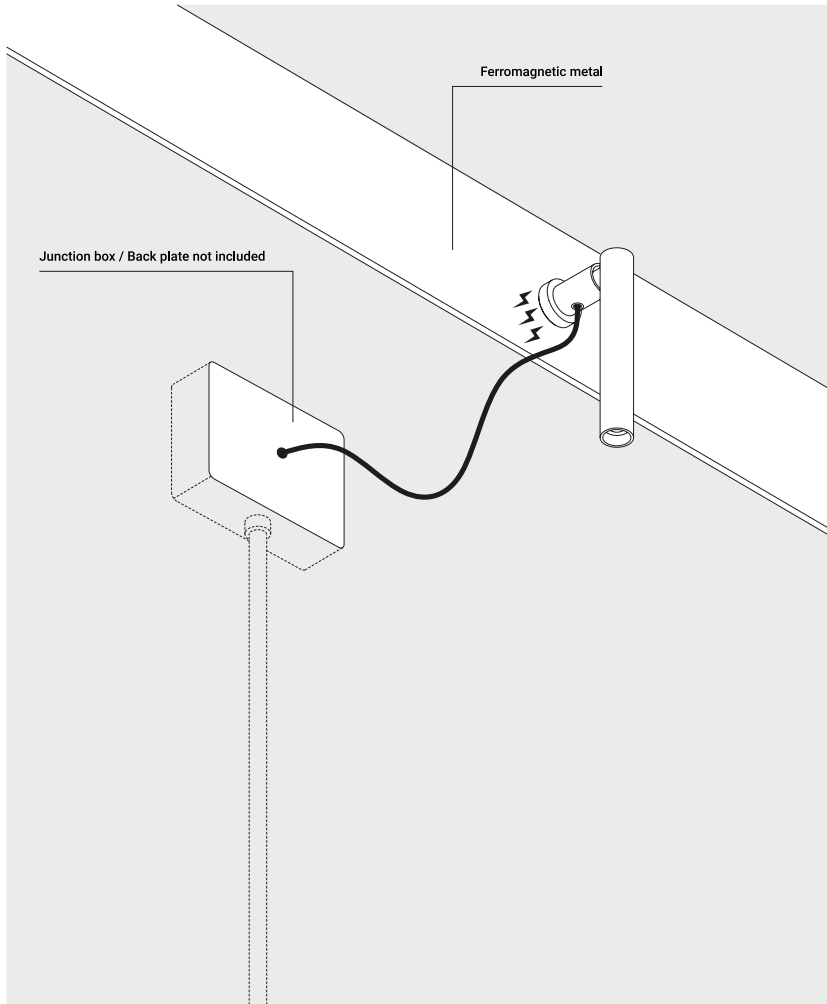


Example of installation with remote driver

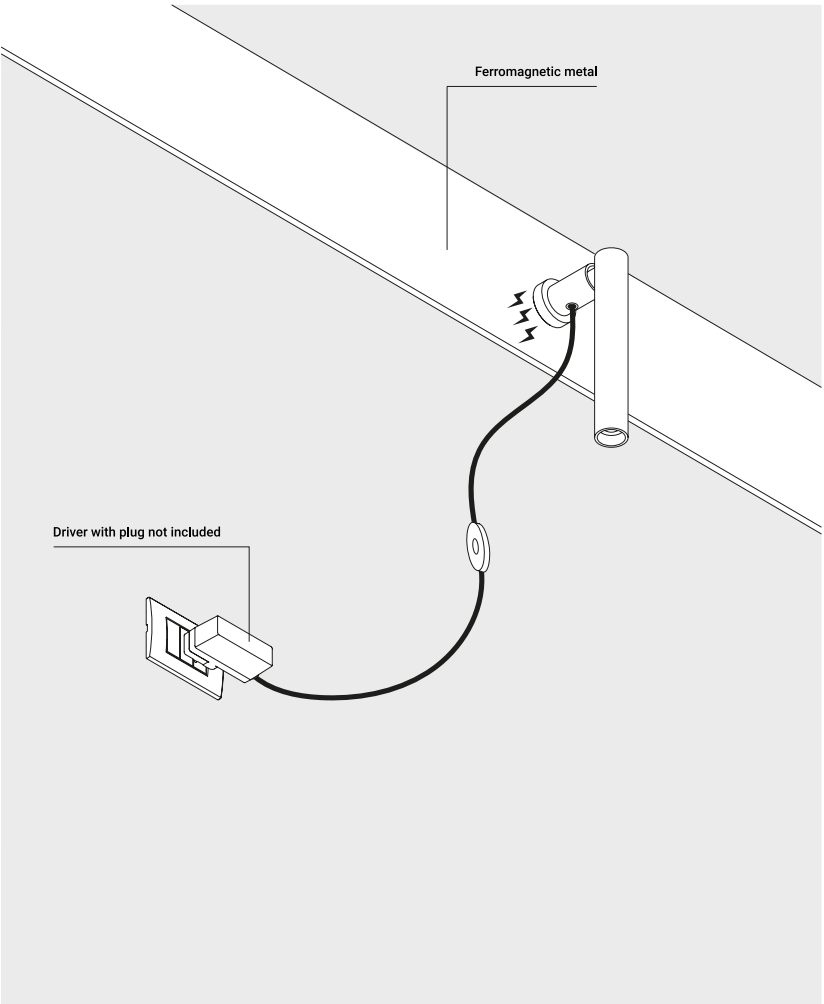

1A3180300.00.06 - 1A3180400.00.06 - Example of installation with driver with plug



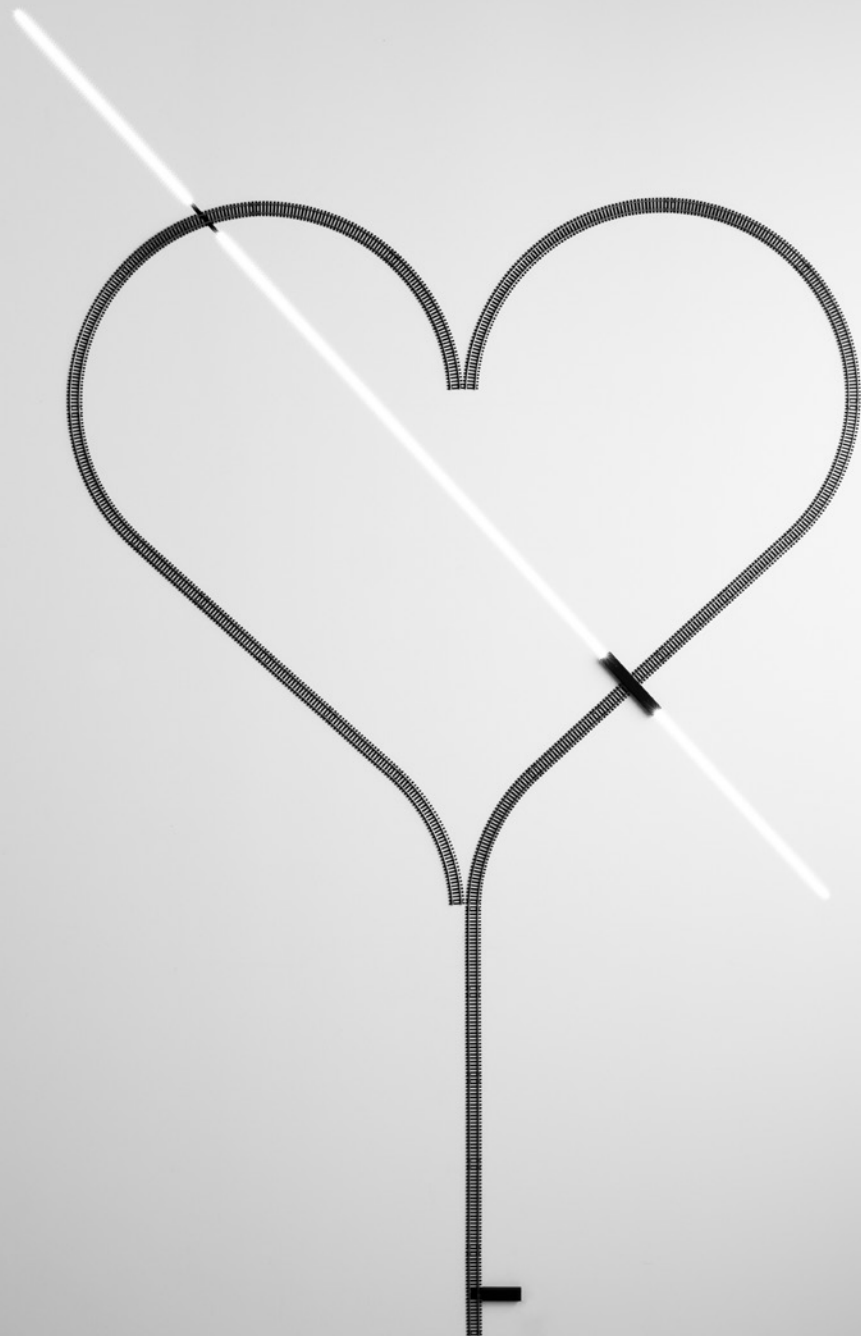


A ready-made project to design the space with a sense of irony and weightlessness. The tracks of an electric train can be used to draw a heart, but also to conduct electricity. Rail is the boundary between usefulness and show, between art and design.

RAIL


Davide Groppi / 2019

Wall / Direct / Indoor	
Material	ABS - Metal
Finish	.00 Standard
Note	Wall luminaire. Matt black modular tracks. Dimmer on the cable. Black cable.

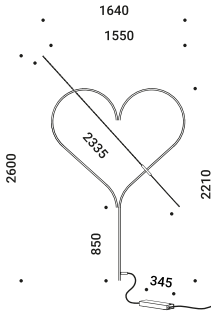

**RAIL**  
22W  
24V DC  
3000K - 2000lm  
CRI >90  
Driver included  
Dimmer on board  
CE IP20

Standard - 3000K - Dimmer on board | 1A3400009.30.06 |

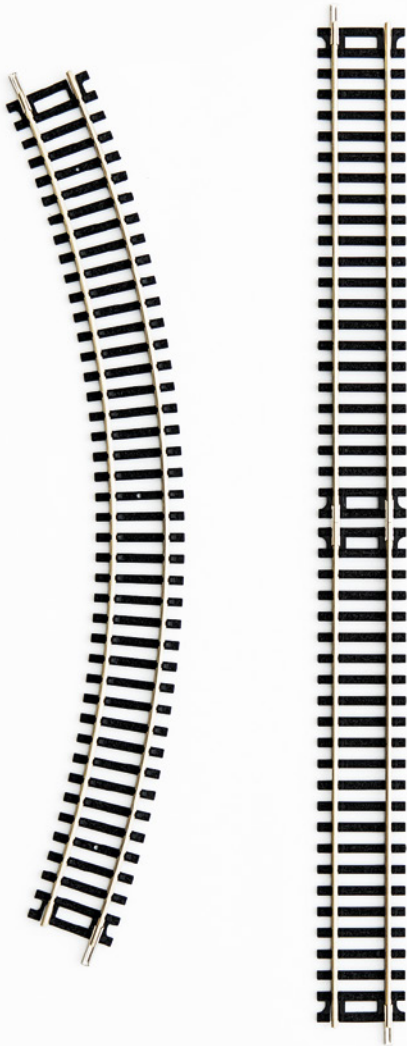







## REFLEX

Michele Groppi / 2022



A powerful LED and a subtle mirror.  
A magic and almost invisible lighting solution,  
which provides an indirect light that multiplies spaces  
and gives the eye unprecedented perspectives, unexpected depths, illusions of light.  
Suspension version also available.  
Luminaire designed also to be powered by ENDLESS system.



Wall / Indirect / Indoor	
Material	Metal - Mirror
Finish	.04 Matt Black
Note	Wall luminaire. Plane with mirror finish. Matt black rear plane. Possibility for the luminaire to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

	<b>REFLEX</b>	
	40W - 1,04A	
	48V DC	
	2700K - 3676lm / 3000K - 3761lm	
	CRI >90	
	Driver not included	
	  	
	Matt Black - 2700K	1A5500400.27.20
	Matt Black - 3000K	1A5500400.30.20

Compulsory accessories

	<b>Driver</b>		Not included
	100-240V	48V/60W/IP67/ON/OFF	1Z1120640
	<b>Driver</b>		Not included
	220-240V	48V/60W/IP20/DALI	1Z0830820








Reflections of light.

The pure and essential form of a thin mirror wich provides indirect light.

SHADE

Federico Delrosso / 2013

Wall / Indirect / Indoor	
Material	Metal - Mirror
Finish	.00 Standard
Note	Wall luminaire. Plane with mirror finish. Dual emission.




**SHADE**  
23W  
220-240V - 50/60Hz  
2700K - 1293lm / 3000K - 1352lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Standard - 2700K - TRIAC/IGBT  
Standard - 3000K - TRIAC/IGBT

1A3360000.27.02  
1A3360000.30.02



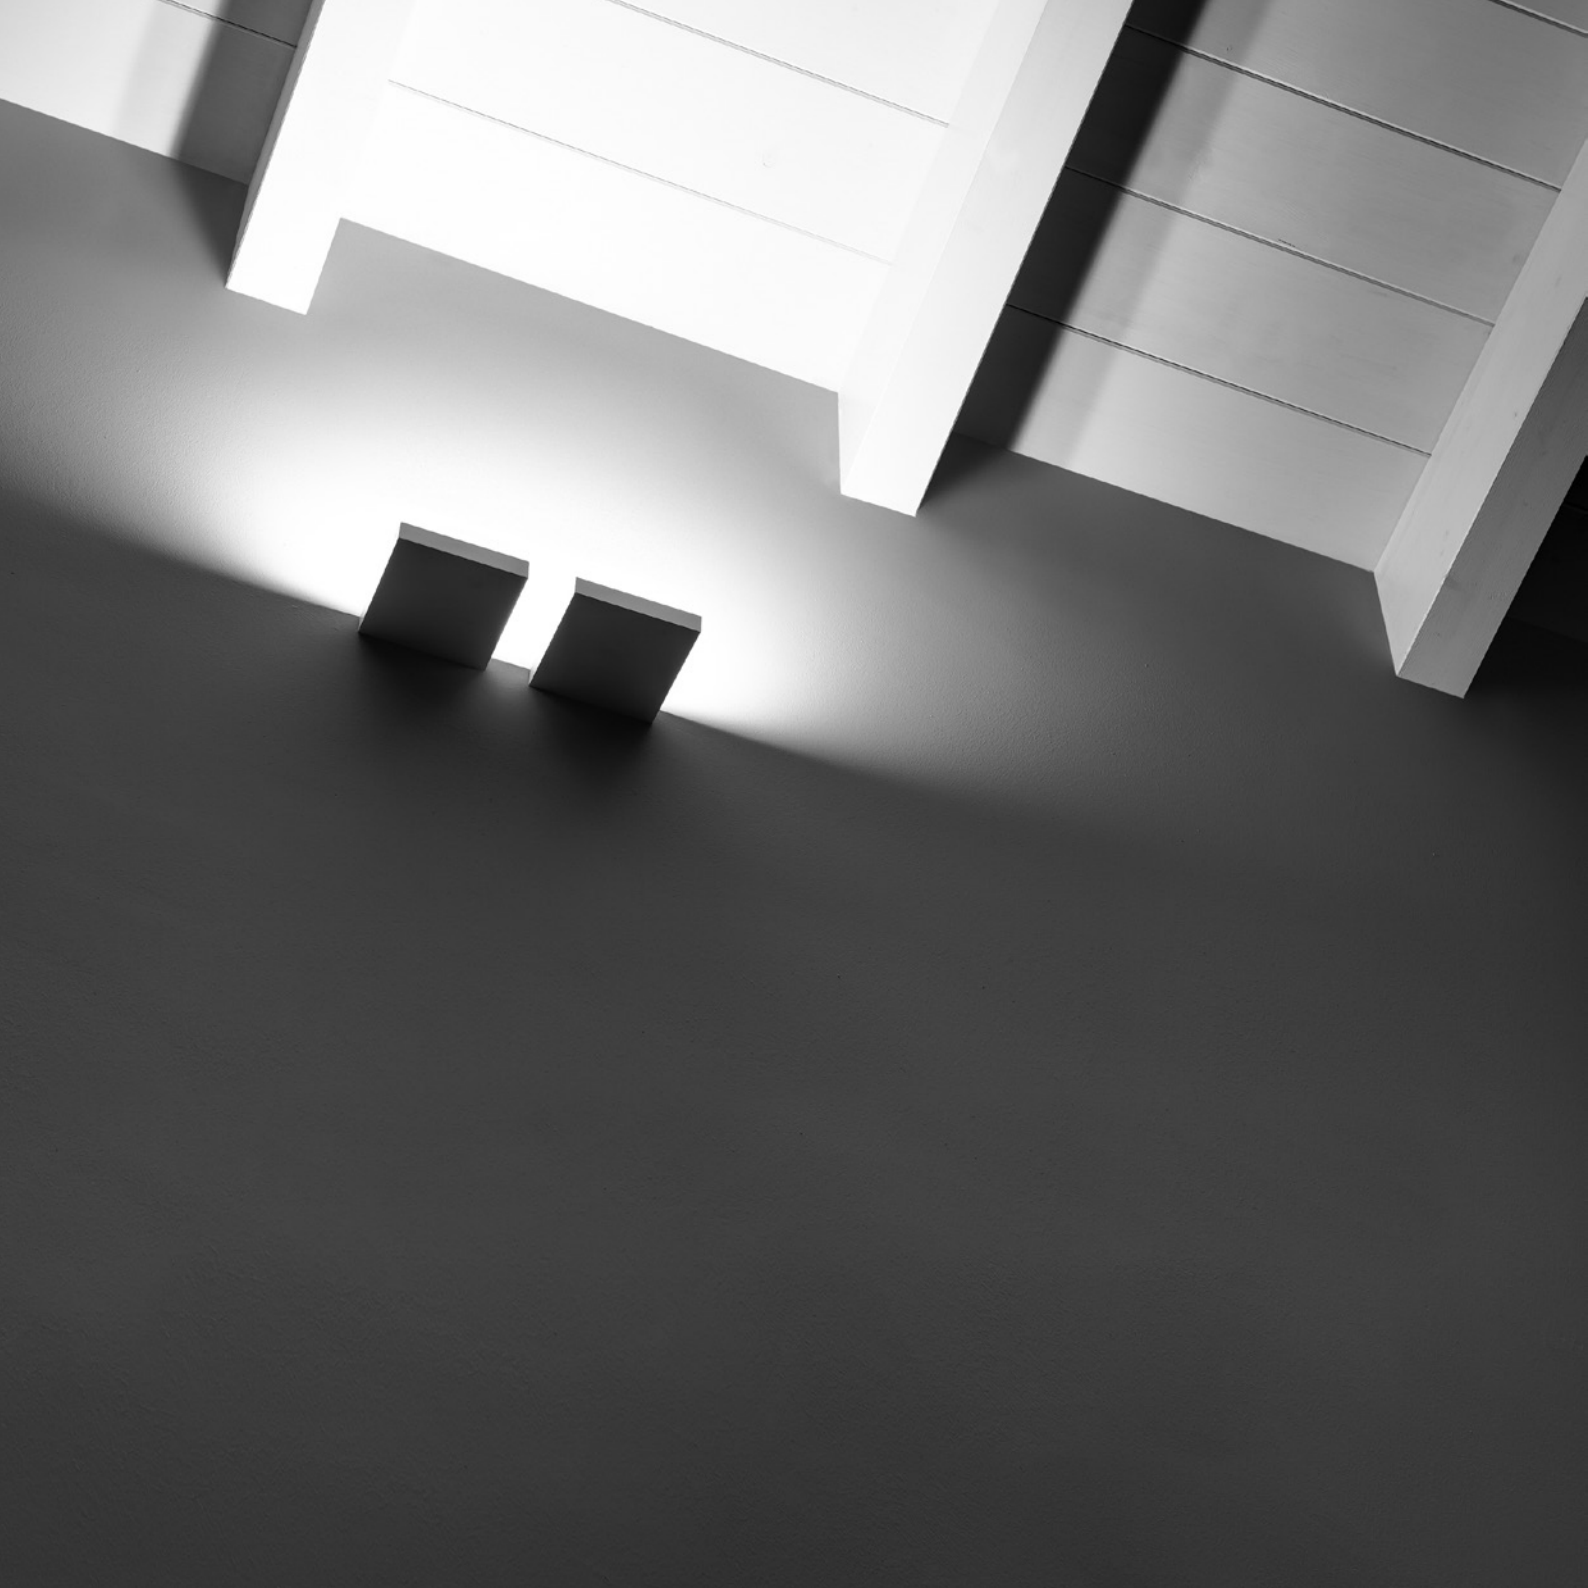


## SOL 1

Omar Carraglia - Davide Groppi / 2003

A tool to light.


The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Wall / Indirect / Indoor			
Material	Metal		
Finish	.03 Matt White	.04	Matt Black
Note	Wall luminaire.		



**SOL 1**  
12,5W  
220-230V - 50/60Hz  
2700K - 836lm / 3000K - 899lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT	1A3130300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3130300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3130400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3130400.30.02

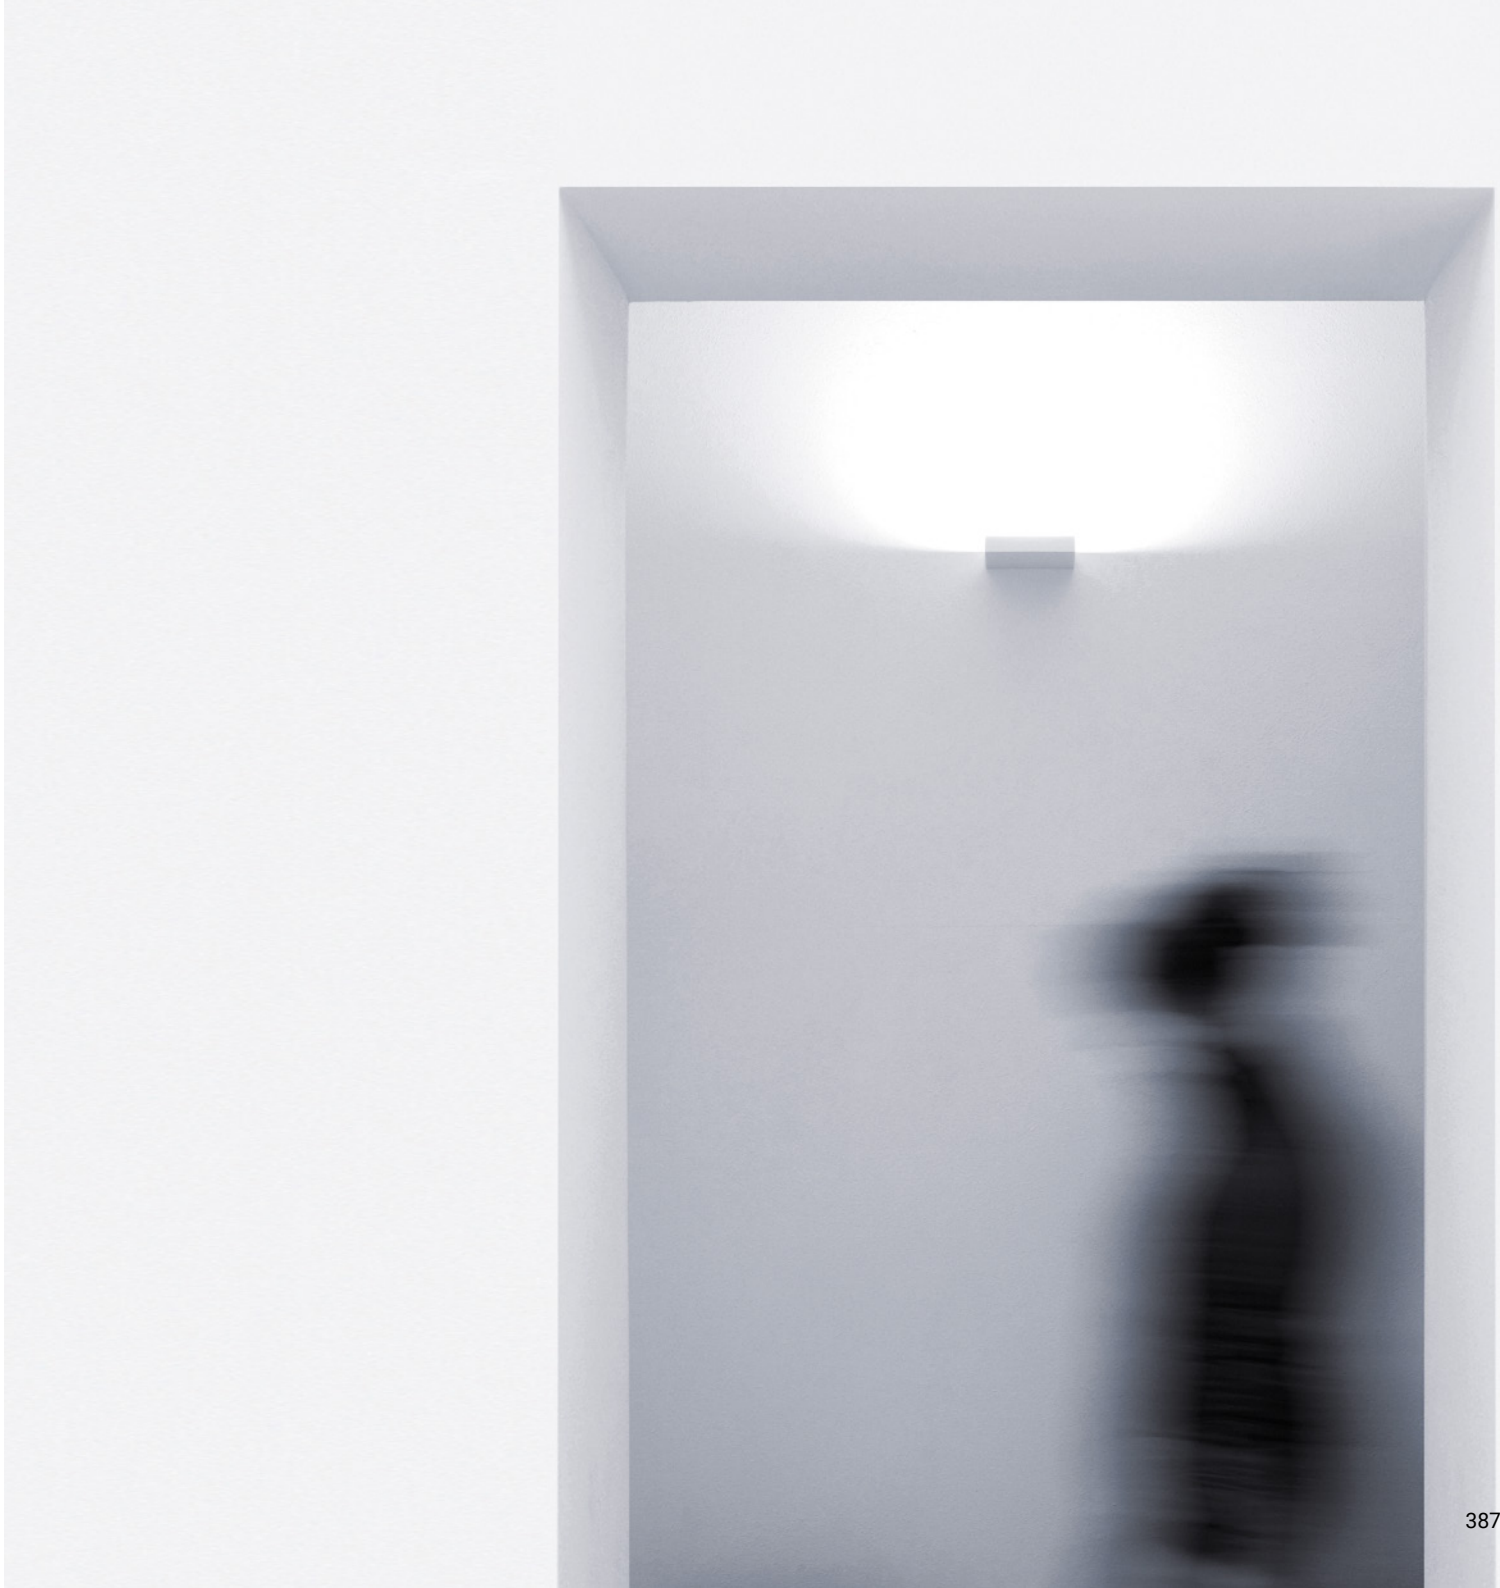






## SOL 2

/ 2008

A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Wall / Indirect / Indoor			
Material	Metal		
Finish	.03 Matt White	.04	Matt Black
Note	Wall luminaire.		



**SOL 2**  
24,5W  
220-230V - 50/60Hz  
2700K - 1681lm / 3000K - 1808lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT  
Matt Black - 2700K - TRIAC/IGBT  
Matt Black - 3000K - TRIAC/IGBT


1A3140300.27.02  
1A3140300.30.02  
1A3140400.27.02  
1A3140400.30.02





A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.  
Luminaire available also in ENDLESS version.


Wall-Ceiling / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold
Note	Wall luminaire. Adjustable in all directions. SPOT ENDLESS and SPOT		
	ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.		



**SPOT**  
Max 21W  
220-240V - 50/60Hz  
Driver integrated  
DALI  
LED module not included  
CE IP20

- Matt White - DALI
- Matt Black - DALI
- Matt Black/Polished Gold - DALI


1A1080300.00.01  
1A1080400.00.01  
1A1084900.00.01



**SPOT**  
Max 21W  
220-240V - 50/60Hz  
Driver integrated  
PUSH  
LED module not included  
CE IP20

- Matt White - PUSH
- Matt Black - PUSH
- Matt Black/Polished Gold - PUSH


1A1080300.00.04  
1A1080400.00.04  
1A1084900.00.04



**SPOT ENDLESS**  
ENDLESS version only  
Max 13W - Max 0,34A  
48V DC  
Driver not included  
See page ENDLESS  
LED module not included  
CE IP20 TE

- Matt White
- Matt Black
- Matt Black/Polished Gold

1A1080300.00.40  
1A1080400.00.40  
1A1084900.00.40



**SPOT ENDLESS CASAMBI**  
ENDLESS version only  
Max 15,5W - Max 0,4A  
48V DC  
Driver not included  
See page ENDLESS  
LED module not included  
CE IP20 TE A

- Matt White
- Matt Black
- Matt Black/Polished Gold

1A1080300.00.41  
1A1080400.00.41  
1A1084900.00.41



Compulsory accessories

LED modules



DG111 LED module		Not included	
	16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A4700000.27.20
	16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable		1A4700000.30.20



DG111 LED module		Not included	
	16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A3890000.27.20
	16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable		1A3890000.30.20



DG111 LED module		Not included	
	16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A3900000.27.20
	16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable		1A3900000.30.20



DG111 LED module		Not included	
	11,7W - 15° - 350mA DC 2700K - 1336lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A4700000.27.20
	11,7W - 15° - 350mA DC 3000K - 1364lm - CRI >90 Energy Efficiency F - Dimmable		1A4700000.30.20



DG111 LED module		Not included	
	11,7W - 22° - 350mA DC 2700K - 1322lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A3890000.27.20
	11,7W - 22° - 350mA DC 3000K - 1382lm - CRI >90 Energy Efficiency F - Dimmable		1A3890000.30.20



DG111 LED module		Not included	
	11,7W - 36° - 350mA DC 2700K - 1275lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A3900000.27.20
	11,7W - 36° - 350mA DC 3000K - 1343lm - CRI >90 Energy Efficiency F - Dimmable		1A3900000.30.20

Optional accessories

Other accessories



Accessory holder + Soft filter + Honeycomb louvre		Not included	
	Matt Black		1X0070400.04.00



Accessory holder + Elliptical filter		Not included	
	Matt Black		1X0070400.05.00




Blue filter		Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00		1X0070000.06.00




Red filter		Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00		1X0070000.07.00



Yellow filter		Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00		1X0070000.08.00



Directional fins		Not included	
	Matt Black		1X0070400.01.00



Cylindrical screen		Not included	
	Matt Black		1X0070400.02.00



Cone 45°		Not included	
	Matt Black		1X0070400.03.00





## TOAST

Davide Groppi - Alberto Zattin / 2001




The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.



TOAST

Davide Groppi - Alberto Zattin / 2001

Wall / Diffuse / Indoor				
Material	Glass - Metal			
Finish	.01 Polished Chrome	.03 Matt White	.04 Matt Black	.08 Brushed Brass
	.14 Brushed Chrome			
Note	Wall luminaire. Dual emission.			




TOAST

Max 100W - R7s  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included

CE IP20 0,5 m

Polished Chrome - ON/OFF  
Matt White - ON/OFF  
Matt Black - ON/OFF  
Brushed Brass - ON/OFF  
Brushed Chrome - ON/OFF

1A3290100.00.00  
1A3290300.00.00  
1A3290400.00.00  
1A3290800.00.00  
1A3291400.00.00



TOAST LED

12W  
100-240V - 50/60Hz  
2700K - 743lm / 3000K - 743lm  
CRI >90  
Driver integrated

ON/OFF

CE IP20

Polished Chrome - 2700K - ON/OFF  
Polished Chrome - 3000K - ON/OFF  
Matt White - 2700K - ON/OFF  
Matt White - 3000K - ON/OFF  
Matt Black - 2700K - ON/OFF  
Matt Black - 3000K - ON/OFF  
Brushed Brass - 2700K - ON/OFF  
Brushed Brass - 3000K - ON/OFF  
Brushed Chrome - 2700K - ON/OFF  
Brushed Chrome - 3000K - ON/OFF

1A3280100.27.00  
1A3280100.30.00  
1A3280300.27.00  
1A3280300.30.00  
1A3280400.27.00  
1A3280400.30.00  
1A3280800.27.00  
1A3280800.30.00  
1A3281400.27.00  
1A3281400.30.00

Optional accessories

Bulbs		
	LED - R7s COB - 78 mm	Not included
	220-240V - 4W - 330°	1Y0000138
	3000K - 450lm - CRI >80	
	Energy Efficiency E	





Private Residence  
Montecarlo






## VICEVERSA

Davide Groppi / 2024

A simple and elegant wall lamp.  
The light is projected both upwards and downwards,  
offering incredible lightness to the design.

Wall / Diffuse / Indoor				
Material	Metal			
Finish	.03 Matt White	.39 Matt White/Polished Gold	.49 Matt Black/Polished Gold	
Note	Wall-mounted luminaire. Dual emission.			




VICEVERSA

28W  
110-240V - 50/60Hz  
2700K - Up 3000lm - Down 140lm /  
3000K - Up 3200lm - Down 144lm  
CRI >90  
Driver integrated  
DALI  
C E IP20

Matt White - 2700K - DALI  
Matt White - 3000K - DALI  
Matt White/Polished Gold - 2700K - DALI  
Matt White/Polished Gold - 3000K - DALI  
Matt Black/Polished Gold - 2700K - DALI  
Matt Black/Polished Gold - 3000K - DALI

1A5310300.27.01  
1A5310300.30.01  
1A5313900.27.01  
1A5313900.30.01  
1A5314900.27.01  
1A5314900.30.01




VICEVERSA

28W  
110-240V - 50/60Hz  
2700K - Up 3000lm - Down 140lm /  
3000K - Up 3200lm - Down 144lm  
CRI >90  
Driver integrated  
PUSH  
C E IP20

Matt White - 2700K - PUSH  
Matt White - 3000K - PUSH  
Matt White/Polished Gold - 2700K - PUSH  
Matt White/Polished Gold - 3000K - PUSH  
Matt Black/Polished Gold - 2700K - PUSH  
Matt Black/Polished Gold - 3000K - PUSH

1A5310300.27.04  
1A5310300.30.04  
1A5313900.27.04  
1A5313900.30.04  
1A5314900.27.04  
1A5314900.30.04




VICEVERSA

28W  
110-240V - 50/60Hz  
2700K - Up 3000lm - Down 140lm /  
3000K - Up 3200lm - Down 144lm  
CRI >90  
Driver integrated  
1-10V  
C E IP20

Matt White - 2700K - 1-10V  
Matt White - 3000K - 1-10V  
Matt White/Polished Gold - 2700K - 1-10V  
Matt White/Polished Gold - 3000K - 1-10V  
Matt Black/Polished Gold - 2700K - 1-10V  
Matt Black/Polished Gold - 3000K - 1-10V

1A5310300.27.03  
1A5310300.30.03  
1A5313900.27.03  
1A5313900.30.03  
1A5314900.27.03  
1A5314900.30.03



VICEVERSA

28W  
110-240V - 50/60Hz  
2700K - Up 3000lm - Down 140lm /  
3000K - Up 3200lm - Down 144lm  
CRI >90  
Driver integrated  
TRIAC/IGBT  
C E IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT  
Matt White/Polished Gold - 2700K - TRIAC/IGBT  
Matt White/Polished Gold - 3000K - TRIAC/IGBT  
Matt Black/Polished Gold - 2700K - TRIAC/IGBT  
Matt Black/Polished Gold - 3000K - TRIAC/IGBT

1A5310300.27.02  
1A5310300.30.02  
1A5313900.27.02  
1A5313900.30.02  
1A5314900.27.02  
1A5314900.30.02





**CEILING**



## ASINTOTO

Davide Groppi / 2023

Abstraction, purity, graphic sign.  
The projected reduction of Infinito.

The disc appears enigmatic, the symbolic presence of the absence of light.

ASINTOTO

Davide Groppi / 2023

Ceiling / Indirect / Indoor

Material


Metal - Methacrylate

Finish

.27 Gravity Black

Note

Ceiling luminaire. Disc with Gravity Black finish. Magnetic weight available for disc tilting. Black cable.



ASINTOTO

18W

Max 500mA DC

2700K - 1435lm / 3000K - 1481lm

CRI >90

Driver not included

CE IP20




Gravity Black - 2700K

Gravity Black - 3000K

1A4072700.27.20

1A4072700.30.20

Compulsory accessories


Drivers		<div>Driver</div> <div>220-240V(100-127V) 500mA/20W(15W)/IP20/DALI</div>	Not included	1Z0241180.500
		<div>Driver</div> <div>220-240V(100-127V) 500mA/20W(15W)/IP20/PUSH - 1-10V</div>	Not included	1Z0240870.500
		<div>Driver</div> <div>220-240V 500mA/20W/IP20/TRIAC/IGBT</div>	Not included	1Z0240850.500

Davide Groppi / 2023


ASINTOTO

Optional accessories

Installation kits




Circular plasterboard panel 12,5 mm		Not included
Standard	Cut-out 400x400 mm Minimum space for mounting 115 mm	1A4520000.00.00




Remote clamp for electrical cable		Not included
Standard		1X0110000.01.00


Suspension kits



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00




Ceiling suspension kit		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00




Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Other accessories



Magnetic weight		Not included
Matt Black	For sloped installation	1A4710400.00.00


417





# AURORA

Davide Groppi / 2023

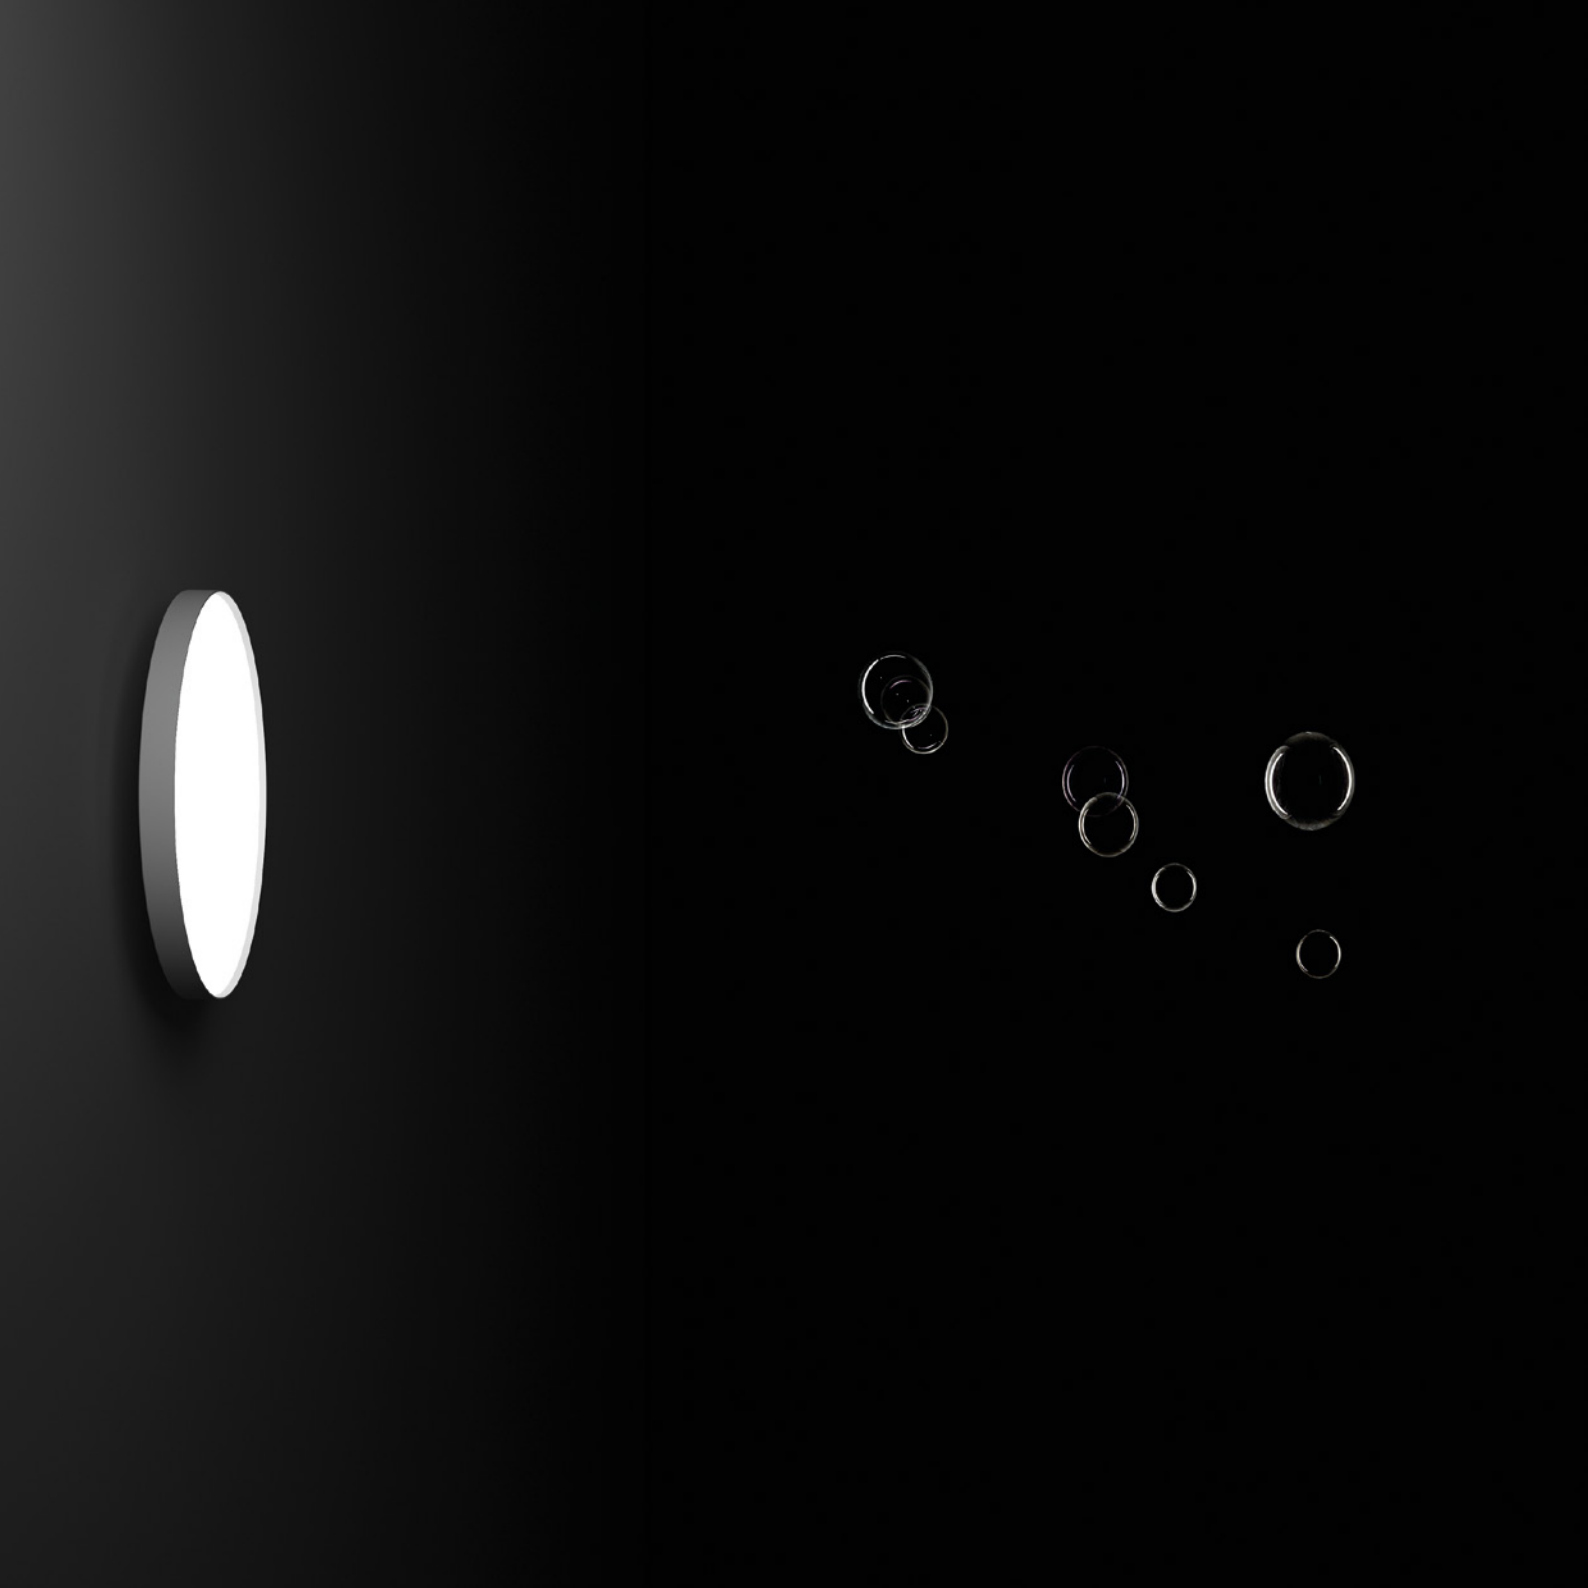


A white disc, the perfect representation of diffused light.  
It can be mounted on the wall or ceiling, with modular brightness.

AURORA

Davide Groppi / 2023

Ceiling-Wall / Diffuse / Indoor				
Material	Metal - PMMA			
Finish	.03 Matt White	.04 Matt Black	.32 Copper Oxide	
Note	Wall and ceiling luminaire. Matt white diffuser.			



AURORA

28W  
110-240V - 50/60Hz  
3000K - 2700lm  
CRI >80  
Driver integrated  
DALI - PUSH - 1-10V  
CE IP20

Matt White - 3000K - DALI - PUSH - 1-10V	1A4010300.30.07
Matt Black - 3000K - DALI - PUSH - 1-10V	1A4010400.30.07
Copper Oxide - 3000K - DALI - PUSH - 1-10V	1A4013200.30.07



**Spazio Davide Groppi**  
Madrid

## DOT PL 51

Omar Carraglia - Davide Groppi / 2015




A tool to light.

A luminaire designed for use with state-of-the-art LED bulbs to offer superior performance and a wide range of light beams.



Ceiling / Direct / Indoor	
Material	Metal
Finish	.03 Matt White
Note	Ceiling luminaire.




**DOT PL 51**  
Max 10W - GU10  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
CE IP20

Matt White - ON/OFF


1A3800300.00.00

**Optional accessories**


Bulbs



LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010


Other accessories



Darklight	Not included
LED SORAA - GU10 - MR16	1Y1580040



25° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580020



36° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580030

Cracco Restaurant  
Milano



## HAKO PL

Alberto Zattin / 2000



A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.



HAKO PL

Alberto Zattin / 2000

Ceiling / Diffuse / Indoor

Material


Metal - Methacrylate

Finish

.03 Matt White

Note

Ceiling luminaire. Sanded glass diffuser.



**HAKO PL**  
12,5W  
220-230V - 50/60Hz  
2700K - 593lm / 3000K - 638lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT	1A3160300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3160300.30.02









The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Ceiling / Direct / Indoor		
Material	Metal	
Finish	.03 Matt White	.34 Matt White/Black Bicolor
Note	Ceiling luminaire. Adjustable in all directions.	


	<b>MINI PL 51</b> Max 10W - GU10 100-240V - 50/60Hz ON/OFF Bulb not included CE IP20	Matt White - ON/OFF Matt White/Black Bicolor - ON/OFF	1A3450300.00.00 1A3453400.00.00
---	---	--	------------------------------------

Optional accessories


Bulbs



LED - GU10 - PAR16		Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500	




LED SORAA - GU10 - MR16		Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210	




LED SORAA - GU10 - MR16		Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010	


Other accessories



Darklight		Not included
LED SORAA - GU10 - MR16	1Y1580040	



25° beam filter		Not included
LED SORAA - GU10 - MR16	1Y1580020	



36° beam filter		Not included
LED SORAA - GU10 - MR16	1Y1580030	



## NULLA PL

Davide Groppi / 2014

The marvellous Nulla project, also available in a surface mounted version.

NULLA PL

Ceiling / Direct / Indoor

Material

Metal


Finish

.03 Matt White

Note

Ceiling luminaire. Visible 18 mm diameter hole.

Davide Groppi / 2014



**NULLA PL**  
8,5W  
100-240V - 50/60Hz  
2700K - 460lm / 3000K - 495lm  
CRI >90  
Driver integrated  
ON/OFF  
C E IP20

Matt White - 2700K - ON/OFF	1A2500300.27.00
Matt White - 3000K - ON/OFF	1A2500300.30.00







A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Ceiling / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.34	Matt White/Black Bicolor
Note	Ceiling luminaire. Adjustable in all directions.		



PUNTO PL

Max 21W  
100-240V - 50/60Hz  
Driver integrated  
PUSH  
LED module not included



Matt White - PUSH  
Matt White/Black Bicolor - PUSH

1A1110300.00.04  
1A1113400.00.04

Compulsory accessories

LED modules



DG111 LED module		Not included
16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.27.20	
16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.30.20	



DG111 LED module		Not included
16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20	
16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20	



DG111 LED module		Not included
16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20	
16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20	

Optional accessories

Other accessories



Accessory holder + Soft filter + Honeycomb louvre		Not included
Matt Black	1X0070400.04.00	



Accessory holder + Elliptical filter		Not included
Matt Black	1X0070400.05.00	



Blue filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



Red filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



Yellow filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00

**PUNTO 2 PL**


/ 2004



A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Ceiling / Direct / Indoor		
Material	Metal	
Finish	.03 Matt White	.34 Matt White/Black Bicolor
Note	Ceiling luminaire. Adjustable in all directions.	



**PUNTO 2 PL**  
Max 2x21W  
100-240V - 50/60Hz  
Driver integrated  
PUSH  
LED modules not included  
CE IP20

Matt White - PUSH  
Matt White/Black Bicolor - PUSH

1A1120300.00.04  
1A1123400.00.04

Compulsory accessories

LED modules		
	DG111 LED module	Not included
	16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.27.20
	16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.30.20
	DG111 LED module	Not included
	16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20
	16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20
	DG111 LED module	Not included
	16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20
	16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20

Optional accessories

Other accessories		
	Accessory holder + Soft filter + Honeycomb louvre	Not included
	Matt Black	1X0070400.04.00
	Accessory holder + Elliptical filter	Not included
	Matt Black	1X0070400.05.00
	Blue filter	Not included
	Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00 1X0070000.06.00
	Red filter	Not included
	Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00 1X0070000.07.00
	Yellow filter	Not included
	Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00 1X0070000.08.00





**SANMARTINO**

Omar Carraglia - Davide Groppi / 2014

Where did the chandelier go?  
A work about absence. About something missing.  
As if by removing the chandelier, its memory stays, but with a modern and sensual light.

SANMARTINO

Omar Carraglia - Davide Groppi / 2014

Ceiling / Direct / Indoor		
Material	Metal	
Finish	.03 Matt White	.15 Natural Brass
Note	Ceiling luminaire. Visible 18 mm diameter hole.	



SANMARTINO

8,5W  
100-240V - 50/60Hz  
3000K - 375lm  
CRI >90  
Driver integrated  
ON/OFF  
C E IP20

Matt White - 3000K - ON/OFF  
Natural Brass - 3000K - ON/OFF

1A3420300.30.00  
1A3421500.30.00






## TRICK TRACK

/ 2016

A simple, graphic solution.  
Bringing accent lighting with an external wiring system.

Wall-Ceiling / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.04	Matt Black
Note	Ceiling luminaire. Adjustable in all directions. White cable (2 m) for the matt white finish. Black cable (2 m) for the matt black finish. Connects max 20 lamps.		

	<b>TRICK TRACK</b> Max 10W - GU10 100-240V - 50/60Hz ON/OFF Bulb not included CE IP20	Matt White - ON/OFF Matt Black - ON/OFF	1A3430300.00.00 1A3430400.00.00
---	--	--	------------------------------------

Optional accessories

Installation kits



Wall and ceiling rose	Not included
Matt White	1X0030300.01.00
Matt Black	1X0030400.01.00

Bulbs



LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010


Other accessories



Darklight	Not included
LED SORAA - GU10 - MR16	1Y1580040



25° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580020



36° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580030



**RECESSED**

## DOT R


Omar Carraglia - Davide Groppi / 2015



A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Recessed / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold
Note	Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40 mm. Minimum space for recessed installation: 60 mm.		




DOT R

13W  
Max 350mA DC  
2700K / 3000K  
CRI >97  
Driver not included



Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K  
Matt Black/Polished Gold - 2700K  
Matt Black/Polished Gold - 3000K

1A4770300.27.20  
1A4770300.30.20  
1A4770400.27.20  
1A4770400.30.20  
1A4774900.27.20  
1A4774900.30.20



DOT R 51

Max 10W - GU10  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included




Matt White - ON/OFF  
Matt Black - ON/OFF  
Matt Black/Polished Gold - ON/OFF


1A3700300.00.00  
1A3700400.00.00  
1A3704900.00.00

Compulsory accessories


Drivers



Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	DOT R	1Z0241180.350	



Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	DOT R	1Z0240870.350	



Driver				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	DOT R	1Z0240850.350	


Other accessories




Lens				Not included
Beam - 14°	2700K - CRI >97 - 983lm	DOT R	1A3090000.00.00	
	3000K - CRI >97 - 1038lm			
Beam - 24°	2700K - CRI >97 - 943lm	DOT R	1A3100000.00.00	
	3000K - CRI >97 - 996lm			
Beam - 36°	2700K - CRI >97 - 955lm	DOT R	1A3110000.00.00	
	3000K - CRI >97 - 1005lm			
Beam - 50°	2700K - CRI >97 - 965lm	DOT R	1A3120000.00.00	
	3000K - CRI >97 - 1016lm			

Optional accessories


Other accessories




Accessory holder + Honeycomb louvre		Not included	
	DOT R	1X0080400.01.00	



Elliptical filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.02.00



Blue filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.03.00



Red filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.04.00



Yellow filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.05.00

Optional accessories

Bulbs



LED - GU10 - PAR16		Not included	
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT R 51	1Y0330500




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580210




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580010


Other accessories



Darklight		Not included	
	LED SORAA - GU10 - MR16	DOT R 51	1Y1580040



25° beam filter		Not included	
	LED SORAA - GU10 - MR16	DOT R 51	1Y1580020



36° beam filter		Not included	
	LED SORAA - GU10 - MR16	DOT R 51	1Y1580030





A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

## MINI 51

/ 2016

Recessed / Direct / Indoor

Material	Metal	
Finish	.03 Matt White	.04 Matt Black

**Note** Recessed luminaire. Adjustable in all directions. Plasterboard hole: 104x104 mm. Minimum space for recessed installation: 130 mm.



## MINI 51

Max 10W - GU10

100-240V - 50/60Hz

ON/OFF

Bulb not included



Matt White - ON/OFF

Matt Black - ON/OFF

1A0660300.00.00

1A0660400.00.00

## MINI 51

/ 2016

### Compulsory accessories

## Installation kits






## Optional accessories

## Bulbs



### Other accessories



Plasterboard frame 12,5 mm		Not included
Matt White	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500300.00.00
Matt Black	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500400.00.00

LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25°	1Y0330500
3000K - 375lm - CRI >97	
Energy Efficiency G - Dimmable	


LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10°	1Y1580210
2700K - 390lm - CRI >95	
Energy Efficiency G - Dimmable	

LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10°	1Y1580010
3000K - 410lm - CRI >95	
Energy Efficiency G - Dimmable	

Darklight		Not included
LED SORAA - GU10 - MR16	1Y1580040	

25° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580020



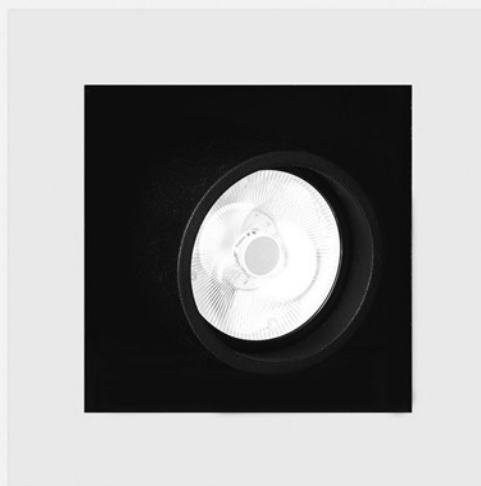

36° beam filter		Not included
LED SORAA - GU10 - MR16	1Y1580030	



A tool to light.


The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Recessed / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White .34 Matt White/Black Bicolor		
Note	Recessed luminaire. Adjustable in all directions. Plasterboard hole: 104x104 mm. Minimum space for recessed installation: 130 mm.		


	<b>MINI BIT 51</b>	
	Max 10W - GU10	
	100-240V - 50/60Hz	
	ON/OFF	
Bulb not included		
CE IP20    1.0 m		
Matt White - ON/OFF		1A0670300.00.00
Matt White/Black Bicolor - ON/OFF		1A0673400.00.00

Optional accessories


Bulbs



LED - GU10 - PAR16		Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500	




LED SORAA - GU10 - MR16		Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210	




LED SORAA - GU10 - MR16		Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010	


Other accessories



Darklight		Not included
LED SORAA - GU10 - MR16	1Y1580040	



25° beam filter		Not included
LED SORAA - GU10 - MR16	1Y1580020	




36° beam filter		Not included
LED SORAA - GU10 - MR16	1Y1580030	



**MIRA R**

Omar Carraglia / 2015

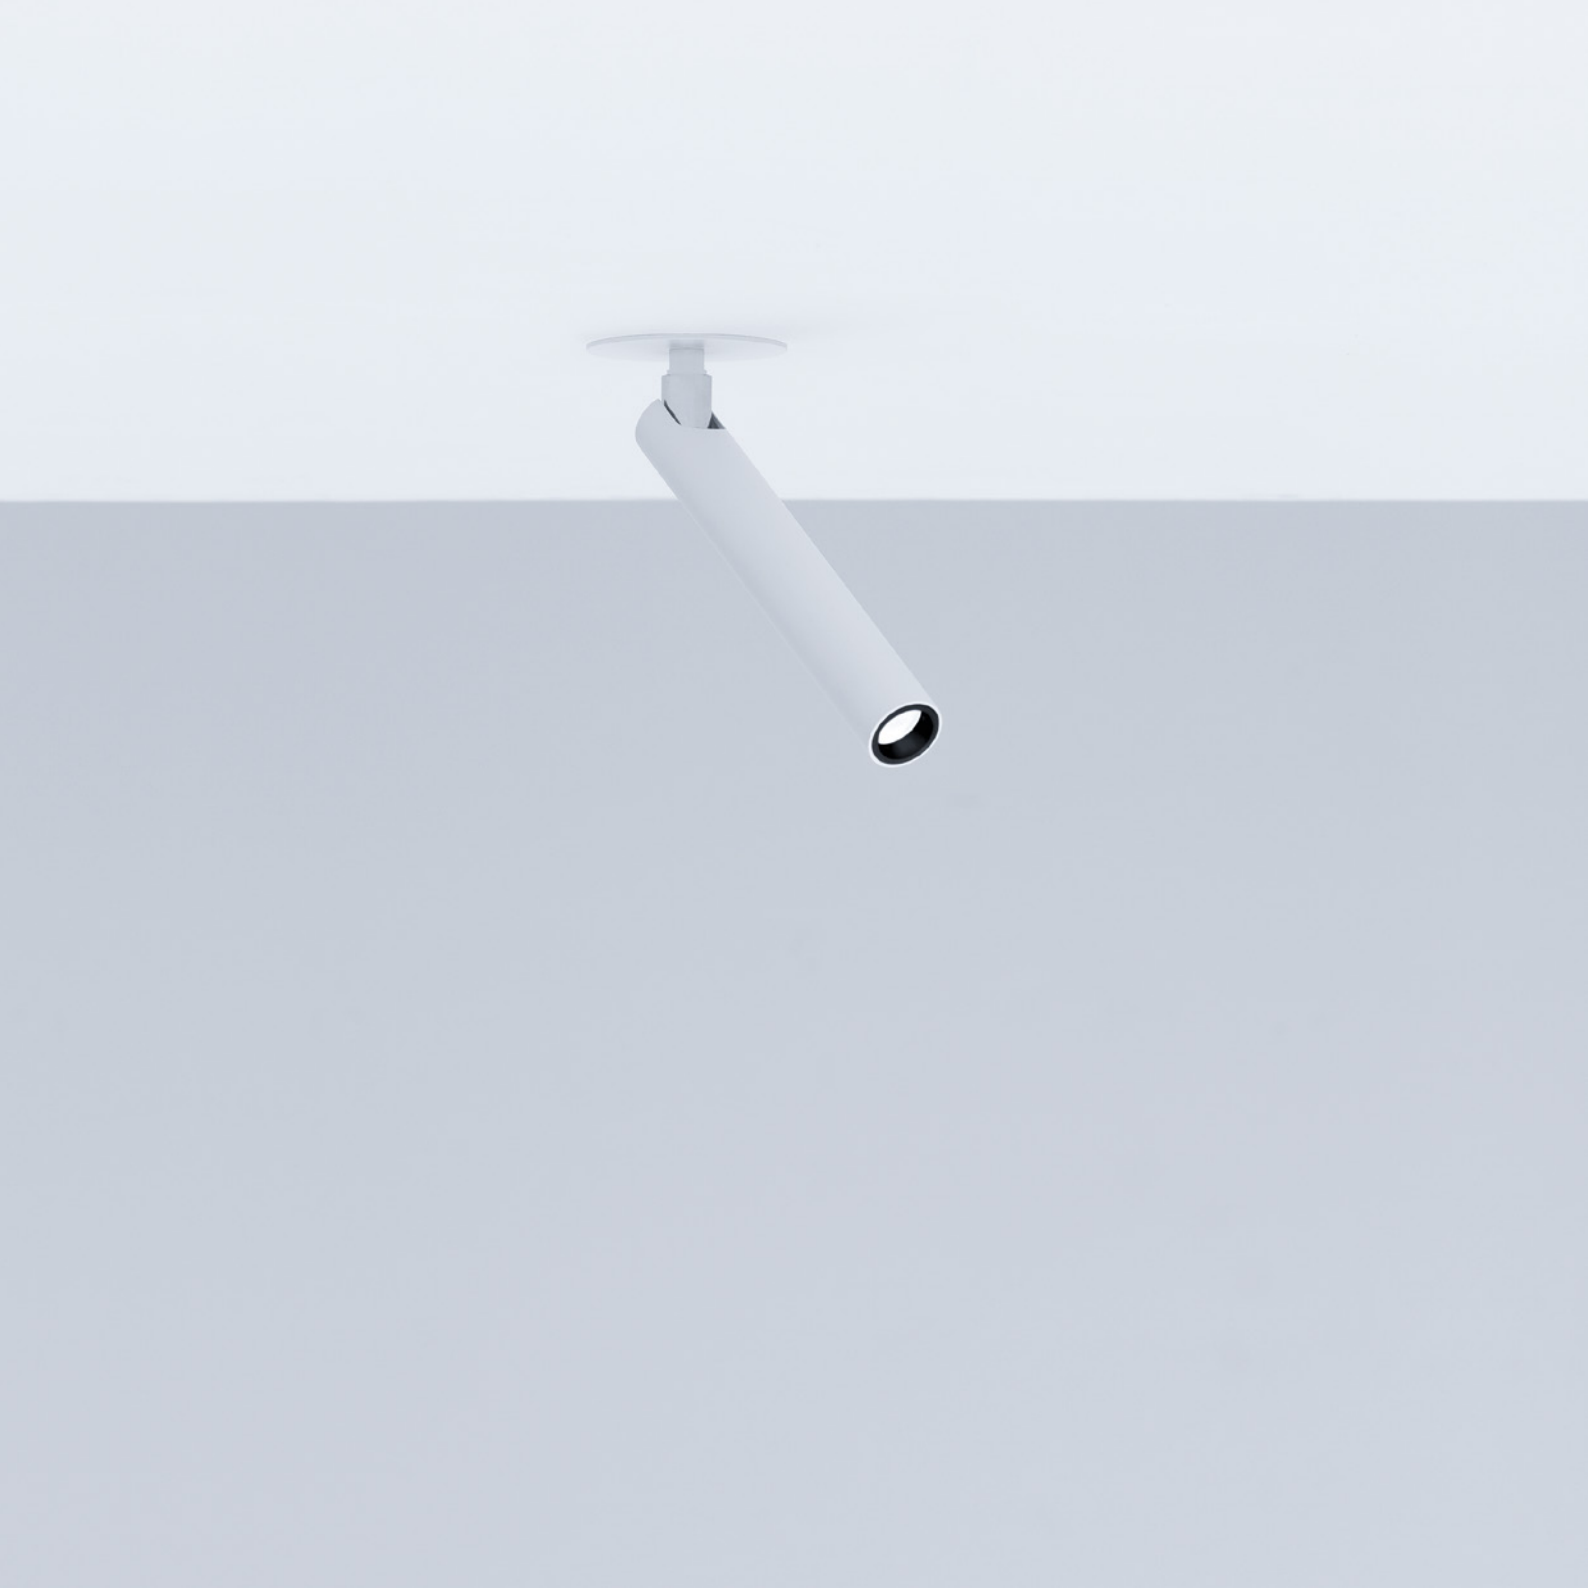

A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

MIRA R

Omar Carraglia / 2015

Recessed / Direct / Indoor

Material

Metal

Finish

.03

Matt White

.04


Matt Black

.49

Matt Black/Polished Gold

Note

Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40 mm. Minimum space for recessed installation: 60 mm.



MIRA R

5,6W

Max 500mA DC

2700K - 327lm / 3000K - 352lm

CRI >90

Driver not included

CE IP20

Matt White - 2700K

Matt White - 3000K

Matt Black - 2700K

Matt Black - 3000K

Matt Black/Polished Gold - 2700K

Matt Black/Polished Gold - 3000K

1A3690300.27.20

1A3690300.30.20

1A3690400.27.20


1A3690400.30.20

1A3694900.27.20

1A3694900.30.20

Compulsory accessories

Drivers




Driver

Not included

220-240V(100-127V)

500mA/20W(15W)/IP20/DALI

1Z0241180.500




Driver

Not included

220-240V(100-127V)

500mA/20W(15W)/IP20/PUSH - 1-10V

1Z0240870.500



Driver


Not included

220-240V

500mA/20W/IP20/TRIAC/IGBT

1Z0240850.500



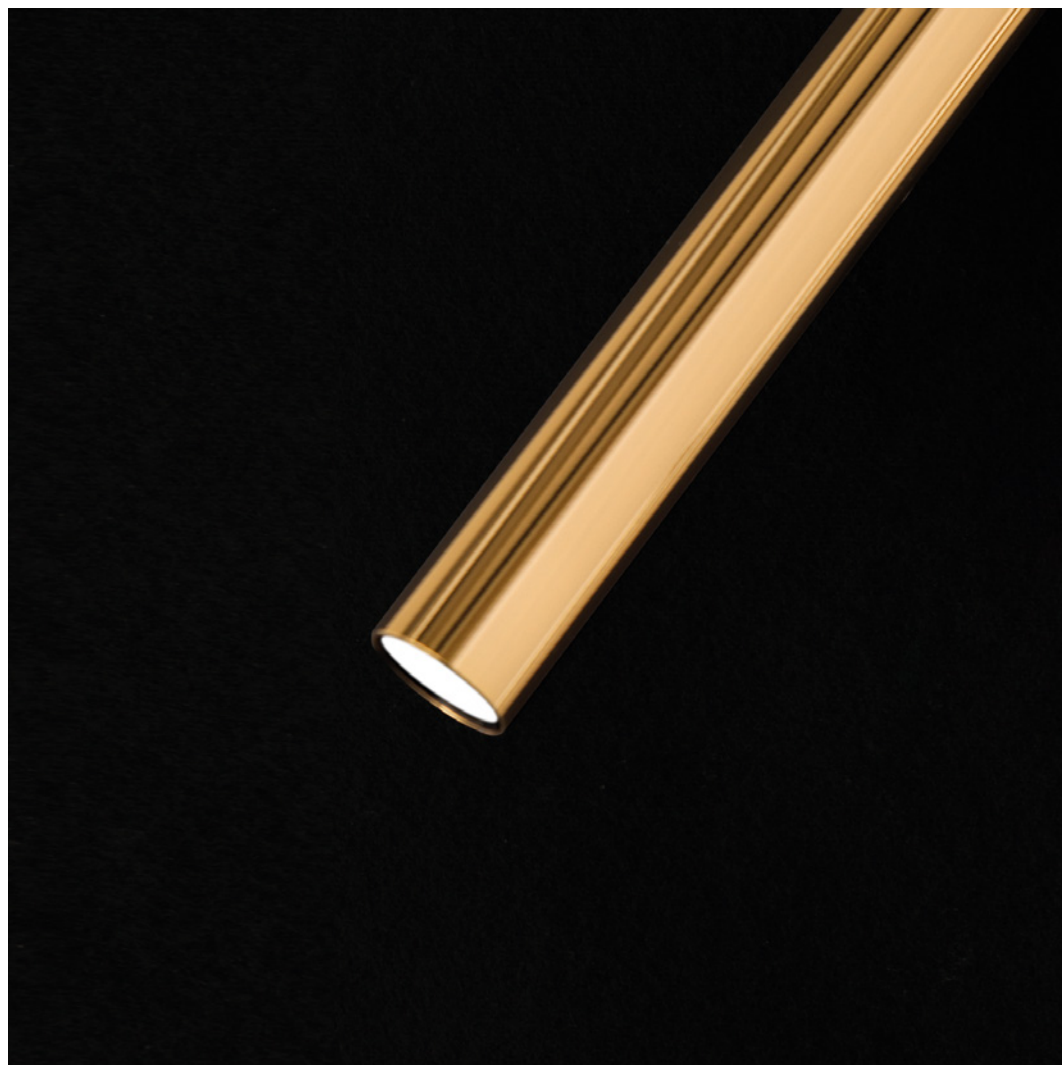





# NULLA

Davide Groppi / 2010

An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light. It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source.

It's the end in that every time we look at Nulla, we feel as though we can't get it better than that.

Nulla generates light and propagates mystery. Nulla is the most generous of our lamps.

Its sole objective is to hide and give all the attention to whatever it is lighting.

What we see is only a tiny black hole, as if it were drawn on the ceiling.


A circle in the ceiling hiding a very bright LED and lens to project the light.

**XXIII Compasso d'Oro ADI Award 2014**






Recessed / Direct / Indoor	
Material	Metal
Finish	.00 Standard
Note	Recessed luminaire. Visible 18 / 25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.



**NULLA - 23°**  
14W  
24V DC  
2700K - 347lm / 3000K - 357lm  
CRI >90  
Beam 23°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K	1A4100000.27.20
Standard - 3000K	1A4100000.30.20



**NULLA - 32°**  
14W  
24V DC  
2700K - 403lm / 3000K - 415lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K	1A2110000.27.20
Standard - 3000K	1A2110000.30.20



**NULLA 18 - 20°**  
4,5W  
24V DC  
2700K - 174lm / 3000K - 186lm  
CRI >90  
Beam 20°  
UGR <19  
Driver not included  
CE IP20

Standard - 2700K	1A2010000.27.20
Standard - 3000K	1A2010000.30.20



**NULLA 25 - 23°**  
9W  
24V DC  
2700K - 304lm / 3000K - 327lm  
CRI >90  
Beam 23°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K	1A4080000.27.20
Standard - 3000K	1A4080000.30.20



**NULLA 25 - 32°**  
9W  
24V DC  
2700K - 384lm / 3000K - 413lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP20/IP65


Standard - 2700K	1A2020000.27.20
Standard - 3000K	1A2020000.30.20

Compulsory accessories


Installation kits




Plasterboard flange 12,5 mm				Not included
Matt Black	Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00	




Plasterboard flange 12,5 mm				Not included
Matt Black	Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00	



Masonry Box				Not included
Standard		NULLA 18	1A2390000.00.00	



Concrete box				Not included
Standard		NULLA 18	1A2240000.00.00	



Plasterboard flange 12,5 mm				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00	




Plasterboard flange 12,5 mm				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A3980400.00.00	




Plasterboard flange (bottom) ≠ 12,5 mm				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A4960400.00.00	

Compulsory accessories




Masonry Box				Not included
Standard		NULLA 25	1A2380000.00.00	




Concrete box				Not included
Standard		NULLA 25	1A2230000.00.00	


Drivers



Driver				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI		1Z0241180.24	



Driver				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V		1Z0240870.24	




Driver				Not included
220-240V	24V/20W/IP20/TRIAC/IGBT		1Z0240850.24	

Optional accessories


Installation kits




Trapdoor for plasterboard 12,5 mm				Not included
Standard	Cut-out 205x205 mm	NULLA	1A3780000.00.00	




Trapdoor for plasterboard 12,5 mm				Not included
Standard	Cut-out 415x415 mm	NULLA	1A3790000.00.00	

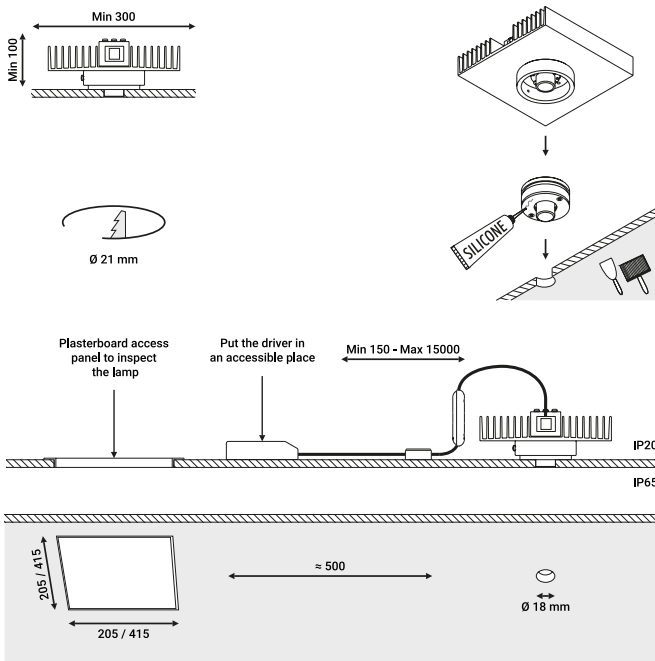


1A2200400.00.00 - NULLA installation conditions

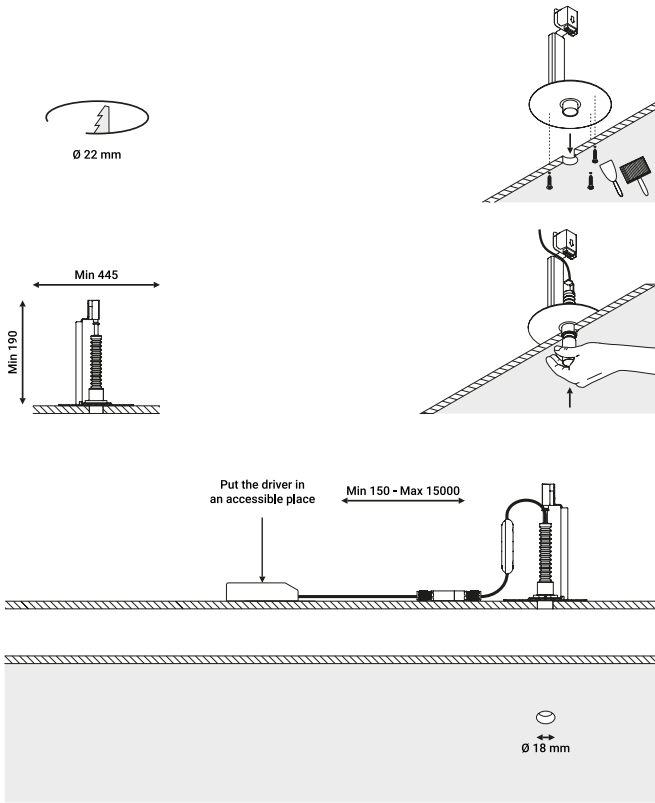

1A2210400.00.00 - NULLA 18 installation conditions

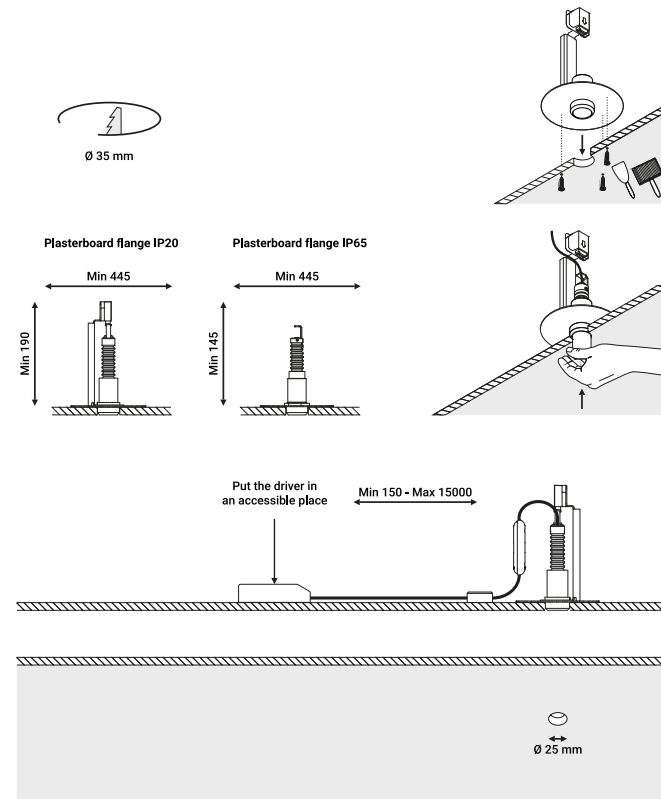



1A2170400.00.00 - 1A3980400.00.00 - NULLA 25 installation conditions

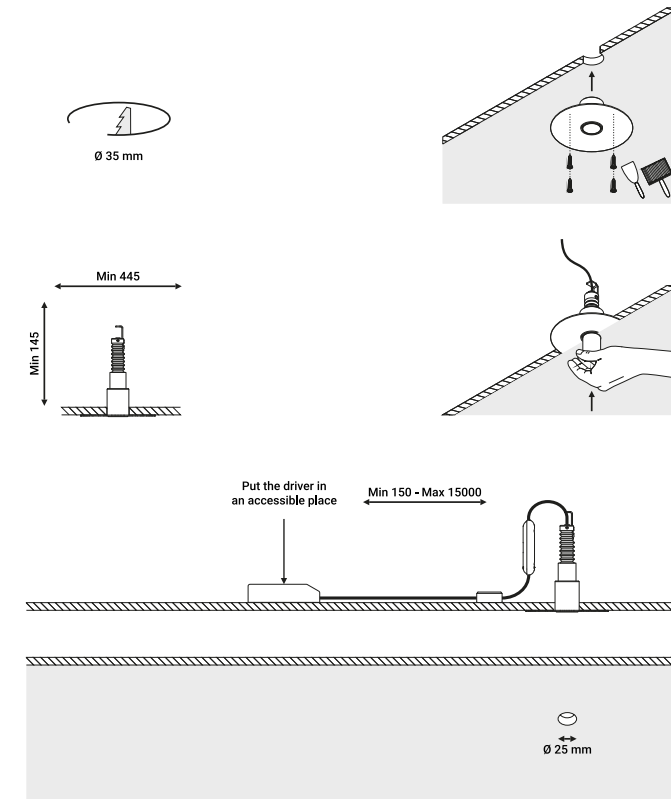

1A4960400.00.00 - NULLA 25 installation conditions



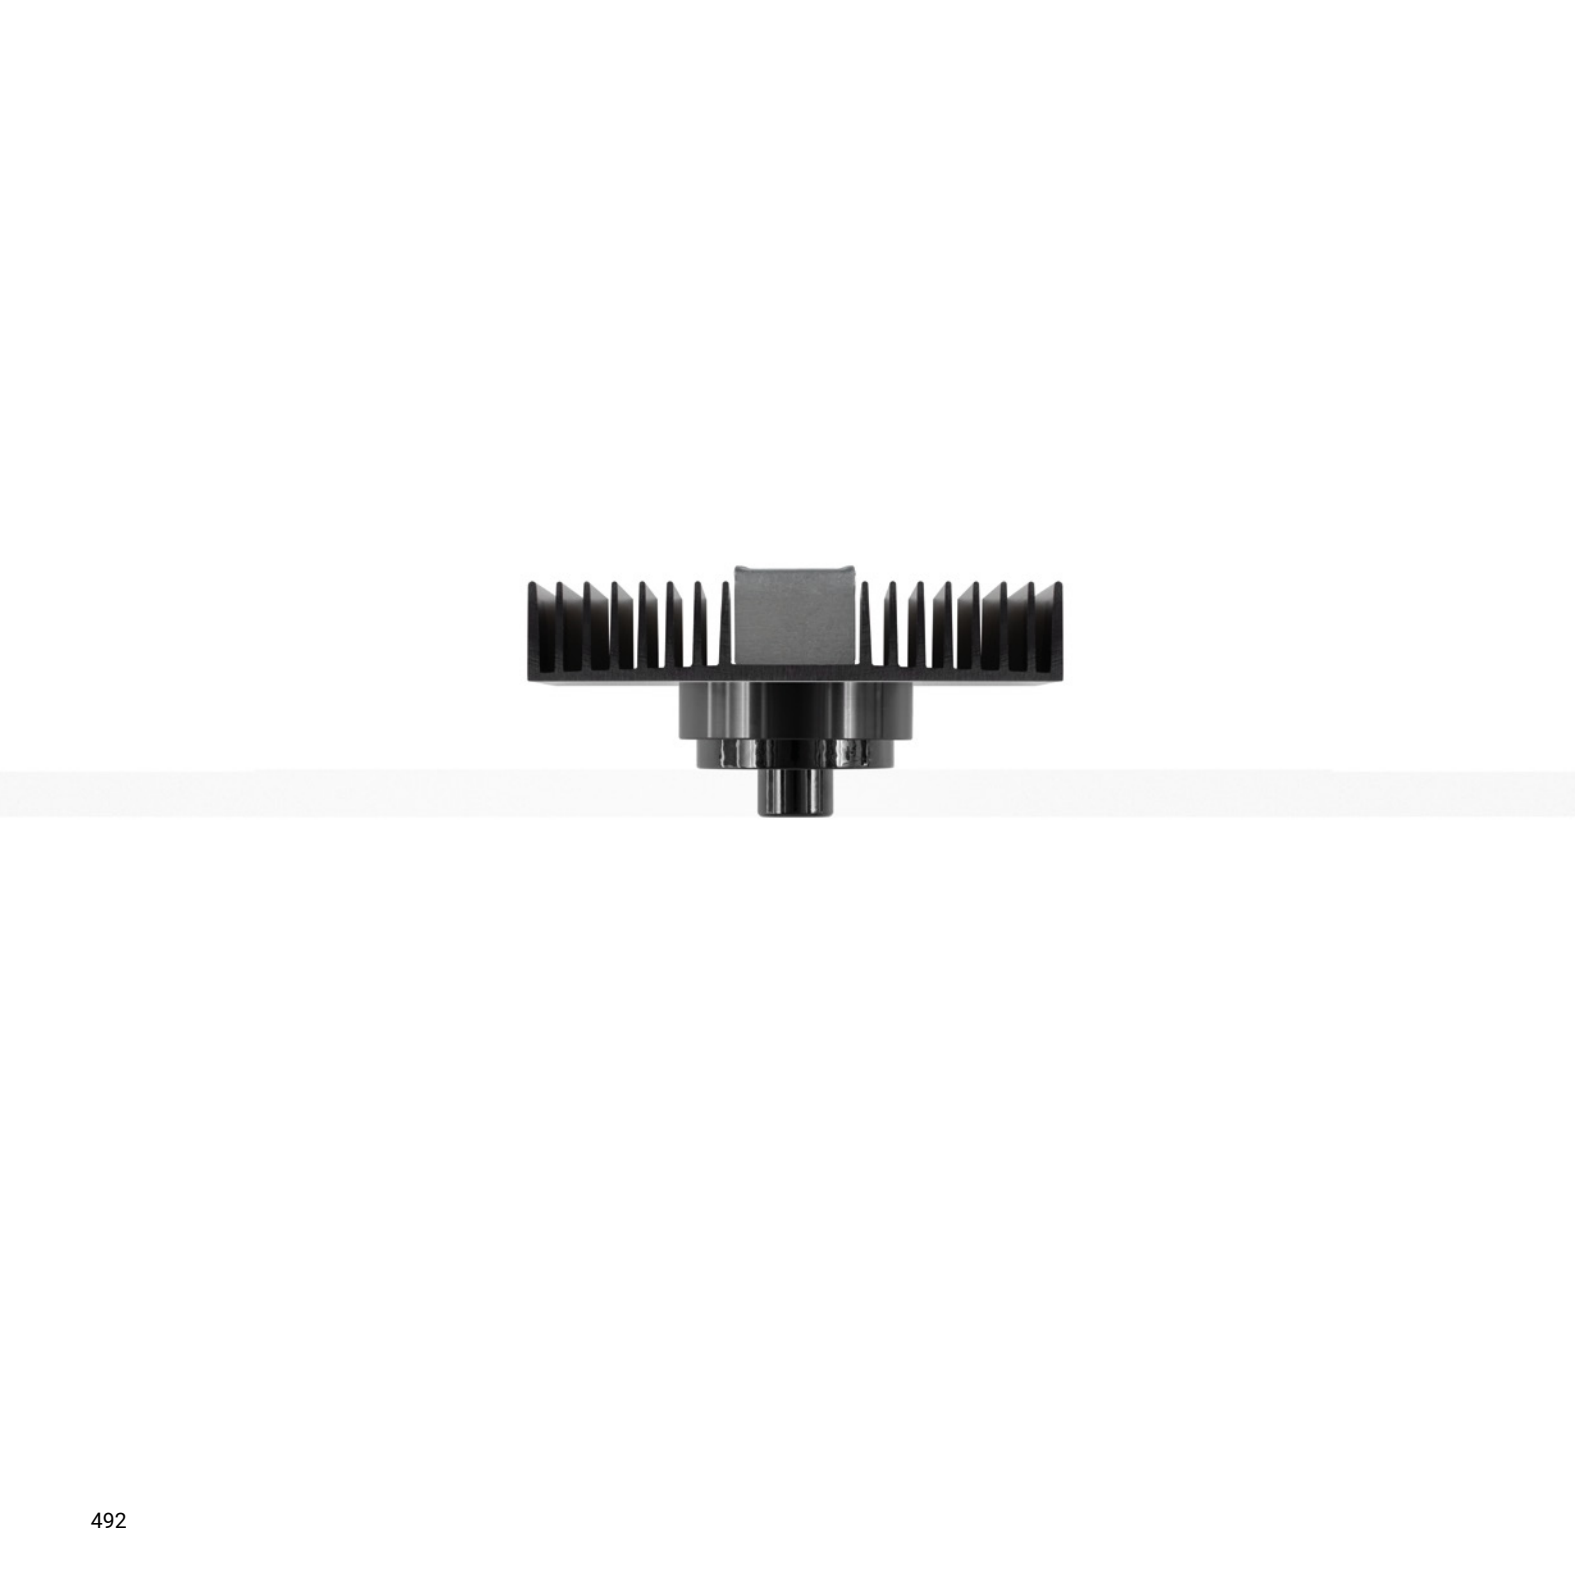

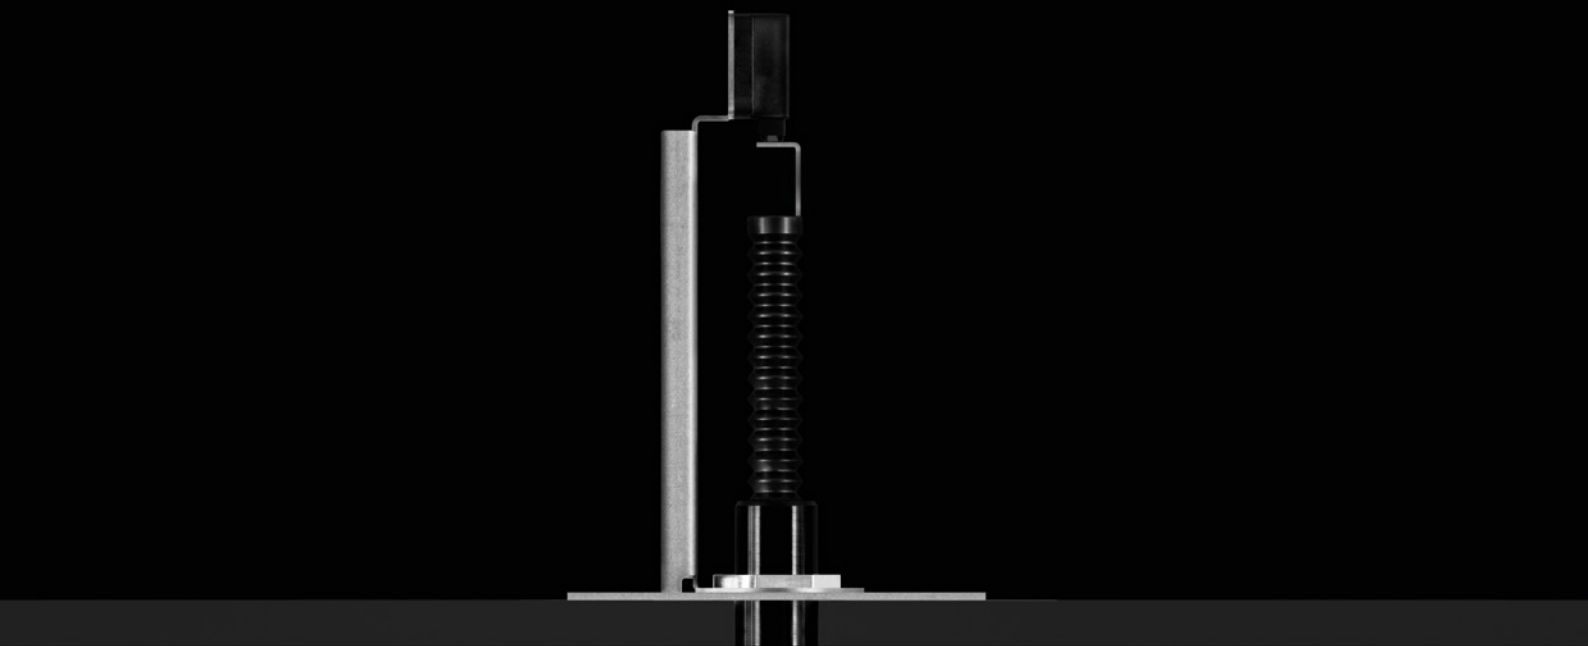

Private Residence  
Treviso











Osteria Francescana Restaurant  
Modena







A tool to light.  
The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.


Recessed / Direct / Indoor		
Material	Metal	
Finish	<div><div>.03</div><div>Matt White</div><div>.04</div><div>Matt Black</div></div>	
Note	Recessed luminaire. Adjustable in all directions. Plasterboard hole: 133x148 mm. Minimum space for recessed installation: 180 mm.	


	<div><div>PUNTO</div><div>Max 21W</div><div>Max 500mA DC</div><div>Driver not included</div><div>LED module not included</div><div>CE  IP20</div></div>	<div><div>Matt White</div><div>Matt Black</div></div>	<div><div>1A1100300.00.20</div><div>1A1100400.00.20</div></div>
---	--	---	---


Compulsory accessories


Installation kits		
	Plasterboard frame 12,5 mm	Not included
Matt White	Cut-out 133x148 mm Minimum space for mounting 180 mm	1A3510300.00.00
Matt Black	Cut-out 133x148 mm Minimum space for mounting 180 mm	1A3510400.00.00


LED modules		
	DG111 LED module	Not included
	16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.27.20
	16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.30.20

	DG111 LED module	Not included
	16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20
	16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20

	DG111 LED module	Not included
	16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20
	16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20

Drivers		
	Driver	Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/DALI	1Z0241180.500

	Driver	Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH	1Z0240840.500

	Driver	Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500

Optional accessories

Other accessories



Accessory holder + Soft filter + Honeycomb louvre		Not included
Matt Black	1X0070400.04.00	



Accessory holder + Elliptical filter		Not included
Matt Black	1X0070400.05.00	



Blue filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



Red filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00




Yellow filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00










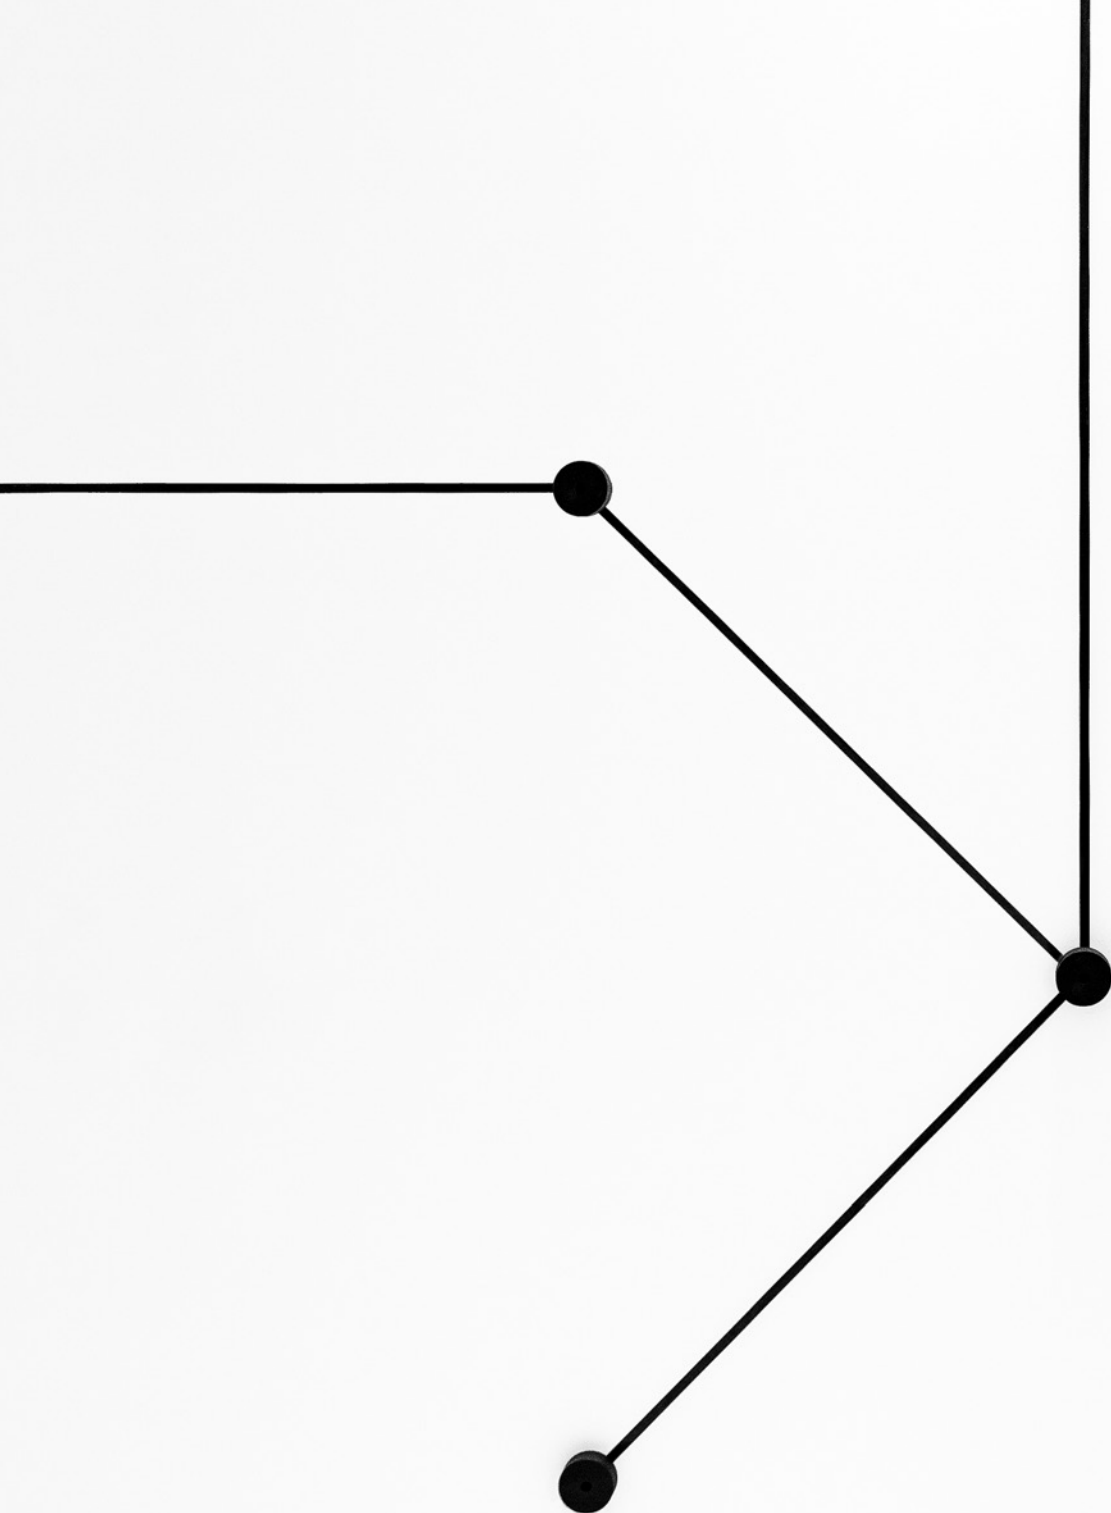




Absolute freedom, absolute spatiality, absolute creativity.  
An adhesive tape that conducts electricity can be placed anywhere  
on walls and ceilings to power our lighting projects.  
Endless is the system created and patented by our Team in order to transport  
electric energy in a digital and graphic manner.  
It's the idea of considering walls and ceilings like electronic circuits,  
where luminaires can be done fixed freely and easily.  
This system comes with various accessories  
to provide and manage the flow of electricity.



ENDLESS ON/OFF  
(Max 48V DC -  
Max 150W - Max 4A)

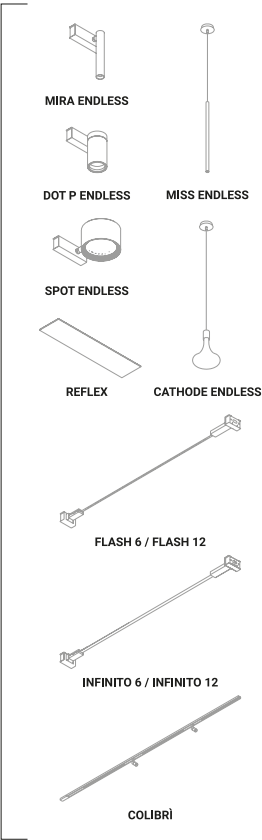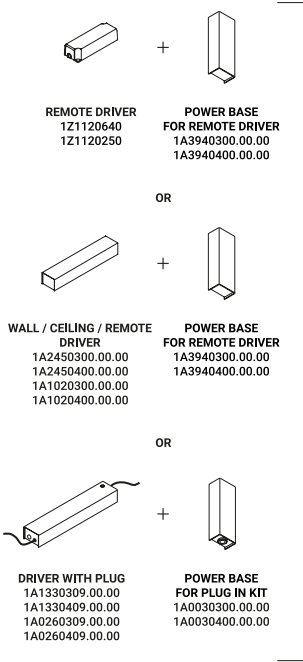


ENDLESS dimmable  
(Max 48V DC -  
Max 150W - Max 4A)

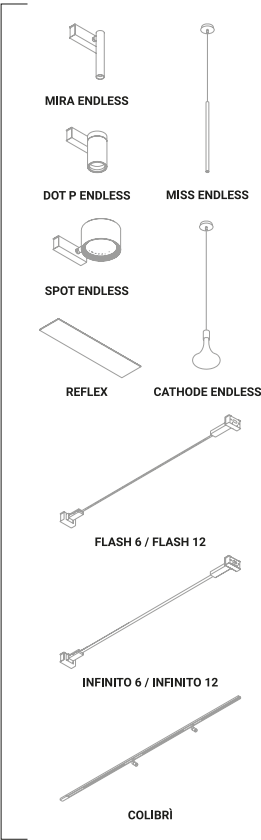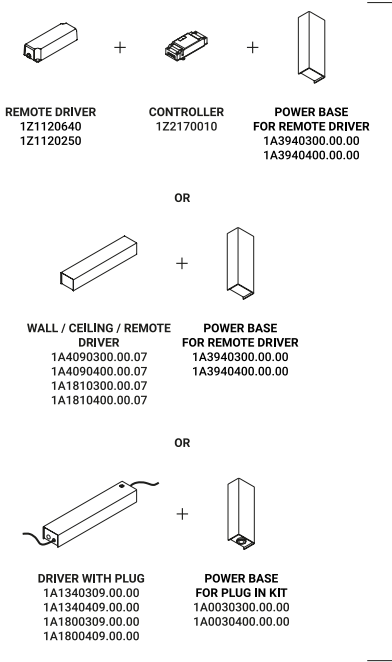





ENDLESS CASAMBI  
(Max 48V DC -  
Max 150W - Max 4A)

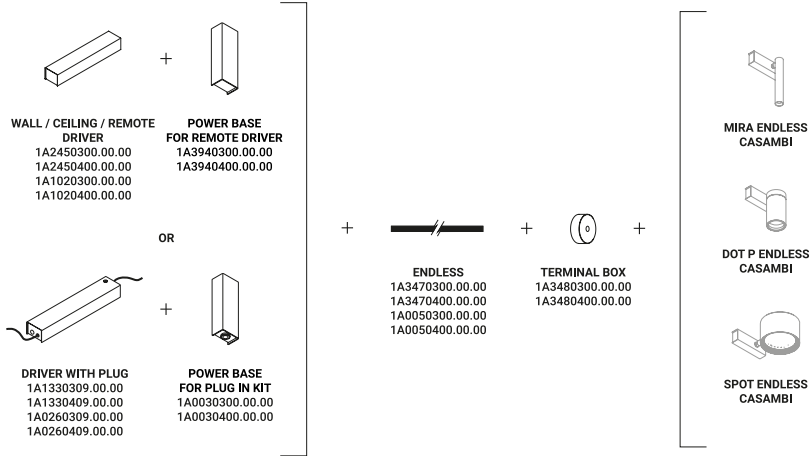

ENDLESS conductive tape  
used with voltage/current  
other than 48V DC

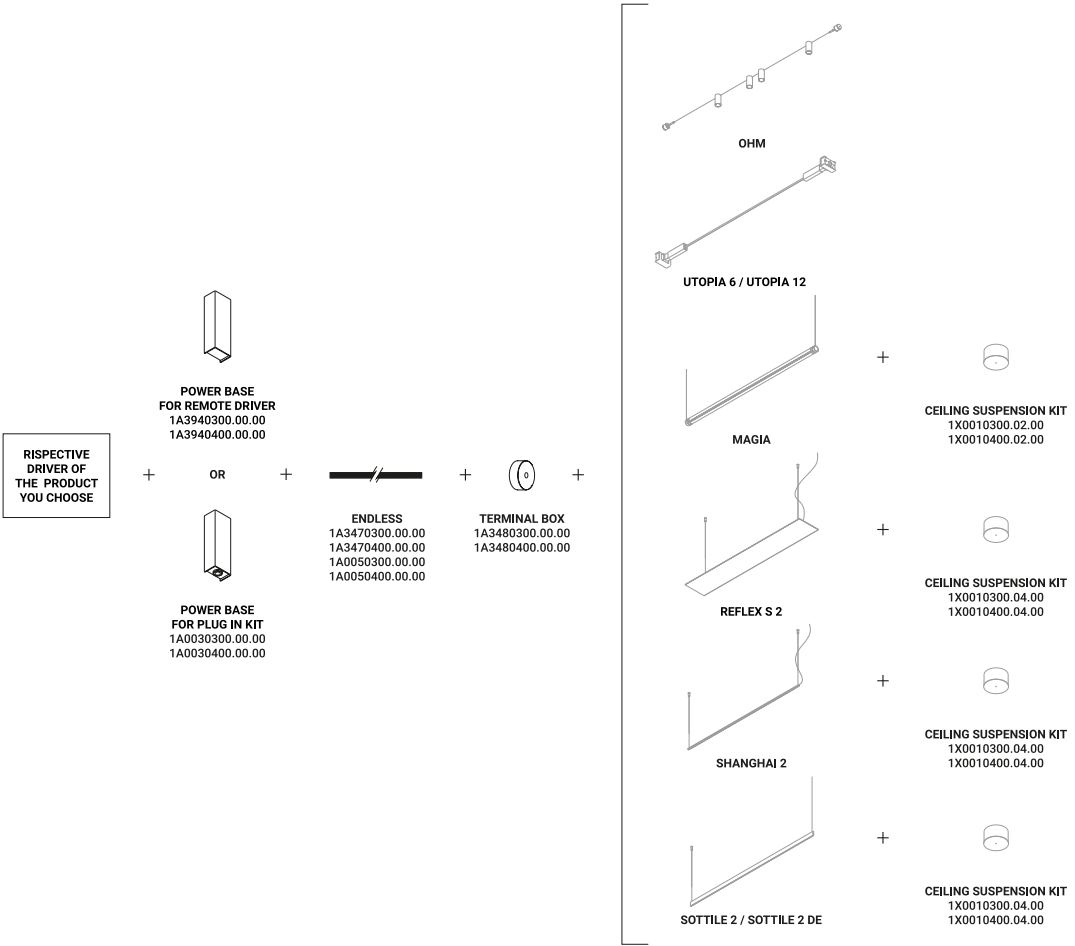

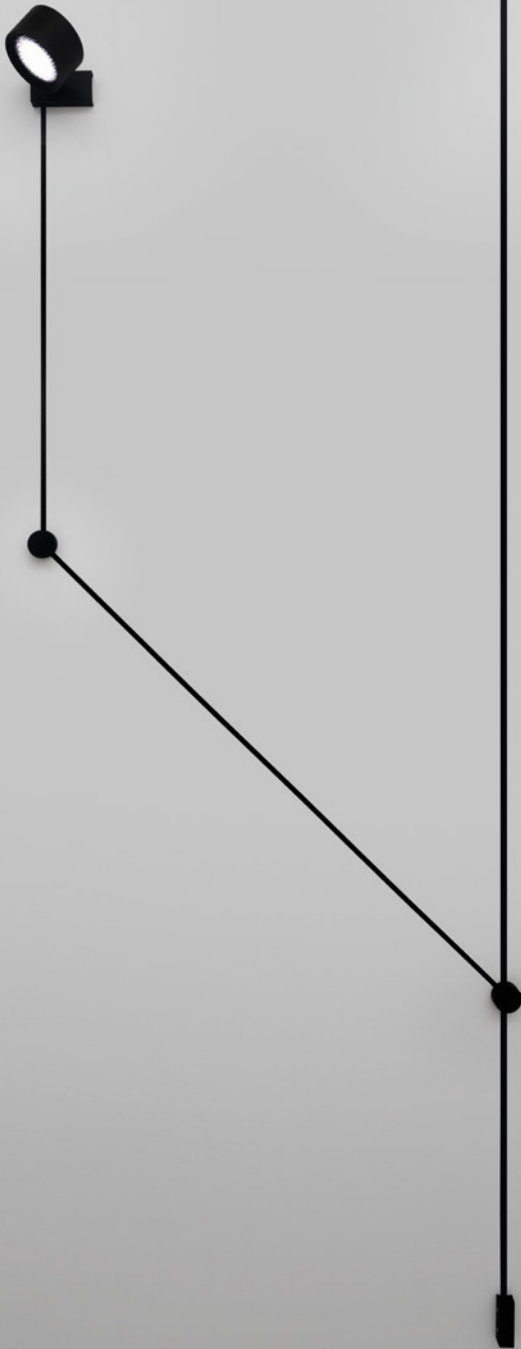

Davide Groppi / 2018

ENDLESS

Systems / Direct-Indirect-Diffuse / Indoor

Material Metal  
Finish .00 Standard

Note System consisting of a conductive adhesive tape to apply to surfaces.  
Possibility to connect several lamps (Max 48V DC - Max 150W - Max 4A).

Optional accessories

Installation kits



Strip Endless - 5 m			Not included
Matt White	Max 48V DC - Max 150W - Max 4A	1A3470300.00.00	
Matt Black	Max 48V DC - Max 150W - Max 4A	1A3470400.00.00	




Strip Endless - 10 m			Not included
Matt White	Max 48V DC - Max 150W - Max 4A	1A0050300.00.00	
Matt Black	Max 48V DC - Max 150W - Max 4A	1A0050400.00.00	




Fixing rough walls kit			Not included
Length 2,5 m		1A0370000.00.00	



Terminal box			Not included
Matt White	2 Terminals included	1A3480300.00.00	
Matt Black	2 Terminals included	1A3480400.00.00	



Power base for plug in kit			Not included
Matt White		1A0030300.00.00	
Matt Black		1A0030400.00.00	




Power base for remote driver			Not included
Matt White		1A3940300.00.00	
Matt Black		1A3940400.00.00	




Terminals			Not included
2 Pieces		1A3490000.00.00	

Optional accessories


Drivers for ENDLESS ON/OFF system and CASAMBI




Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A1330309.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A1330409.00.00



Wall/ceiling/remote driver		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A2450300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A2450400.00.00




Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A0260309.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A0260409.00.00




Wall/ceiling/remote driver		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A1020300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A1020400.00.00

Optional accessories


Drivers for ENDLESS dimmable system




Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - Dimmer on board	1A1340309.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - Dimmer on board	1A1340409.00.06



Wall/ceiling driver		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090400.00.07




Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - Dimmer on board	1A1800309.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - Dimmer on board	1A1800409.00.06




Wall/ceiling driver		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - DALI - PUSH - 1-10V	1A1810300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - DALI - PUSH - 1-10V	1A1810400.00.07




Optional accessories  
Remote drivers for ENDLESS



Driver			Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640	



Driver			Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250	




Controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010	




Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125A		Wattage (W)	Ampere (A)
Power Kit:			
1A133XX09.00.00	Driver with plug - 48V - ON/OFF	Max 60	Max 1,25
1A245XX00.00.00	Wall/ceiling/remote driver - 48V - ON/OFF	Max 60	Max 1,25
1A026XX09.00.00	Driver with plug - 48V - ON/OFF	Max 150	Max 3,12
1A102XX00.00.00	Wall/ceiling/remote driver - 48V - ON/OFF	Max 150	Max 3,12
1A134XX09.00.06	Driver with plug - 48V - Dimmer on board	Max 60	Max 1,25
1A409XX00.00.07	Wall/ceiling driver - 48V - DALI - PUSH - 1-10V	Max 60	Max 1,25
1A180XX09.00.06	Driver with plug - 48V - Dimmer on board	Max 150	Max 3,12
1A181XX00.00.07	Wall/ceiling driver - 48V - DALI - PUSH - 1-10V	Max 150	Max 3,12
1Z1120640	Remote driver - 48V - ON/OFF	Max 60	Max 1,25
1Z1120250	Remote driver - 48V - 1-10V	Max 150	Max 3,12
Elements:			
1A2980300.27.40	CATHODE ENDLESS - Matt White - 2700K	6,3	0,16
1A2980300.30.40	CATHODE ENDLESS - Matt White - 3000K	6,3	0,16
1A2980800.27.40	CATHODE ENDLESS - Brushed Brass - 2700K	6,3	0,16
1A2980800.30.40	CATHODE ENDLESS - Brushed Brass - 3000K	6,3	0,16
1A2982800.27.40	CATHODE ENDLESS - Polished Black Chrome - 2700K	6,3	0,16
1A2982800.30.40	CATHODE ENDLESS - Polished Black Chrome - 3000K	6,3	0,16
1A4260400.27.01	COLIBRÌ 18 - 15° - Matt Black - 2700K - DALI	2	0,05
1A4260400.30.01	COLIBRÌ 18 - 15° - Matt Black - 3000K - DALI	2	0,05
1A4270400.27.01	COLIBRÌ 18 - 25° - Matt Black - 2700K - DALI	2	0,05
1A4270400.30.01	COLIBRÌ 18 - 25° - Matt Black - 3000K - DALI	2	0,05
1A4280400.27.01	COLIBRÌ 28 - 15° - Matt Black - 2700K - DALI	4	0,10
1A4280400.30.01	COLIBRÌ 28 - 15° - Matt Black - 3000K - DALI	4	0,10
1A4290400.27.01	COLIBRÌ 28 - 25° - Matt Black - 2700K - DALI	5	0,13
1A4290400.30.01	COLIBRÌ 28 - 25° Matt Black - 3000K - DALI	5	0,13
1A2340300.27.40	DOT P ENDLESS - Matt White - 2700K	13	0,34
1A2340300.30.40	DOT P ENDLESS - Matt White - 3000K	13	0,34
1A2340400.27.40	DOT P ENDLESS - Matt Black - 2700K	13	0,34
1A2340400.30.40	DOT P ENDLESS - Matt Black - 3000K	13	0,34
1A2344900.27.40	DOT P ENDLESS - Matt Black/Polished Gold - 2700K	13	0,34
1A2344900.30.40	DOT P ENDLESS - Matt Black/Polished Gold - 3000K	13	0,34
1A2340300.27.41	DOT P ENDLESS CASAMBI - Matt White - 2700K	15,5	0,40
1A2340300.30.41	DOT P ENDLESS CASAMBI - Matt White - 3000K	15,5	0,40
1A2340400.27.41	DOT P ENDLESS CASAMBI - Matt Black - 2700K	15,5	0,40
1A2340400.30.41	DOT P ENDLESS CASAMBI - Matt Black - 3000K	15,5	0,40
1A2344900.27.41	DOT P ENDLESS CASAMBI - Matt Black/Polished Gold - 2700K	15,5	0,40
1A2344900.30.41	DOT P ENDLESS CASAMBI - Matt Black/Polished Gold - 3000K	15,5	0,40
1A2130300.27.20	FLASH 6 - Matt White - 2700K	57	1,48
1A2130300.30.20	FLASH 6 - Matt White - 3000K	57	1,48
1A2130400.27.20	FLASH 6 - Matt Black - 2700K	57	1,48
1A2130400.30.20	FLASH 6 - Matt Black - 3000K	57	1,48


Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125A		Wattage (W)	Ampere (A)
1A2150300.27.20	FLASH 12 - Matt White - 2700K	114	2,97
1A2150300.30.20	FLASH 12 - Matt White - 3000K	114	2,97
1A2150400.27.20	FLASH 12 - Matt Black - 2700K	114	2,97
1A2150400.30.20	FLASH 12 - Matt Black - 3000K	114	2,97
1A2250300.27.20	INFINITO 6 - Matt White - 2700K	57	1,48
1A2250300.30.20	INFINITO 6 - Matt White - 3000K	57	1,48
1A2250400.27.20	INFINITO 6 - Matt Black - 2700K	57	1,48
1A2250400.30.20	INFINITO 6 - Matt Black - 3000K	57	1,48
1A2260300.27.20	INFINITO 12 - Matt White - 2700K	114	2,97
1A2260300.30.20	INFINITO 12 - Matt White - 3000K	114	2,97
1A2260400.27.20	INFINITO 12 - Matt Black - 2700K	114	2,97
1A2260400.30.20	INFINITO 12 - Matt Black - 3000K	114	2,97
1A2280300.27.40	MIRA ENDLESS - Matt White - 2700K	6	0,16
1A2280300.30.40	MIRA ENDLESS - Matt White - 3000K	6	0,16
1A2280400.27.40	MIRA ENDLESS - Matt Black - 2700K	6	0,16
1A2280400.30.40	MIRA ENDLESS - Matt Black - 3000K	6	0,16
1A2284900.27.40	MIRA ENDLESS - Matt Black/Polished Gold - 2700K	6	0,16
1A2284900.30.40	MIRA ENDLESS - Matt Black/Polished Gold - 3000K	6	0,16
1A2280300.27.41	MIRA ENDLESS CASAMBI - Matt White - 2700K	7	0,18
1A2280300.30.41	MIRA ENDLESS CASAMBI - Matt White - 3000K	7	0,18
1A2280400.27.41	MIRA ENDLESS CASAMBI - Matt Black - 2700K	7	0,18
1A2280400.30.41	MIRA ENDLESS CASAMBI - Matt Black - 3000K	7	0,18
1A2284900.27.41	MIRA ENDLESS CASAMBI - Matt Black/Polished Gold - 2700K	7	0,18
1A2284900.30.41	MIRA ENDLESS CASAMBI - Matt Black/Polished Gold - 3000K	7	0,18
1A2960300.27.40	MISS ENDLESS - Matt White - 2700K	6,3	0,16
1A2960300.30.40	MISS ENDLESS - Matt White - 3000K	6,3	0,16
1A2960400.27.40	MISS ENDLESS - Matt Black - 2700K	6,3	0,16
1A2960400.30.40	MISS ENDLESS - Matt Black - 3000K	6,3	0,16
1A2960800.27.40	MISS ENDLESS - Brushed Brass - 2700K	6,3	0,16
1A2960800.30.40	MISS ENDLESS - Brushed Brass - 3000K	6,3	0,16
1A2962600.27.40	MISS ENDLESS - Total Black - 2700K	6,3	0,16
1A2962600.30.40	MISS ENDLESS - Total Black - 3000K	6,3	0,16
1A2962800.27.40	MISS ENDLESS - Polished Black Chrome - 2700K	6,3	0,16
1A2962800.30.40	MISS ENDLESS - Polished Black Chrome - 3000K	6,3	0,16
1A5500400.27.20	REFLEX - Matt Black - 2700K	40	1,04
1A5500400.30.20	REFLEX - Matt Black - 3000K	40	1,04
1A1080300.00.40	SPOT ENDLESS - Matt White	Max 13	Max 0,34
1A1080400.00.40	SPOT ENDLESS - Matt Black	Max 13	Max 0,34
1A1084900.00.40	SPOT ENDLESS - Matt Black/Polished Gold	Max 13	Max 0,34
1A1080300.00.41	SPOT ENDLESS CASAMBI - Matt White	Max 15,5	Max 0,40
1A1080400.00.41	SPOT ENDLESS CASAMBI - Matt Black	Max 15,5	Max 0,40
1A1084900.00.41	SPOT ENDLESS CASAMBI - Matt Black/Polished Gold	Max 15,5	Max 0,40

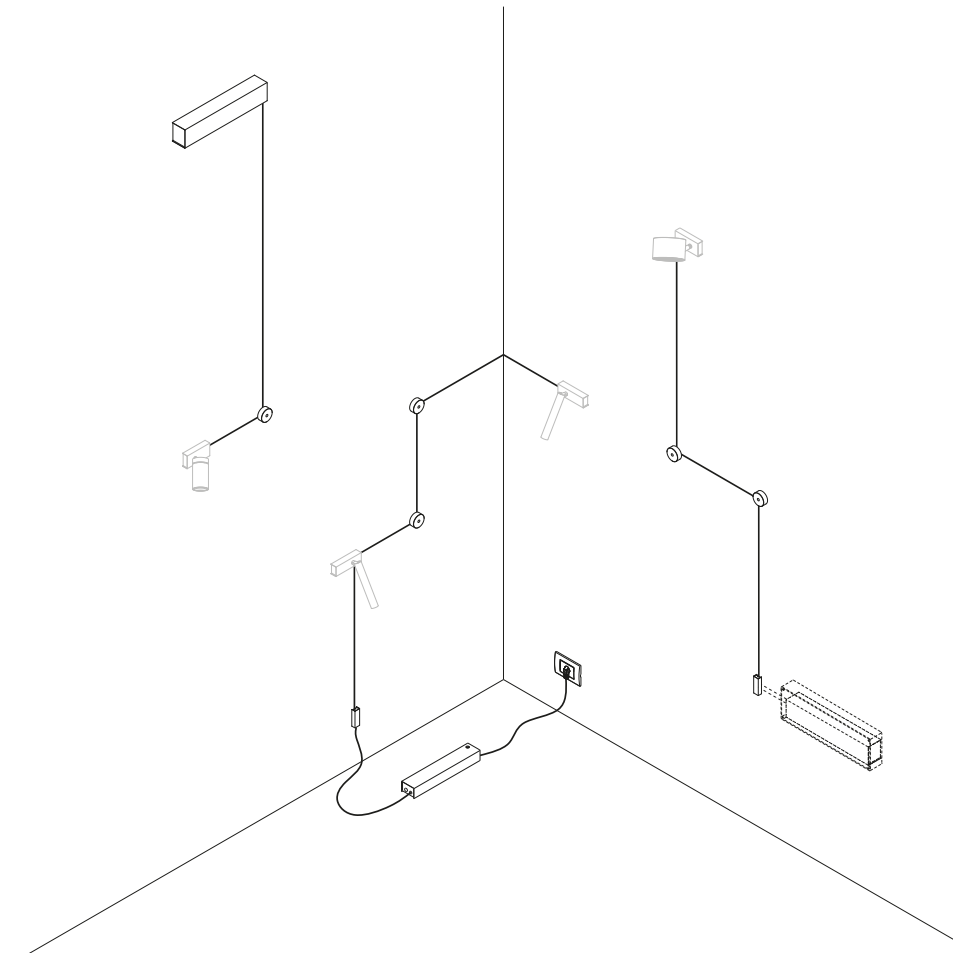


Examples of installation with the three different power supply modes

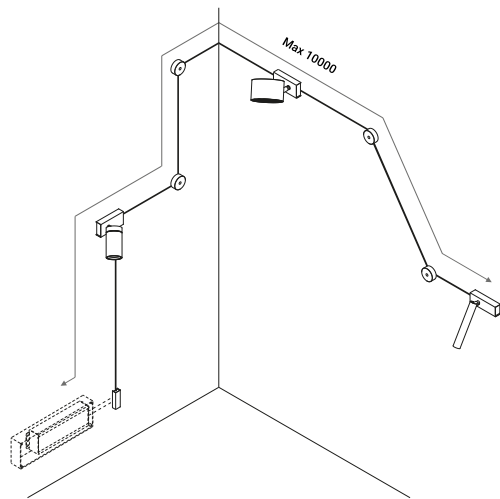


Example of combined installation between various devices with remote driver

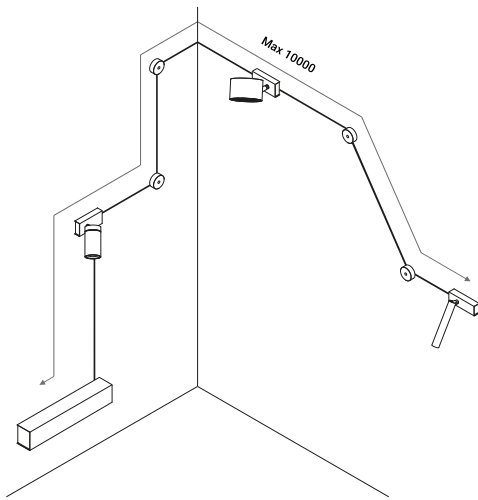


Example of combined installation between various devices with wall/ceiling driver

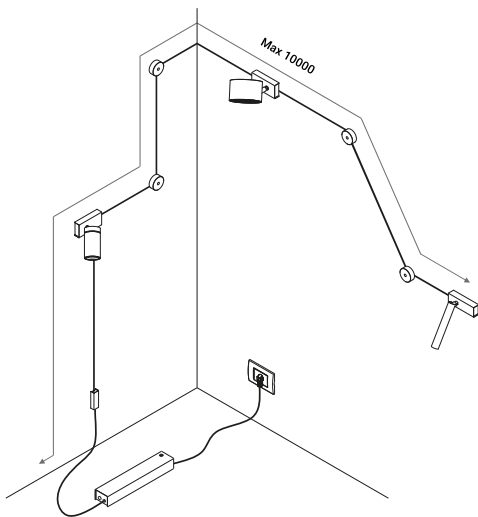

Example of combined installation between various devices with driver with plug

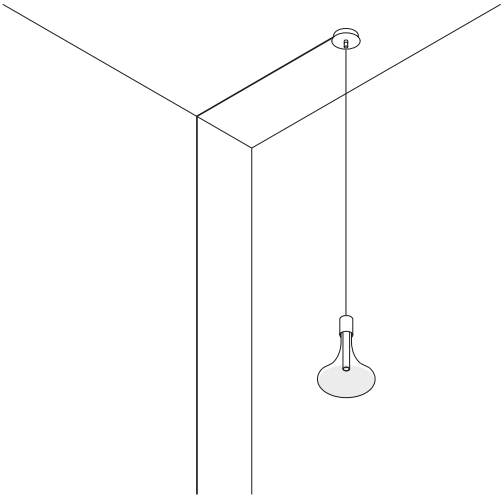


CATHODE: example of installation

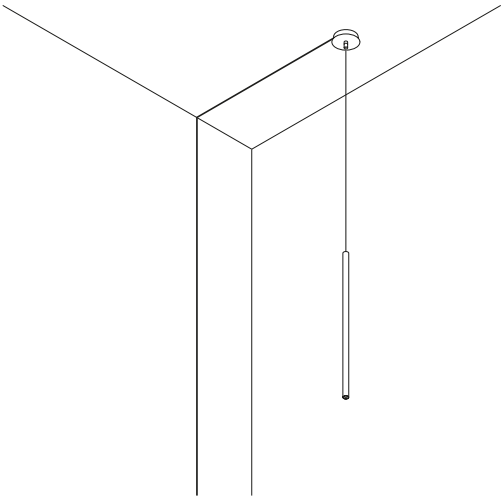


MISS: example of installation






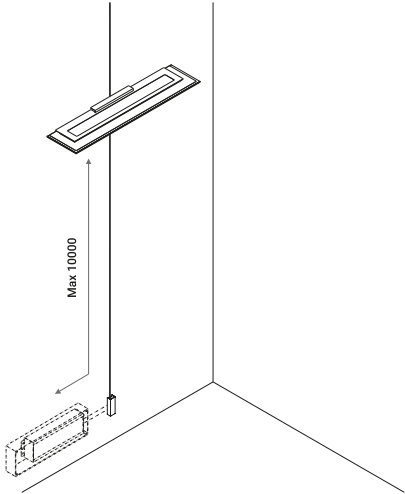


REFLEX: example of installation with remote driver

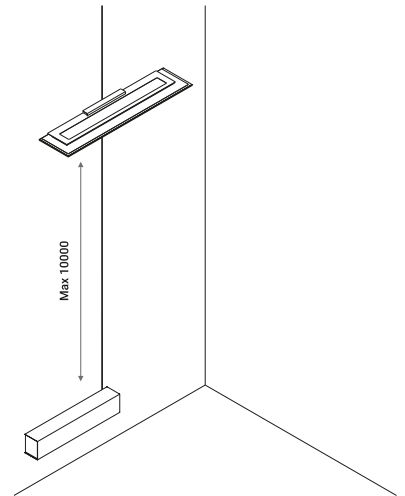


REFLEX: example of installation with wall/ceiling driver

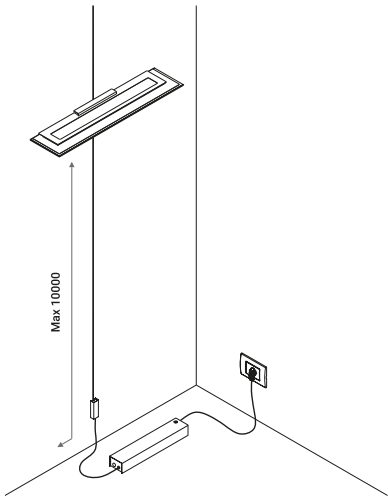


REFLEX: example of installation with driver with plug

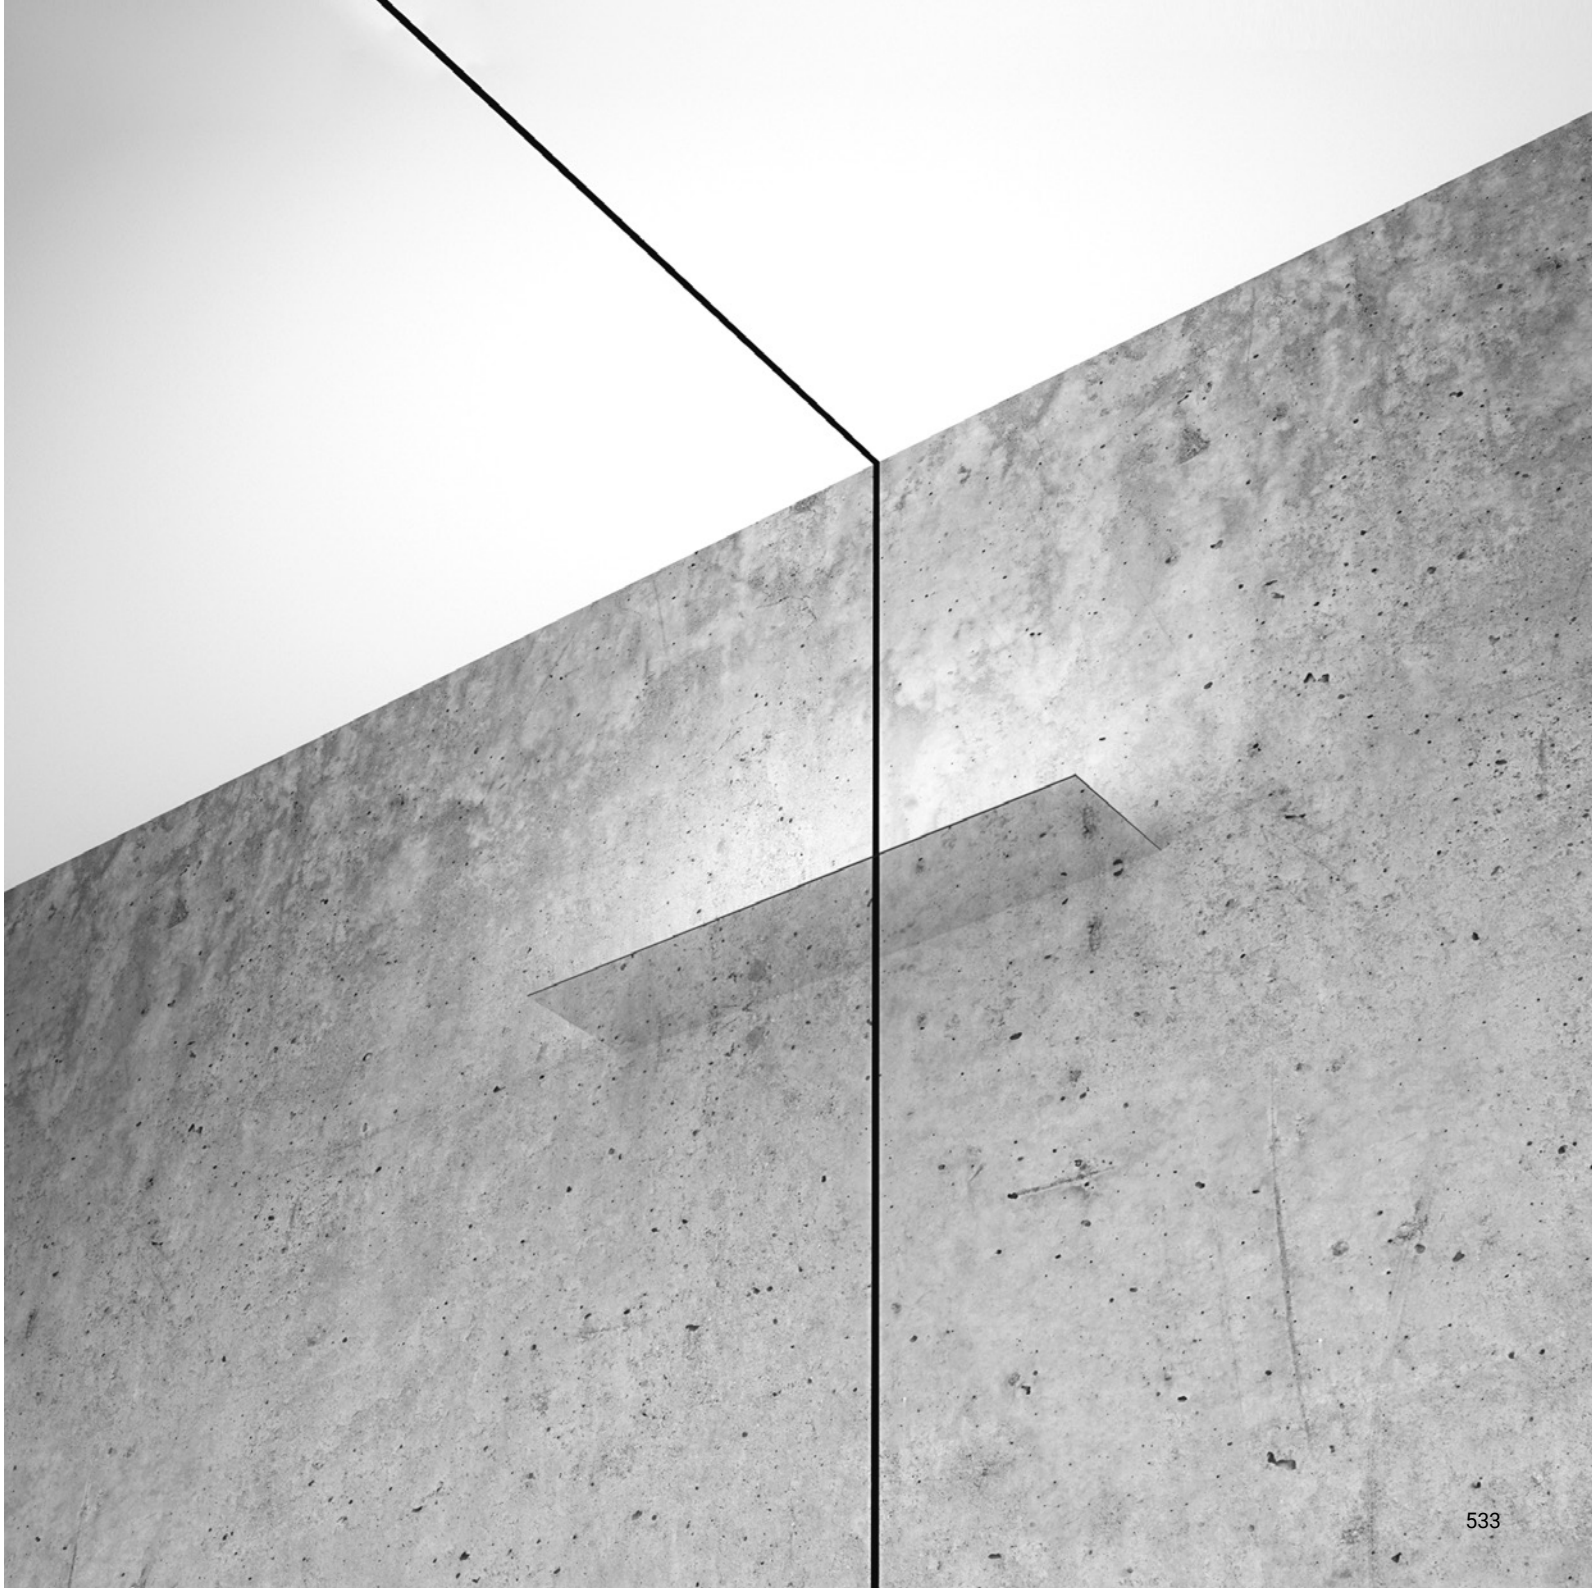


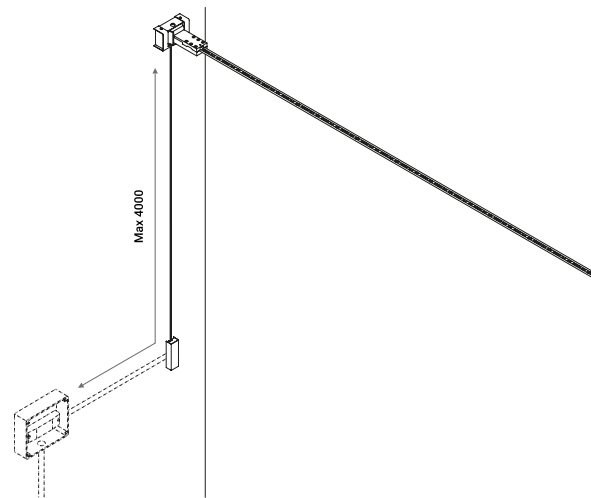

FLASH and INFINITO: example of installation with remote driver

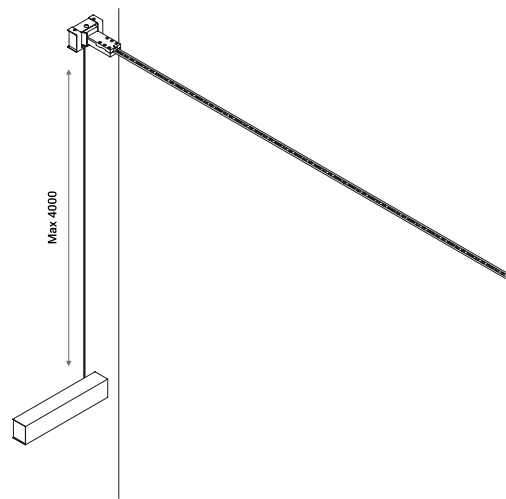


FLASH and INFINITO: example of installation with wall/ceiling driver

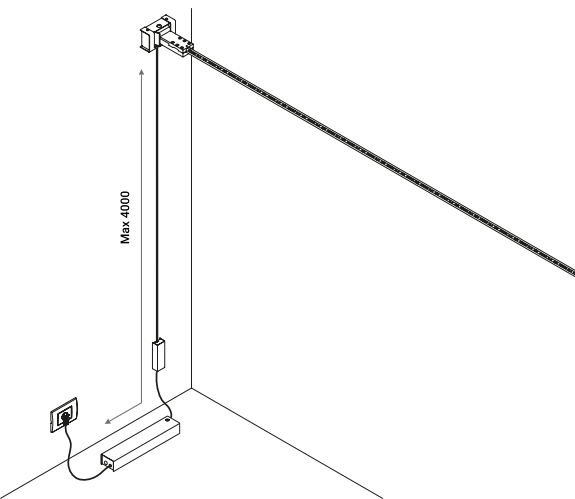

FLASH and INFINITO: example of installation with driver with plug




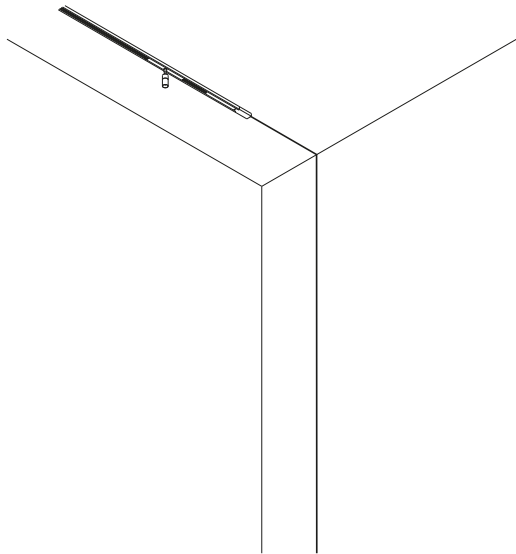


COLIBRI\ example of installation




1A4170000.20.00  
COLIBRI ENDLESS connector

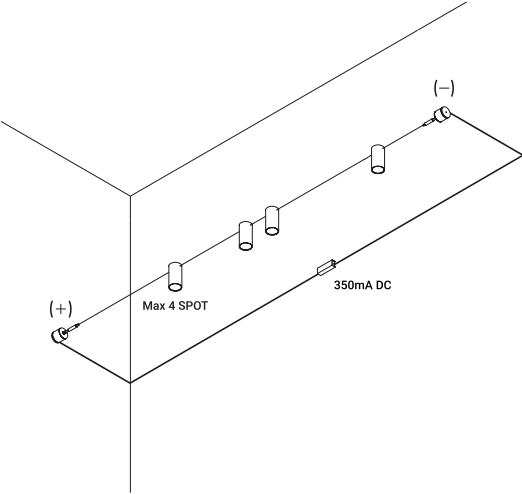

OHM: example of installation

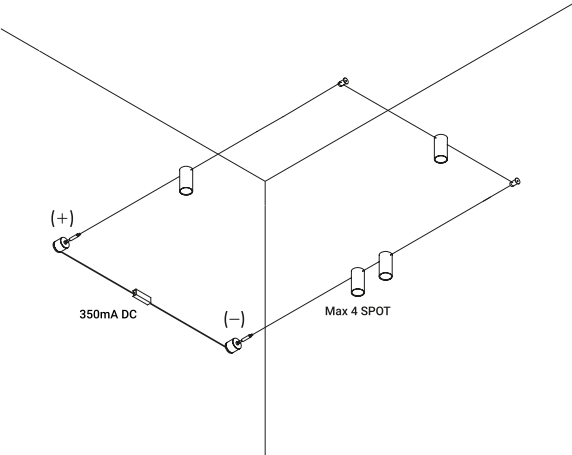


OHM: example of installation

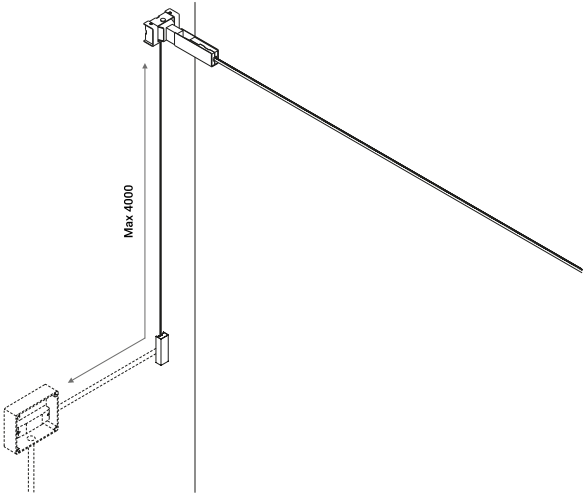

UTOPIA: example of installation



1X001XX00.02.00 - 1X001XX00.04.00  
Ceiling suspension kit

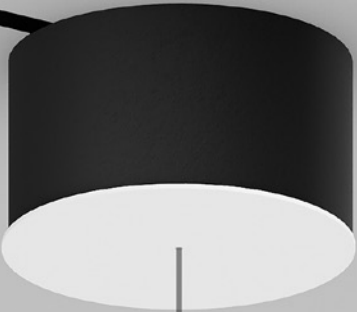




## FLASH


Davide Groppi / 2017

It is our Infinito model turned around, with the light flowing downwards.  
The 9 mm wide stainless steel strip can run perfectly up to 36 metres in length  
(standard versions at 6 / 12 / 18 metres in length).  
The ideal solution for direct illumination of spaces with very high ceilings.  
Its name pays homage to the famous comic book superhero,  
who can run seven times the speed of light.  
Luminaire designed also to be powered by ENDLESS system.


How to order -  
FLASH 6

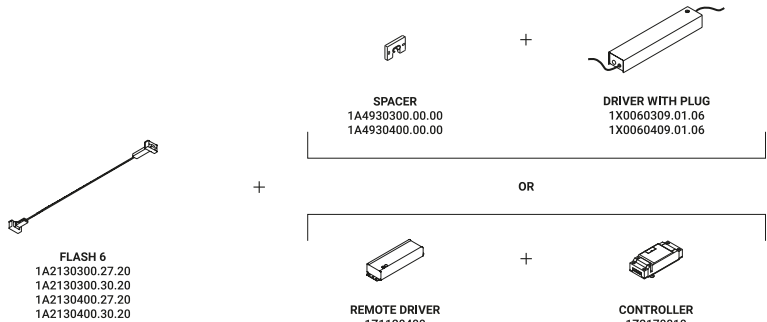

How to order -  
FLASH 12

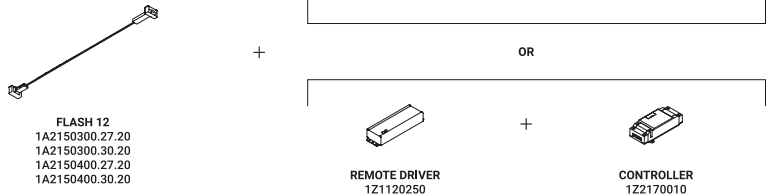

How to order -  
FLASH 18

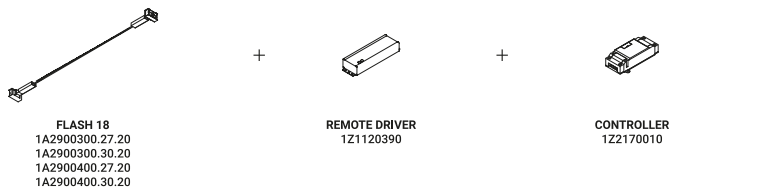


Wall-Systems / Direct / Indoor

Material	Metal	
Finish	.03 Matt White	.04 Matt Black

**Note**


Special stainless steel tape (9 mm) running from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Dual emission (DE) and Tunable White (TW – 5 / 10 m) versions. LED strip that can be divided every 96,6 mm. DE versions are available with dual on/off (two drivers required). FLASH 6 and FLASH 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.



**FLASH 6**  
57W - 1,48A  
48V DC  
2700K - 6576lm / 3000K - 6708lm  
CRI >90  
Driver not included  
CE IP20 E

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K


1A2130300.27.20  
1A2130300.30.20  
1A2130400.27.20  
1A2130400.30.20

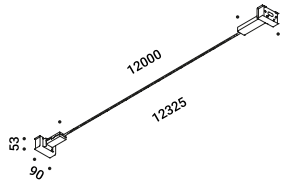

**FLASH 12**  
114W - 2,97A  
48V DC  
2700K - 13152lm / 3000K - 13416lm  
CRI >90  
Driver not included  
CE IP20 E

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A2150300.27.20  
1A2150300.30.20  
1A2150400.27.20  
1A2150400.30.20

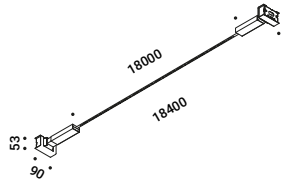


**FLASH 18**  
171W  
48V DC  
2700K - 19728lm / 3000K - 20124lm  
CRI >90  
Driver not included  
CE IP20


Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A2900300.27.20  
1A2900300.30.20  
1A2900400.27.20  
1A2900400.30.20



How to order -  
FLASH 6 DE

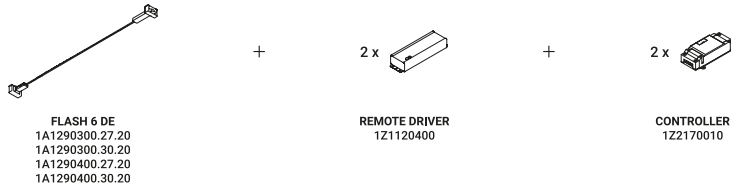

How to order -  
FLASH 12 DE

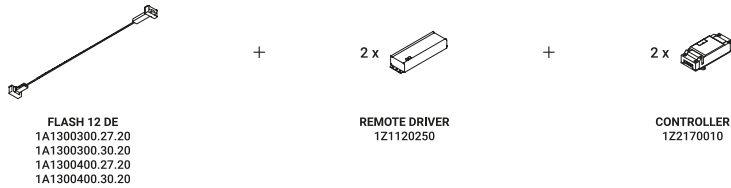


How to order -  
FLASH 18 DE

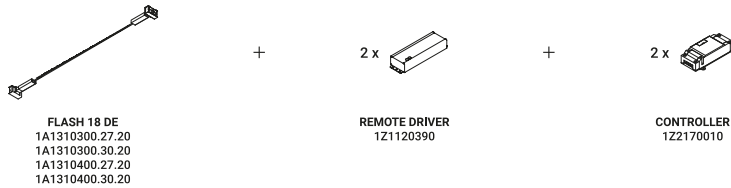

**FLASH 6 DE**  
Dual emission  
114W  
48V DC  
2700K - Up 6576lm - Down 6576lm /  
3000K - Up 6708lm - Down 6708lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K


1A1290300.27.20  
1A1290300.30.20  
1A1290400.27.20  
1A1290400.30.20



**FLASH 12 DE**  
Dual emssion  
228W  
48V DC  
2700K - Up 13152lm - Down 13152lm /  
3000K - Up 13416lm - Down 13416lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A1300300.27.20  
1A1300300.30.20  
1A1300400.27.20  
1A1300400.30.20

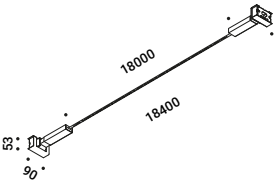


**FLASH 18 DE**  
Dual emission  
342W  
48V DC  
2700K - Up 19728lm - Down 19728lm /  
3000K - Up 20124lm - Down 20124lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K


1A1310300.27.20  
1A1310300.30.20  
1A1310400.27.20  
1A1310400.30.20




How to order -  
FLASH 5 TW

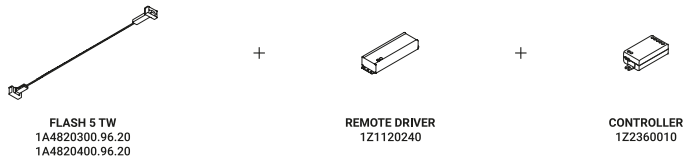

How to order -  
FLASH 10 TW

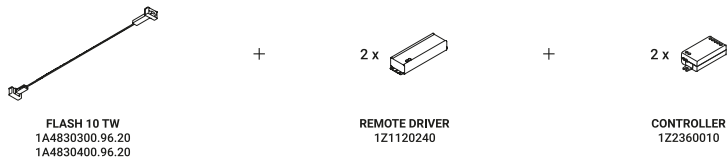


**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light.

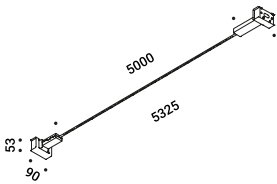

**FLASH 5 TW**  
Tunable White  
96W  
24V DC  
2700K - 4690lm / 6500K - 5190lm  
CRI >90  
Driver not included  
CE IP20


Matt White - 2700K / 6500K	1A4820300.96.20
Matt Black - 2700K / 6500K	1A4820400.96.20

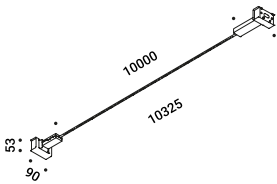


**FLASH 10 TW**  
Tunable White  
192W  
24V DC  
2700K - 9380lm / 6500K - 10380lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K / 6500K	1A4830300.96.20
Matt Black - 2700K / 6500K	1A4830400.96.20


How to order -  
FLASH 5 DE TW

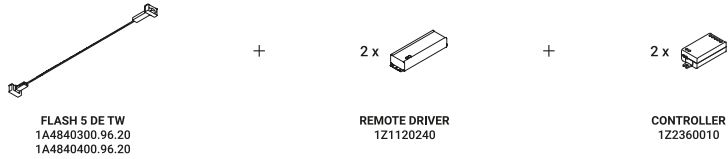

How to order -  
FLASH 10 DE TW

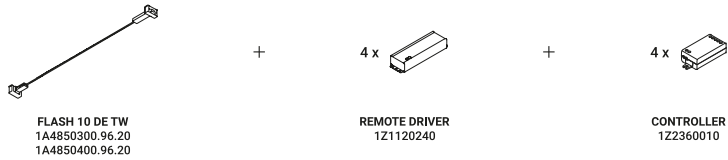


**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light.

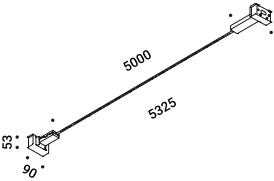

**FLASH 5 DE TW**  
Dual emission - Tunable White  
192W  
24V DC  
2700K - 9380lm / 6500K - 10380lm  
CRI >90  
Driver not included  
CE <img alt="Energy label icon" data-bbox="648 301 658 311"/> IP20

Matt White - 2700K / 6500K	1A4840300.96.20
Matt Black - 2700K / 6500K	1A4840400.96.20

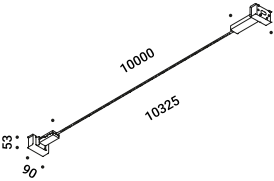









**FLASH 10 DE TW**  
Dual emission - Tunable White  
384W  
24V DC  
2700K - 18760lm / 6500K - 20760lm  
CRI >90  
Driver not included  
CE <img alt="Energy label icon" data-bbox="648 539 658 549"/> IP20


Matt White - 2700K / 6500K	1A4850300.96.20
Matt Black - 2700K / 6500K	1A4850400.96.20

Compulsory accessories


Drivers				
	Driver with plug			Not included
	Matt White	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	FLASH 6	1X0060309.01.06
	Driver with plug			Not included
	Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	FLASH 12	1X0060309.02.06
	Driver			Not included
	100-240V	48V/80W/IP67/1-10V	FLASH 6 / FLASH 6 DE	1Z1120400
	Driver			Not included
	100-240V	48V/150W/IP67/1-10V	FLASH 12 / FLASH 12 DE	1Z1120250
	Driver			Not included
	100-240V	48V/240W/IP67/1-10V	FLASH 18 / FLASH 18 DE	1Z1120390
	Driver			Not included
	100-240V	24V/120W/IP67/1-10V	FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z1120240

Compulsory accessories


Drivers			
	Controller		
	DALI - PUSH - 0/1-10V - TRIAC - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 18 DE	1Z2170010
	Controller Casambi - Tunable White		
		FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z2360010
Optional accessories			
Installation kits			
	Spacer		
	Matt White	For driver kit with plug	FLASH 6 / FLASH 12
	Ceiling installation kit		
	Matt White		1A0080300.00.00
	Kit wall connection vertical sloped 45°		
	Matt White		1A0120300.00.00
	Kit wall connection sloped right 75°		
	Matt White		1A0340300.00.00
	Kit wall connection sloped left 75°		
	Matt White		1A0350300.00.00
	Swallows		
	Matt Black		1A0800400.00.00

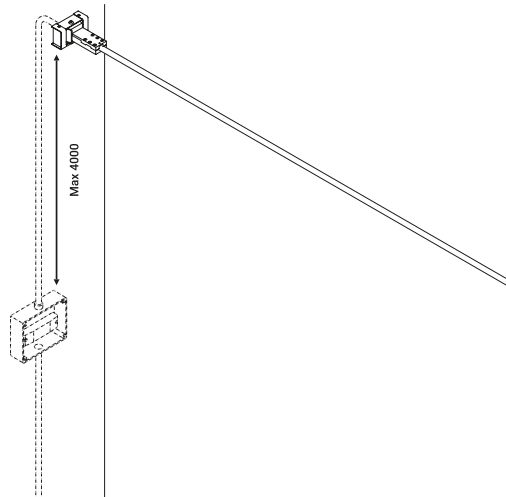


Example of installation with remote driver

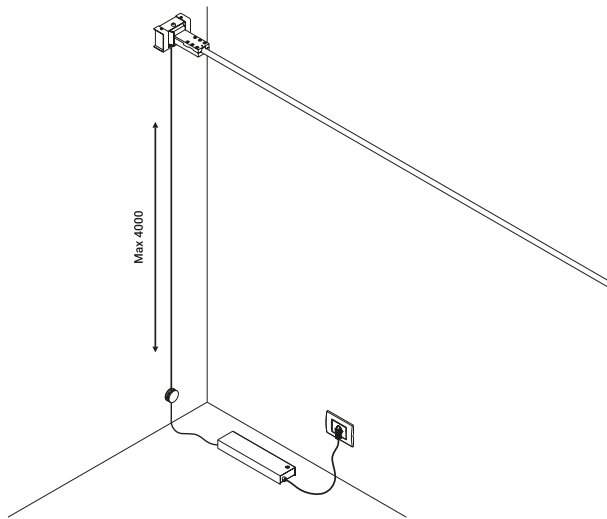


Example of installation with driver with plug

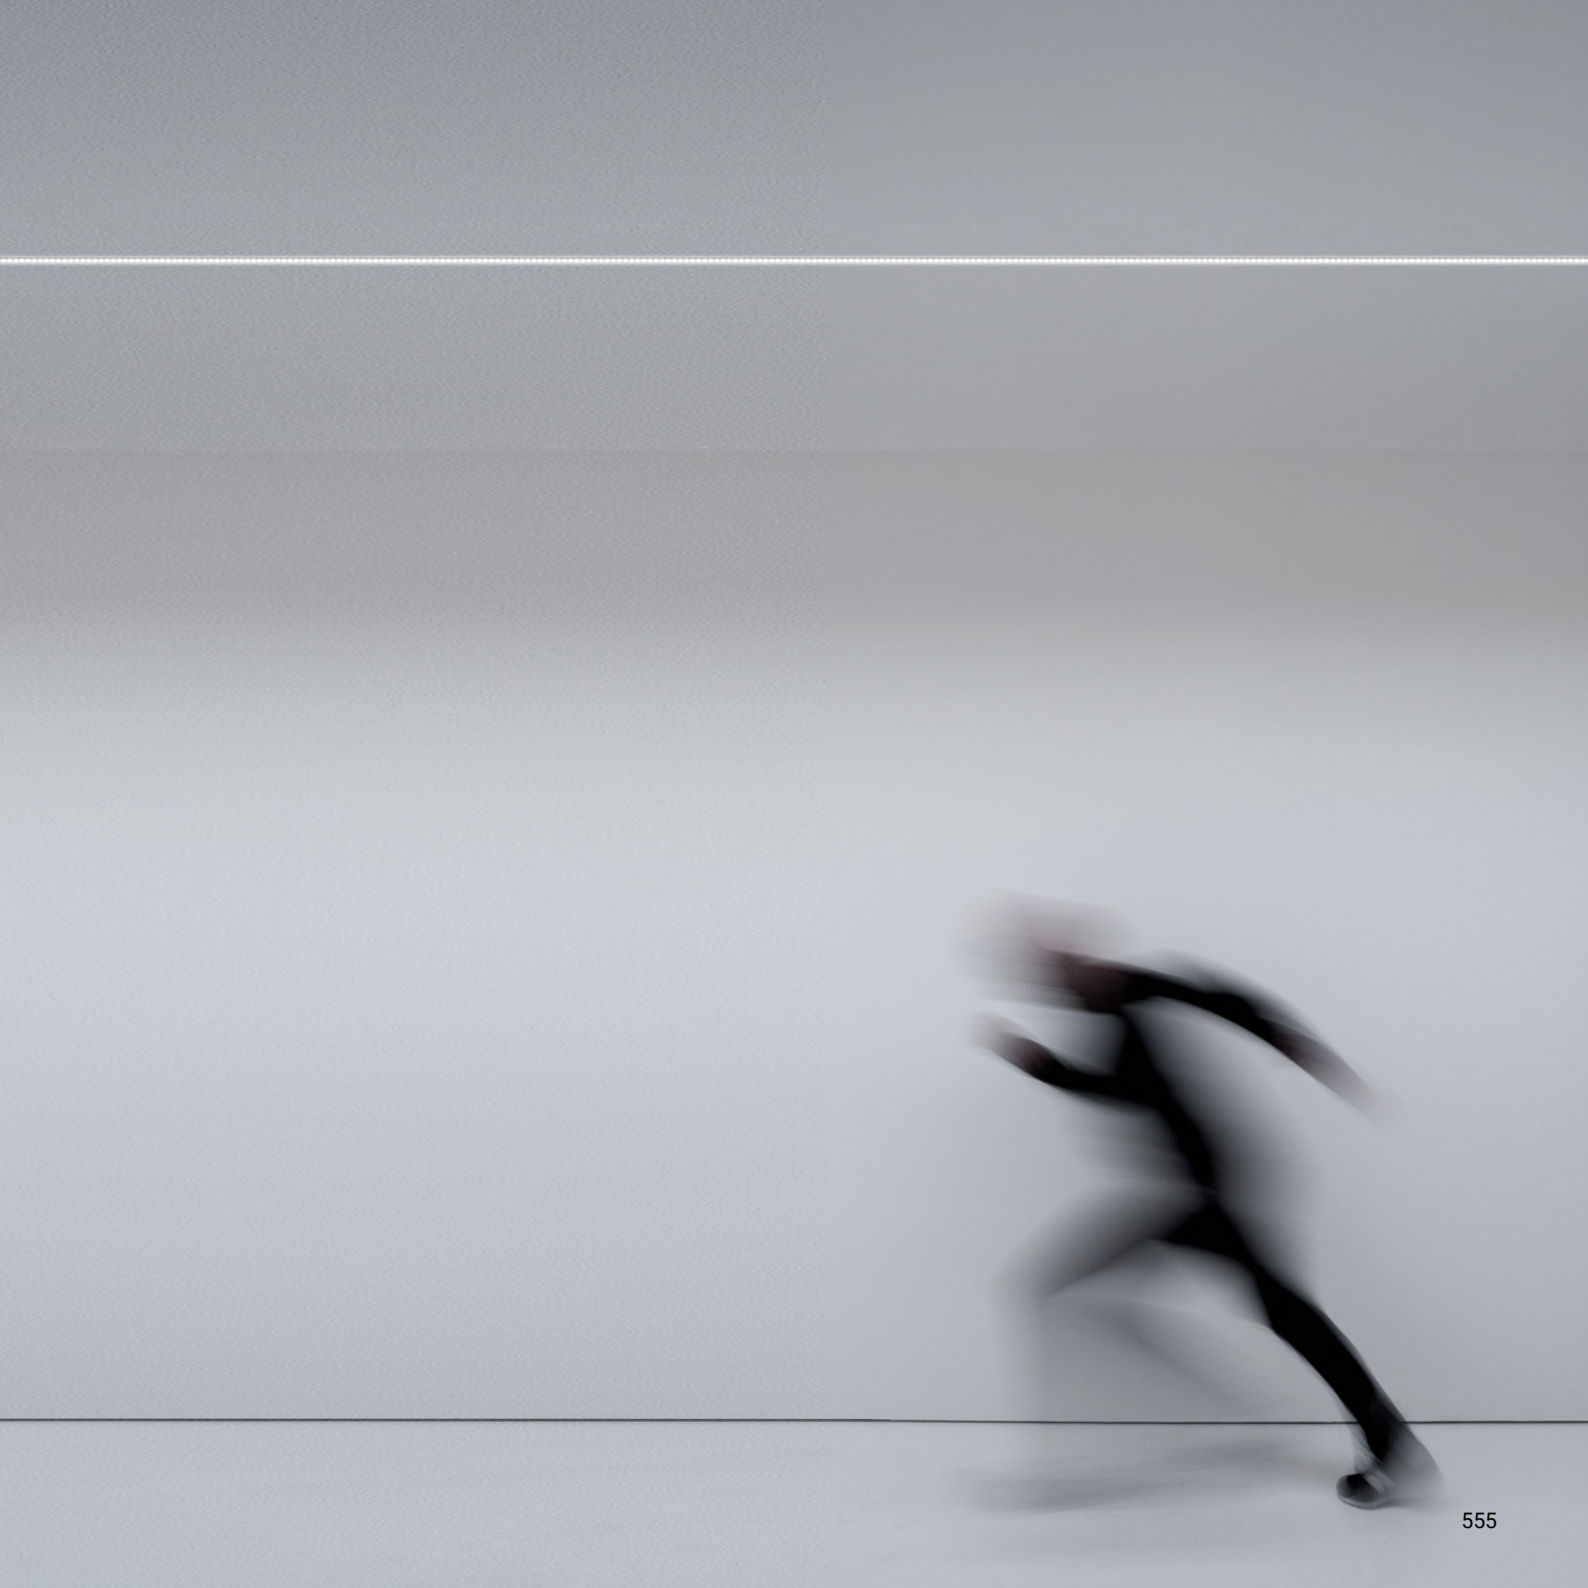




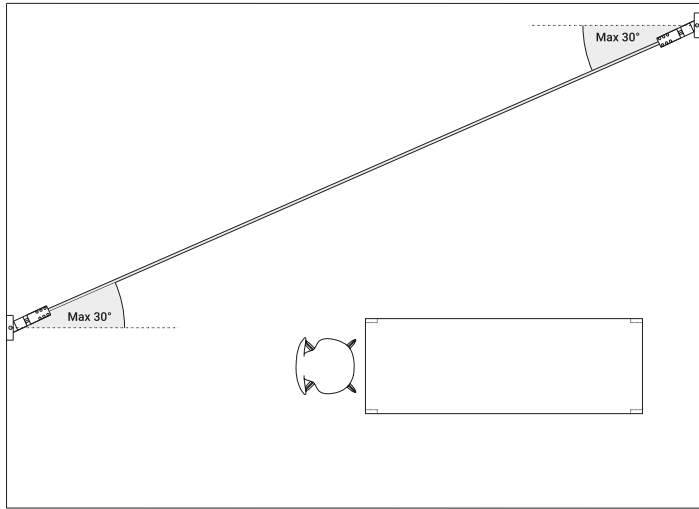


Example of installation with max rotation 30°

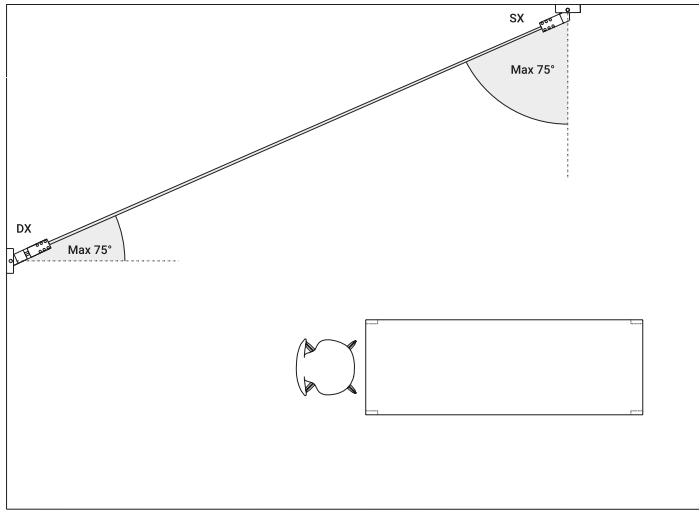

1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

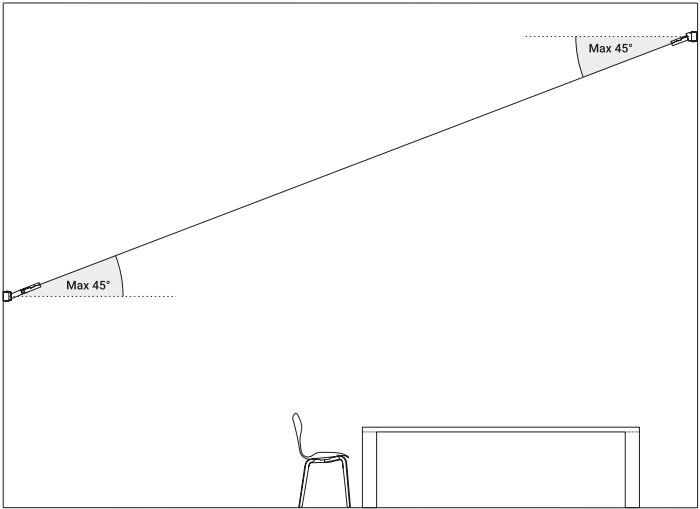

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

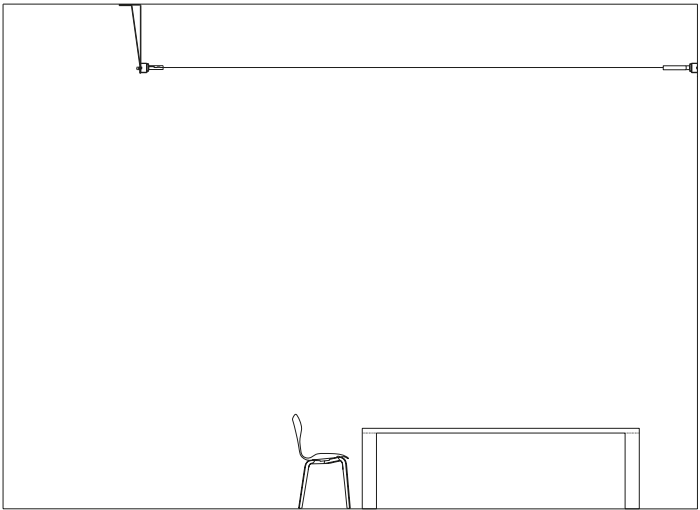

1A0080400.00.00 - Example of installation with ceiling installation kit





Acetaia Maria Luigia  
Modena





## INFINITO

Davide Groppi / 2016

A spatial concept, it is continuous light.

An ultra-thin strip of special stainless steel just 18 mm wide “cuts” the space to produce indirect light. Infinito can be adapted to various situations, stretched from wall to wall or ceiling to floor.

It comes in strips up to 36 metres in length (standard versions at 6 / 12 / 18 metres in length).

Infinito breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light.

This project pays homage to the art of Lucio Fontana and his spatial concepts.

The graphic force of this system is surprising.

It can be integrated into space, but at the same time it becomes part of that space. Infinito: essence and absence.


Luminaire designed also to be powered by ENDLESS system.

**Archiproducts Design Award 2017**


**People's Choice AZ Award 2017**




How to order - INFINITO 6

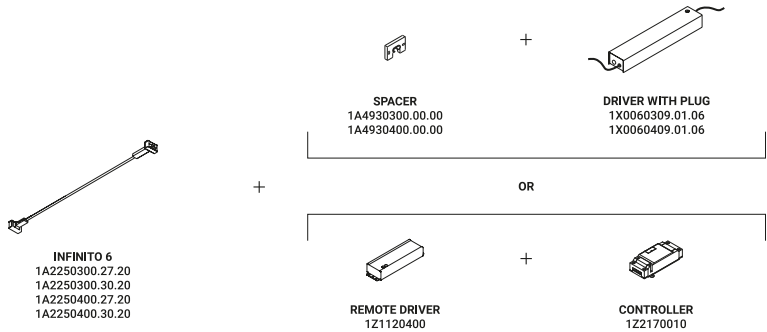

How to order - INFINITO 12

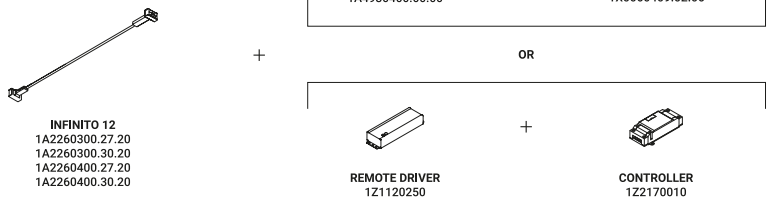


How to order - INFINITO 18

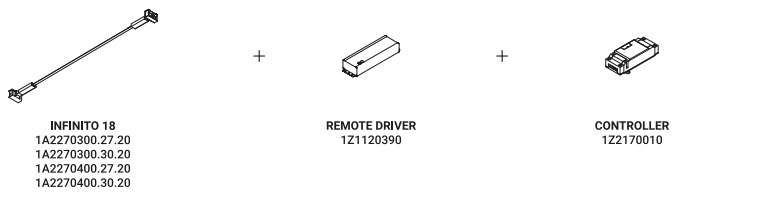

Wall-Systems / Indirect / Indoor

Material Metal  
Finish .03 Matt White .04 Matt Black


Note Special stainless steel tape (18 mm) stretched from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Tunable White (TW - 5 / 10 m) version. LED strip that can be divided every 96,6 mm. INFINITO 6 and INFINITO 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

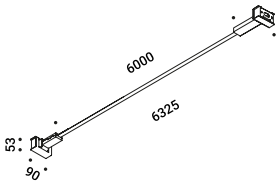

INFINITO 6  
57W - 1,48A  
48V DC  
2700K - 6576lm / 3000K - 6708lm  
CRI >90  
Driver not included  
CE IP20 E

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K


1A2250300.27.20  
1A2250300.30.20  
1A2250400.27.20  
1A2250400.30.20

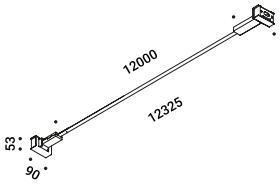

INFINITO 12  
114W - 2,97A  
48V DC  
2700K - 13152lm / 3000K - 13416lm  
CRI >90  
Driver not included  
CE IP20 E

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A2260300.27.20  
1A2260300.30.20  
1A2260400.27.20  
1A2260400.30.20

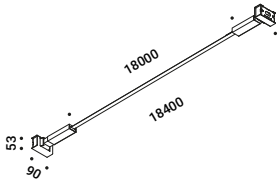


INFINITO 18  
171W  
48V DC  
2700K - 19728lm / 3000K - 20124lm  
CRI >90  
Driver not included  
CE IP20


Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A2270300.27.20  
1A2270300.30.20  
1A2270400.27.20  
1A2270400.30.20


How to order -  
INFINITO 5 TW

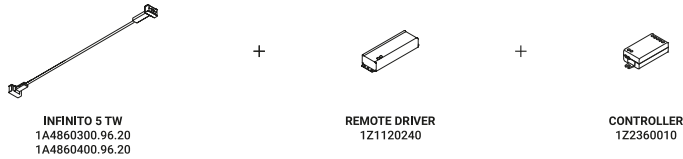

How to order -  
INFINITO 10 TW

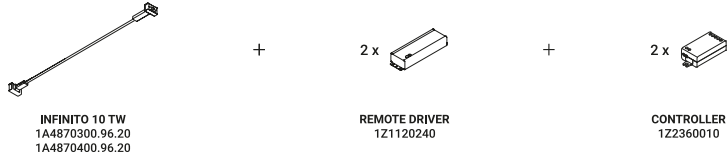


**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light.

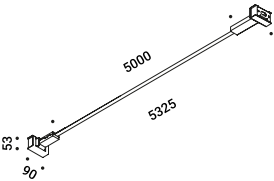

**INFINITO 5 TW**  
Tunable White  
96W  
24V DC  
2700K - 4690lm / 6500K - 5190lm  
CRI >90  
Driver not included  
CE <img alt="RoHS symbol" data-bbox="648 301 654 314"/> IP20

Matt White - 2700K / 6500K	1A4860300.96.20
Matt Black - 2700K / 6500K	1A4860400.96.20

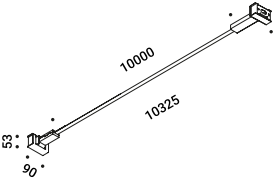









**INFINITO 10 TW**  
Tunable White  
192W  
24V DC  
2700K - 9380lm / 6500K - 10380lm  
CRI >90  
Driver not included  
CE <img alt="RoHS symbol" data-bbox="648 540 654 553"/> IP20


Matt White - 2700K / 6500K	1A4870300.96.20
Matt Black - 2700K / 6500K	1A4870400.96.20

Compulsory accessories


Drivers				
	Driver with plug			Not included
	Matt White	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	INFINITO 6	1X0060309.01.06
	Driver with plug			Not included
	Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	INFINITO 12	1X0060309.02.06
	Driver			Not included
	100-240V	48V/80W/IP67/1-10V	INFINITO 6	1Z1120400
	Driver			Not included
	100-240V	48V/150W/IP67/1-10V	INFINITO 12	1Z1120250
	Driver			Not included
	100-240V	48V/240W/IP67/1-10V	INFINITO 18	1Z1120390
	Driver			Not included
	100-240V	24V/120W/IP67/1-10V	INFINITO 5 TW / INFINITO 10 TW	1Z1120240

Compulsory accessories

Drivers			
	Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	INFINITO 6 / INFINITO 12 / INFINITO 18	1Z2170010
	Controller Casambi - Tunable White		Not included
		INFINITO 5 TW / INFINITO 10 TW	1Z2360010
Optional accessories			
Installation kits			
	Spacer		Not included
	Matt White	For driver kit with plug	INFINITO 6 / INFINITO 12 1A4930300.00.00
	Ceiling installation kit		Not included
	Matt White		1A0080300.00.00
	Kit wall connection vertical sloped 45°		Not included
	Matt White		1A0120300.00.00
	Kit wall connection sloped right 75°		Not included
	Matt White		1A0340300.00.00
	Kit wall connection sloped left 75°		Not included
	Matt White		1A0350300.00.00
	Swallows		Not included
	Matt Black		1A0290400.00.00

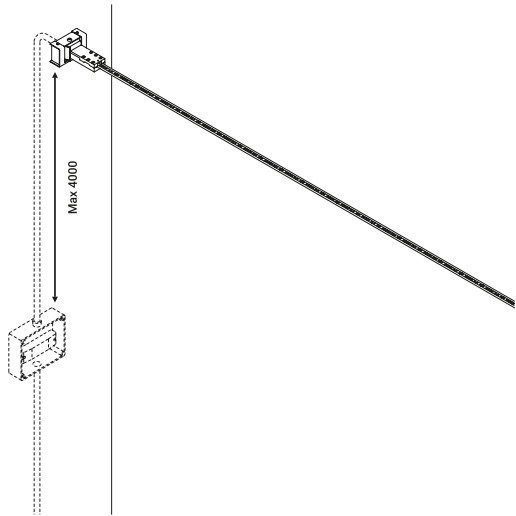


Example of installation with remote driver

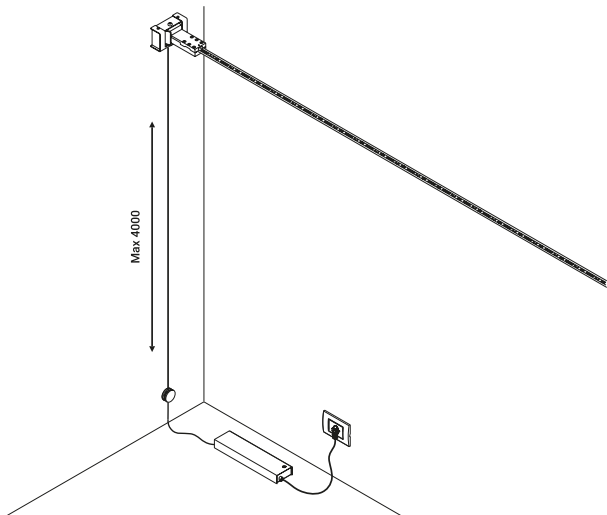


Example of installation with driver with plug






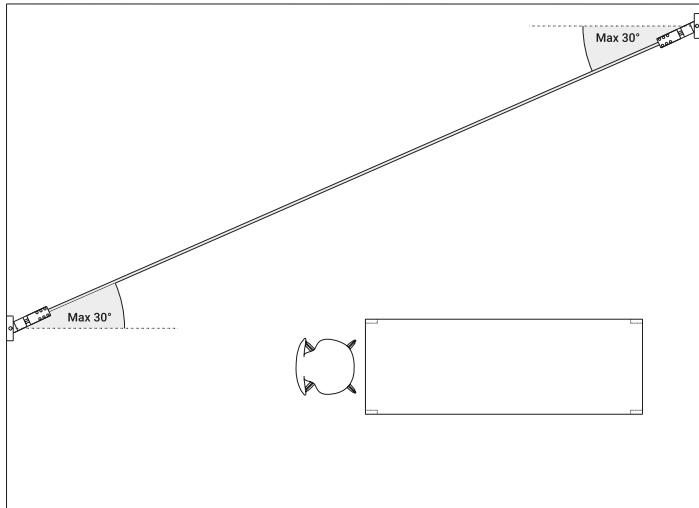


Example of installation with max rotation 30°

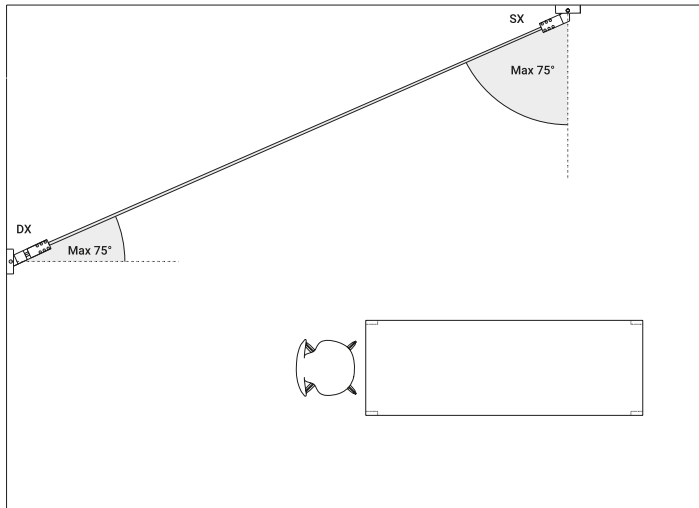


1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

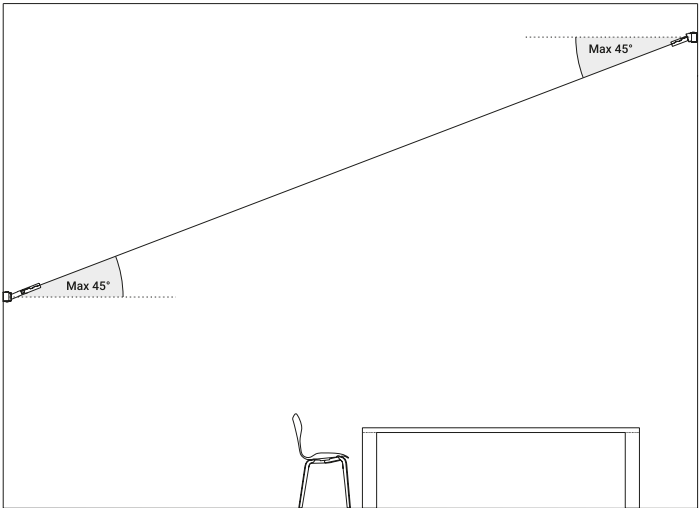

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

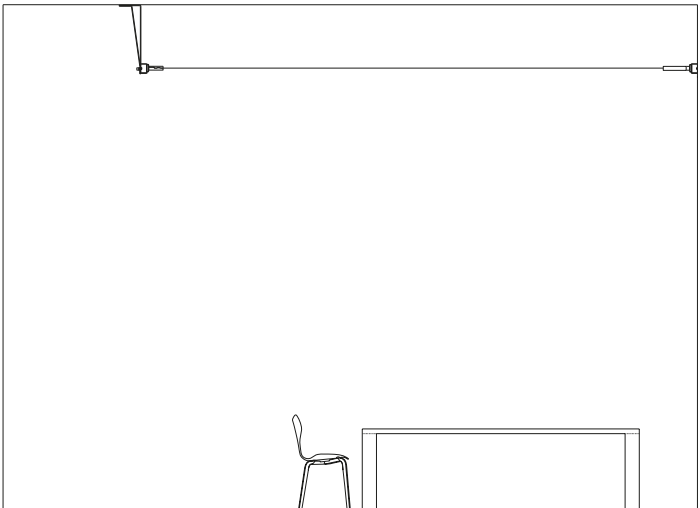

1A0080400.00.00 - Example of installation with ceiling installation kit

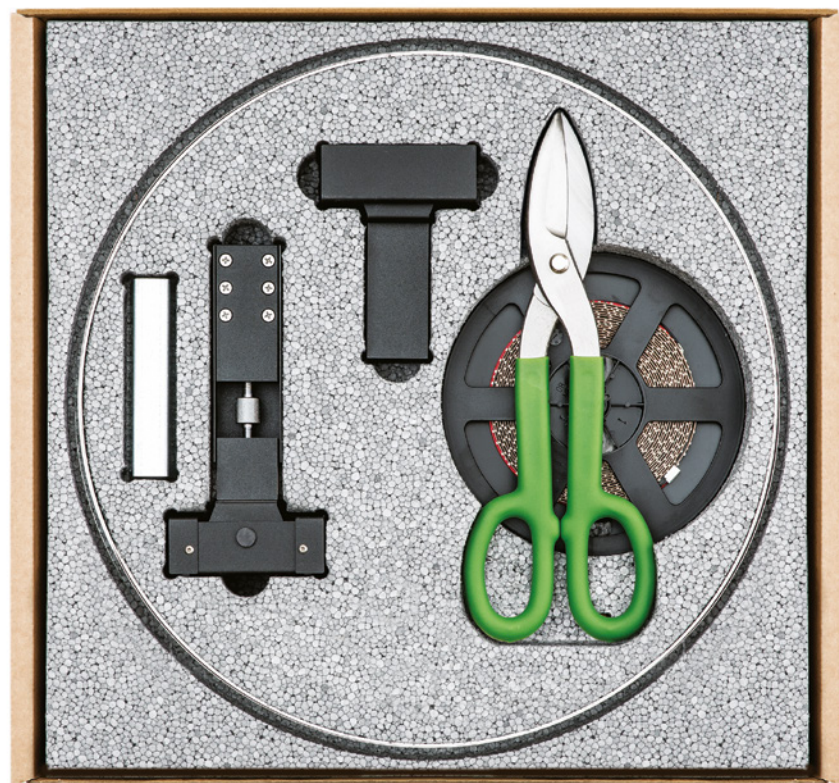










L'azienda Paolo Lenti ha creato il nuovo  
tradizionale di tappeti attraverso una moderna e  
creativa interpretazione di materiali, forme e funzioni.  
La collezione per interni e per esterni, offerta per  
tappeti e pavimenti, unifica l'arredo e il moderno  
in prodotti destinati a diventare nuovi classici grazie  
alla semplicità delle loro caratteristiche.

Funzionali e decorativi, tutti i tappeti sono personalizzati  
a mano per rispondere a necessità progettuali di diversa  
natura mantenendo sempre il filo alla sostenibilità.  
Ogni tappeto è un pezzo unico, contraddistinto dalle  
inconfondibili qualità di scelta dei colori e materiali  
difficili, tra ricami, decorazioni e lavorazioni  
particolarmente complesse, proposte da un punto  
di vista su grandi dimensioni.



Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.



Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.

Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.

Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.

Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.

Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.

Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.

Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.



Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.

Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.

Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.

Per chi desidera un tappeto con  
un design unico e personalizzato,  
l'azienda Paolo Lenti offre una  
gamma di prodotti che possono  
essere realizzati su misura per  
qualsiasi spazio e ambiente.



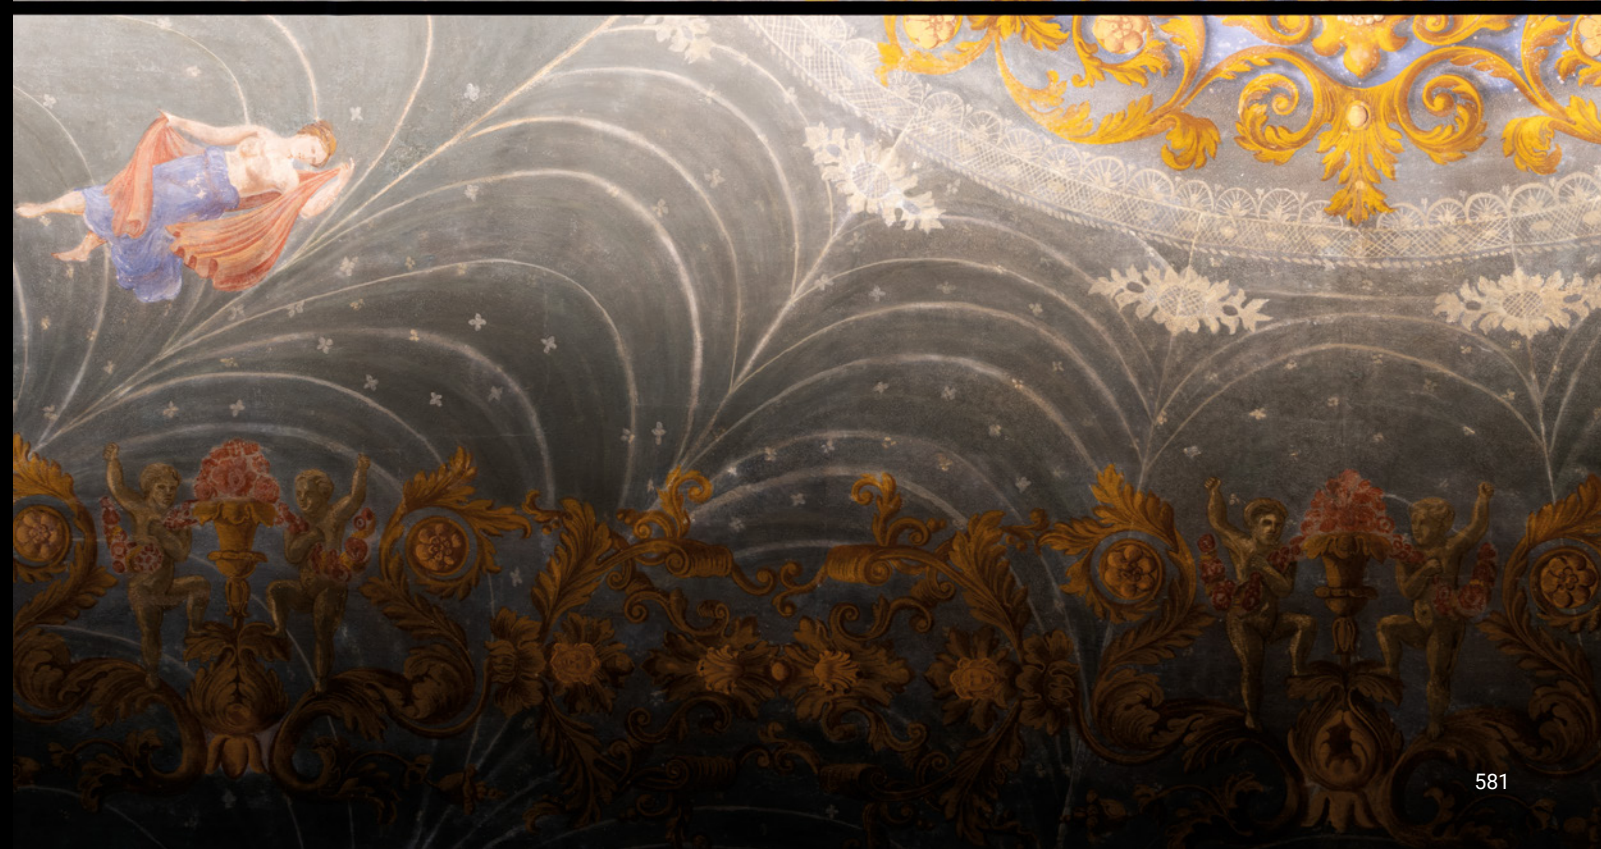



Light runs on a wire. An almost imperceptible wire, suspended in space.

Like a tightrope walker on a thin rope,  
the light reaches everywhere, weightless and wonderful.

Ohm is an electro mechanic project that takes maximum advantage  
of the characteristics of luminous diodes.

Its secret is a special unipolar wire stretched from wall to wall.

Where the light comes from is discreetly hidden,  
giving all the attention to what it is illuminating.


It is possible to replace the light source even with the luminaire assembled.

Luminaire designed also to be powered by ENDLESS conductive tape.


**Selection for ADI Design Index 2020**



Remote driver version

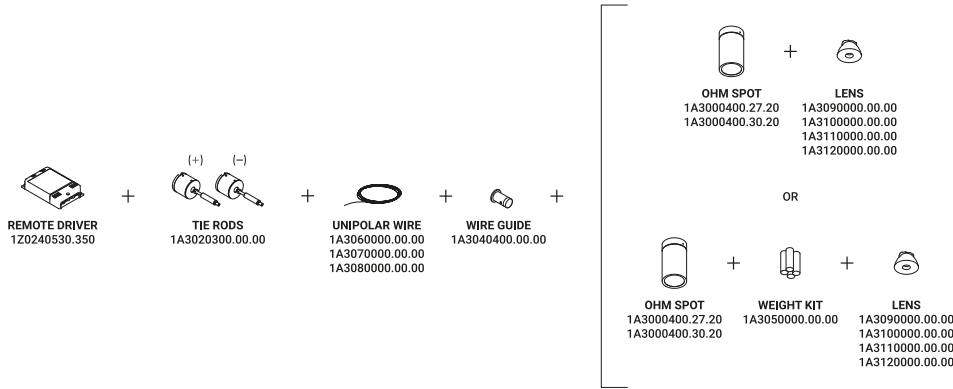


Wall/ceiling driver version

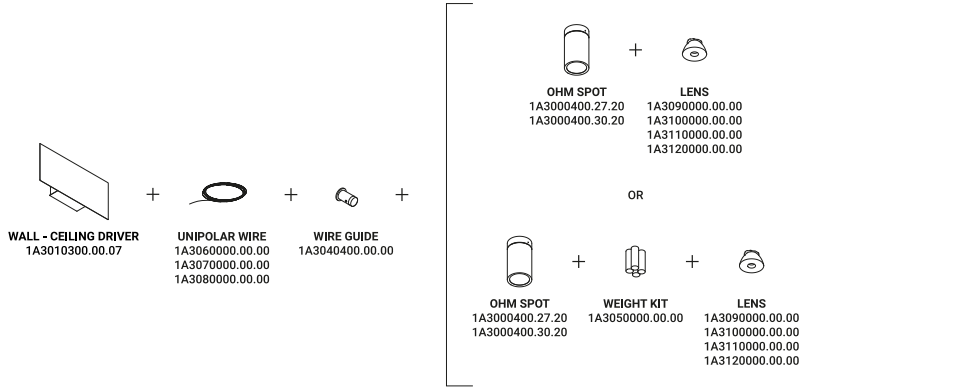

Systems / Direct / Indoor

Material Metal - PA  
Finish .04 Matt Black

Note Special unipolar wire stretched from wall to wall. Max 4 Spots. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.




OHM SPOT  
3,2W  
Max 350mA DC  
2700K / 3000K  
CRI >95  
Driver not included  
CE IP20 E

Matt Black - 2700K  
Matt Black - 3000K

1A3000400.27.20  
1A3000400.30.20

Compulsory accessories

Installation kits



Tie rods		Not included
Matt White	2 Pieces	1A3020300.00.00




Unipolar wire - 12 m		Not included
	Max 60V DC	1A3060000.00.00


Unipolar wire - 24 m		Not included
	Max 60V DC	1A3070000.00.00

Unipolar wire - 48 m		Not included
	Max 60V DC	1A3080000.00.00

Drivers



Driver		Not included
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V	1Z0240530.350



Wall/ceiling driver		Not included
Matt White	Input 100-240V - 50/60Hz Output 350mA - 18,5W - IP20 DALI - PUSH - 1-10V	1A3010300.00.07


Other accessories



Lens			Not included
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00
	3000K - CRI >95 - 288lm		
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00
	3000K - CRI >95 - 286lm		
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00
	3000K - CRI >95 - 273lm		
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00
	3000K - CRI >95 - 270lm		

Optional accessories

Installation kits



Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1A3030300.00.00




Wire guide		Not included
Matt Black	1 Piece	1X0020400.01.00




Weight kit for suspension version		Not included
	4 Pieces	1A3050000.00.00






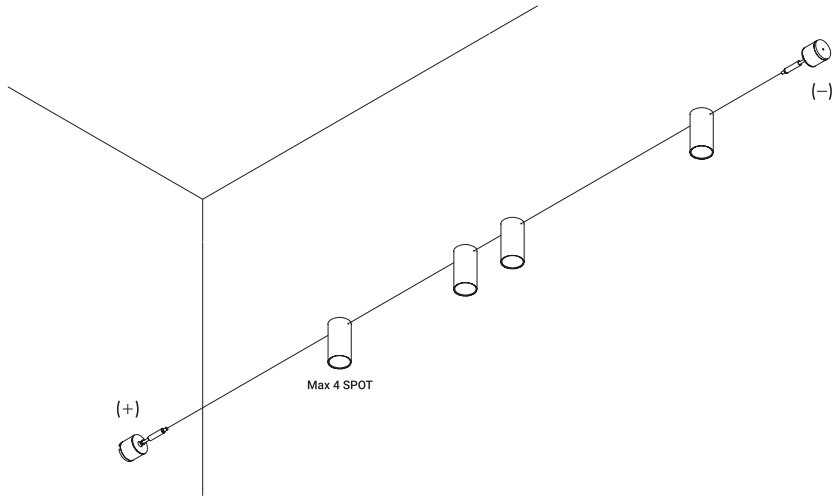

Remote driver version

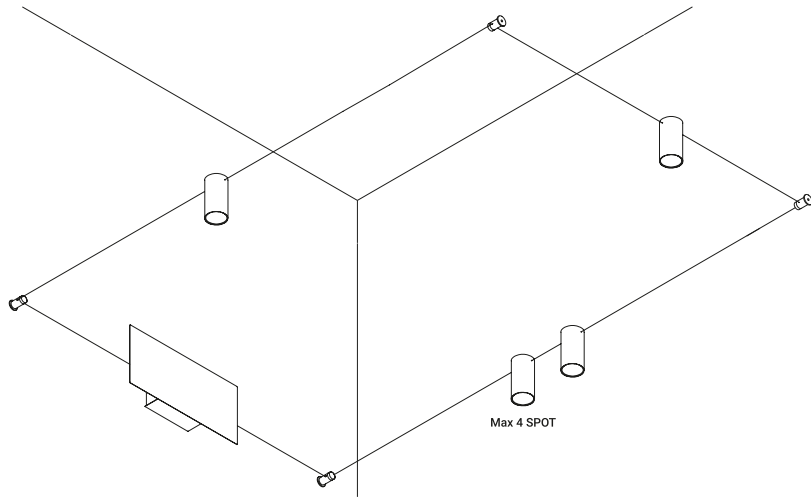

Wall/ceiling driver version

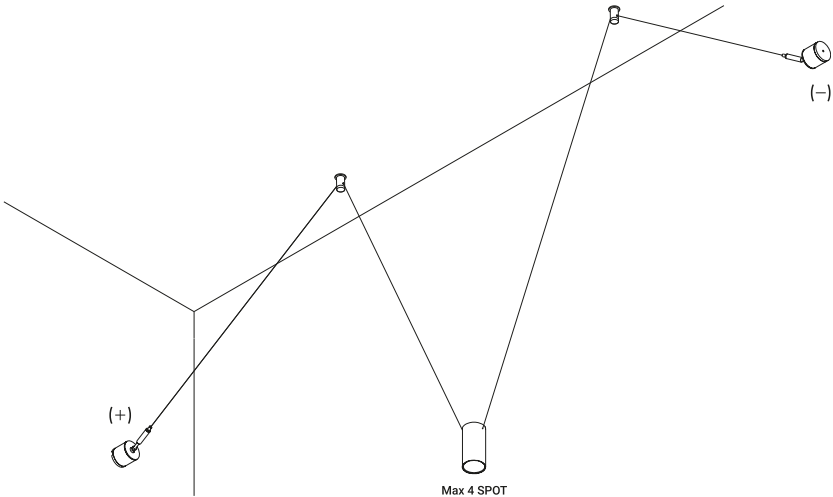

Suspension version



Metamorphosis Gallery Wunderkammer  
Mantova





Private Residence  
Berlin






## UTOPIA

Davide Groppi / 2023


Utopia is a project on the limit state of light,  
the research for the minimum dimension necessary  
for pure and essential lighting.

It represents full flexibility, in both its design and its light control.  
The light strip reaches into space, bending and drawing abstract, mysterious patterns.  
Luminaire designed also to be powered by ENDLESS conductive tape.


Linear version -  
UTOPIA 6

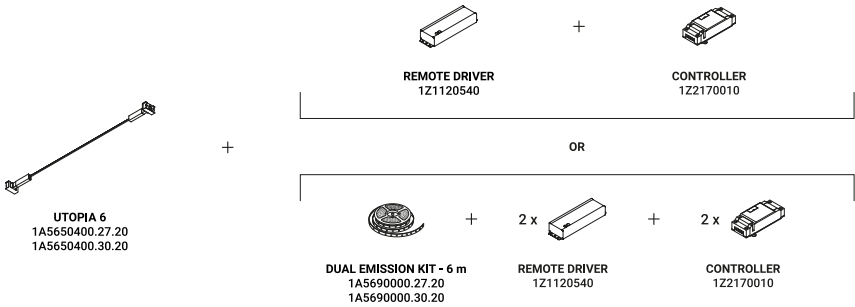

Linear version -  
UTOPIA 12

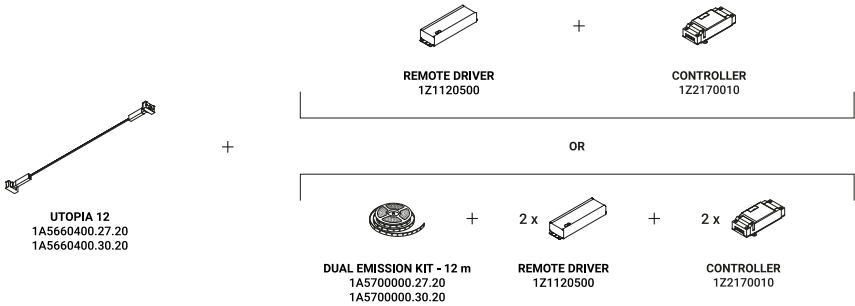


Bent version

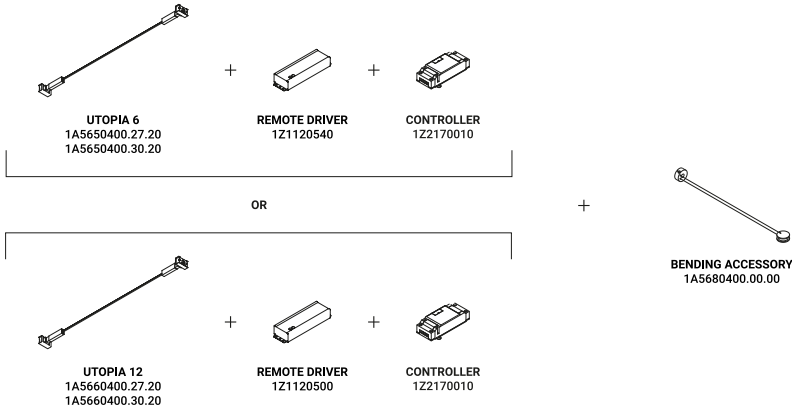

Systems / Indirect / Indoor

Material Metal - PVC  
Finish .04 Matt Black


Note Special stainless steel profile stretched from wall to wall, only 3 mm thick. Available in 6 / 12 m with a single power unit and uniform lighting. Recommended installation height is 2,3 m from the floor. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

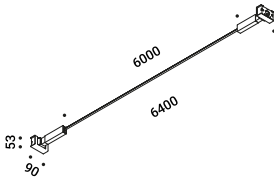

**UTOPIA 6**  
72W  
24V DC  
2700K - 6079lm / 3000K - 6322lm  
CRI >90  
Driver not included  
CE IP20 ENEC

Matt Black - 2700K  
Matt Black - 3000K

1A5650400.27.20  
1A5650400.30.20



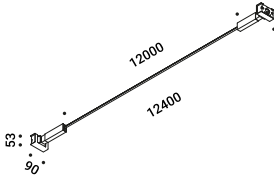


**UTOPIA 12**  
144W  
24V DC  
2700K - 10133lm / 3000K - 10538lm  
CRI >90  
Driver not included  
CE IP20 ENEC





Matt Black - 2700K  
Matt Black - 3000K

1A5660400.27.20  
1A5660400.30.20


Compulsory accessories


Drivers				
	Driver			Not included
	100-240V	24V/96W/IP67/1-10V	UTOPIA 6	1Z1120540
	Driver			Not included
	100-240V	24V/150W/IP67/1-10V	UTOPIA 12	1Z1120500
	Controller			Not included
		DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010

Optional accessories

Installation kits				
	Bending accessory			Not included
	Matt Black	Not for dual emission kits		1A5680400.00.00
	Spacer			Not included
	Matt Black	For driver kit with plug		1A4930400.00.00
	Kit wall connection sloped right 75°			Not included
	Matt Black			1A5710400.00.00
	Kit wall connection sloped left 75°			Not included
	Matt Black			1A5720400.00.00

Optional accessories

Installation kits				
	Dual emission kit - 6 m			Not included
	Standard	Input 24V DC - 72W - IP20 2700K - 6079lm - CRI >90 Not bendable	UTOPIA 6	1A5690000.27.20
	Standard	Input 24V DC - 72W - IP20 3000K - 6322lm - CRI >90 Not bendable	UTOPIA 6	1A5690000.30.20
	Dual emission kit - 12 m			Not included
	Standard	Input 24V DC - 144W - IP20 2700K - 10133lm - CRI >90 Not bendable	UTOPIA 12	1A5700000.27.20
	Standard	Input 24V DC - 144W - IP20 3000K - 10538lm - CRI >90 Not bendable	UTOPIA 12	1A5700000.30.20

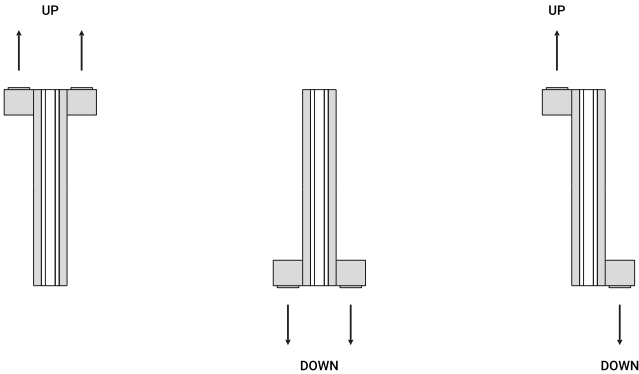


Possibilities of strip LED installation for dual emission







Example of linear installation

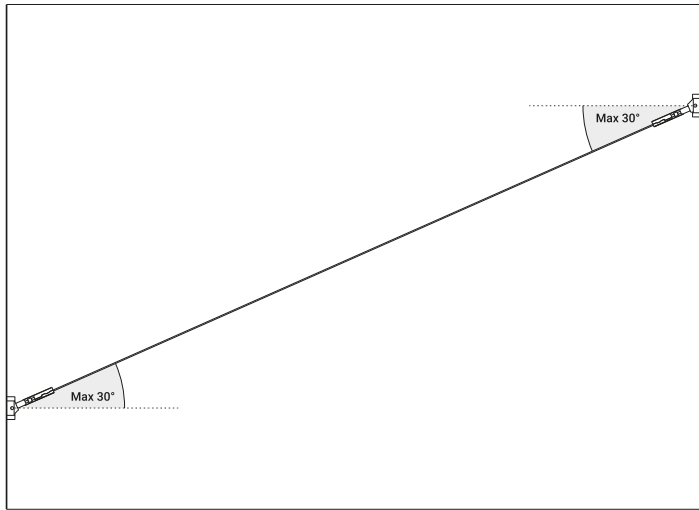


Example of installation with max rotation 30°

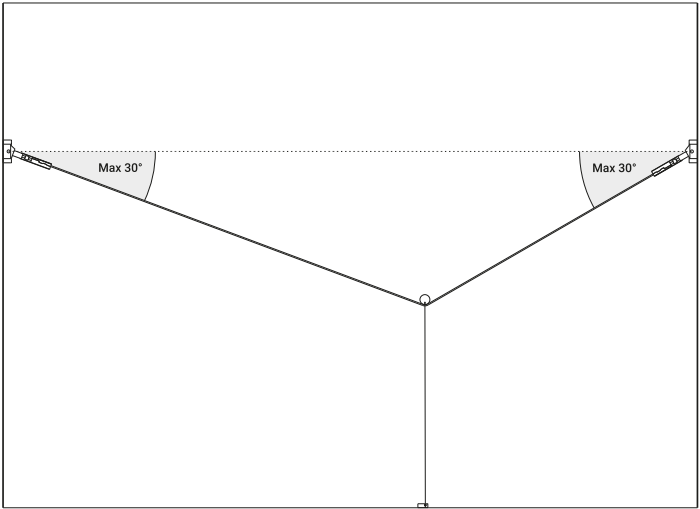


1A5680400.00.00 - Example of installation with bending accessory

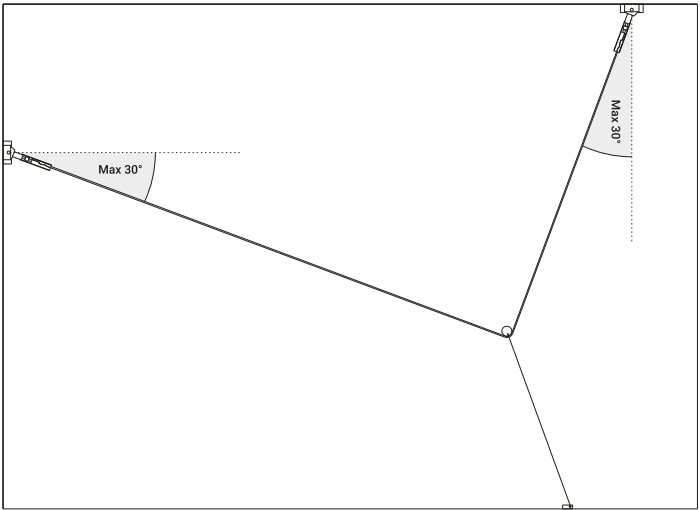


1A5680400.00.00 - Example of installation with bending accessory

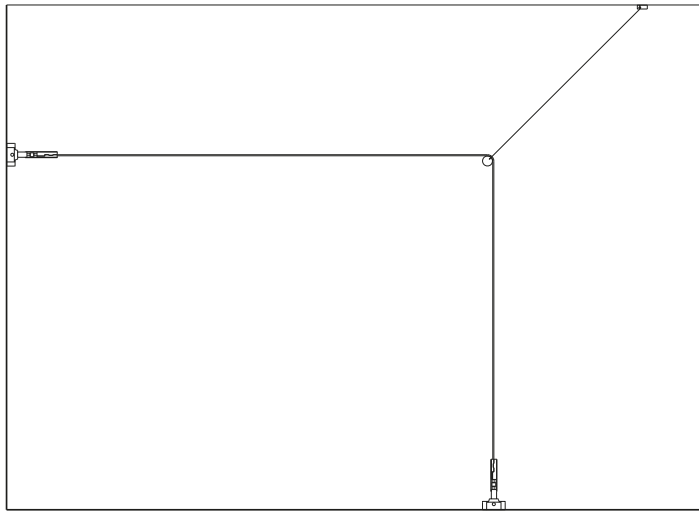

1A5680400.00.00 - Example of installation with bending accessory

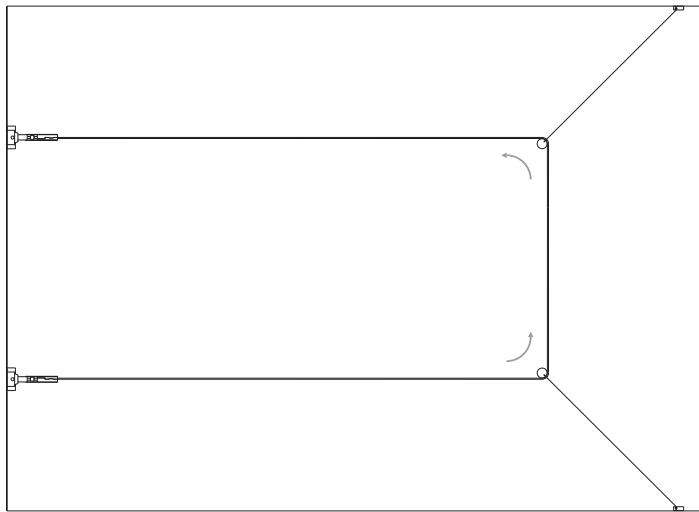

1A5680400.00.00 - Example of installation with bending accessory

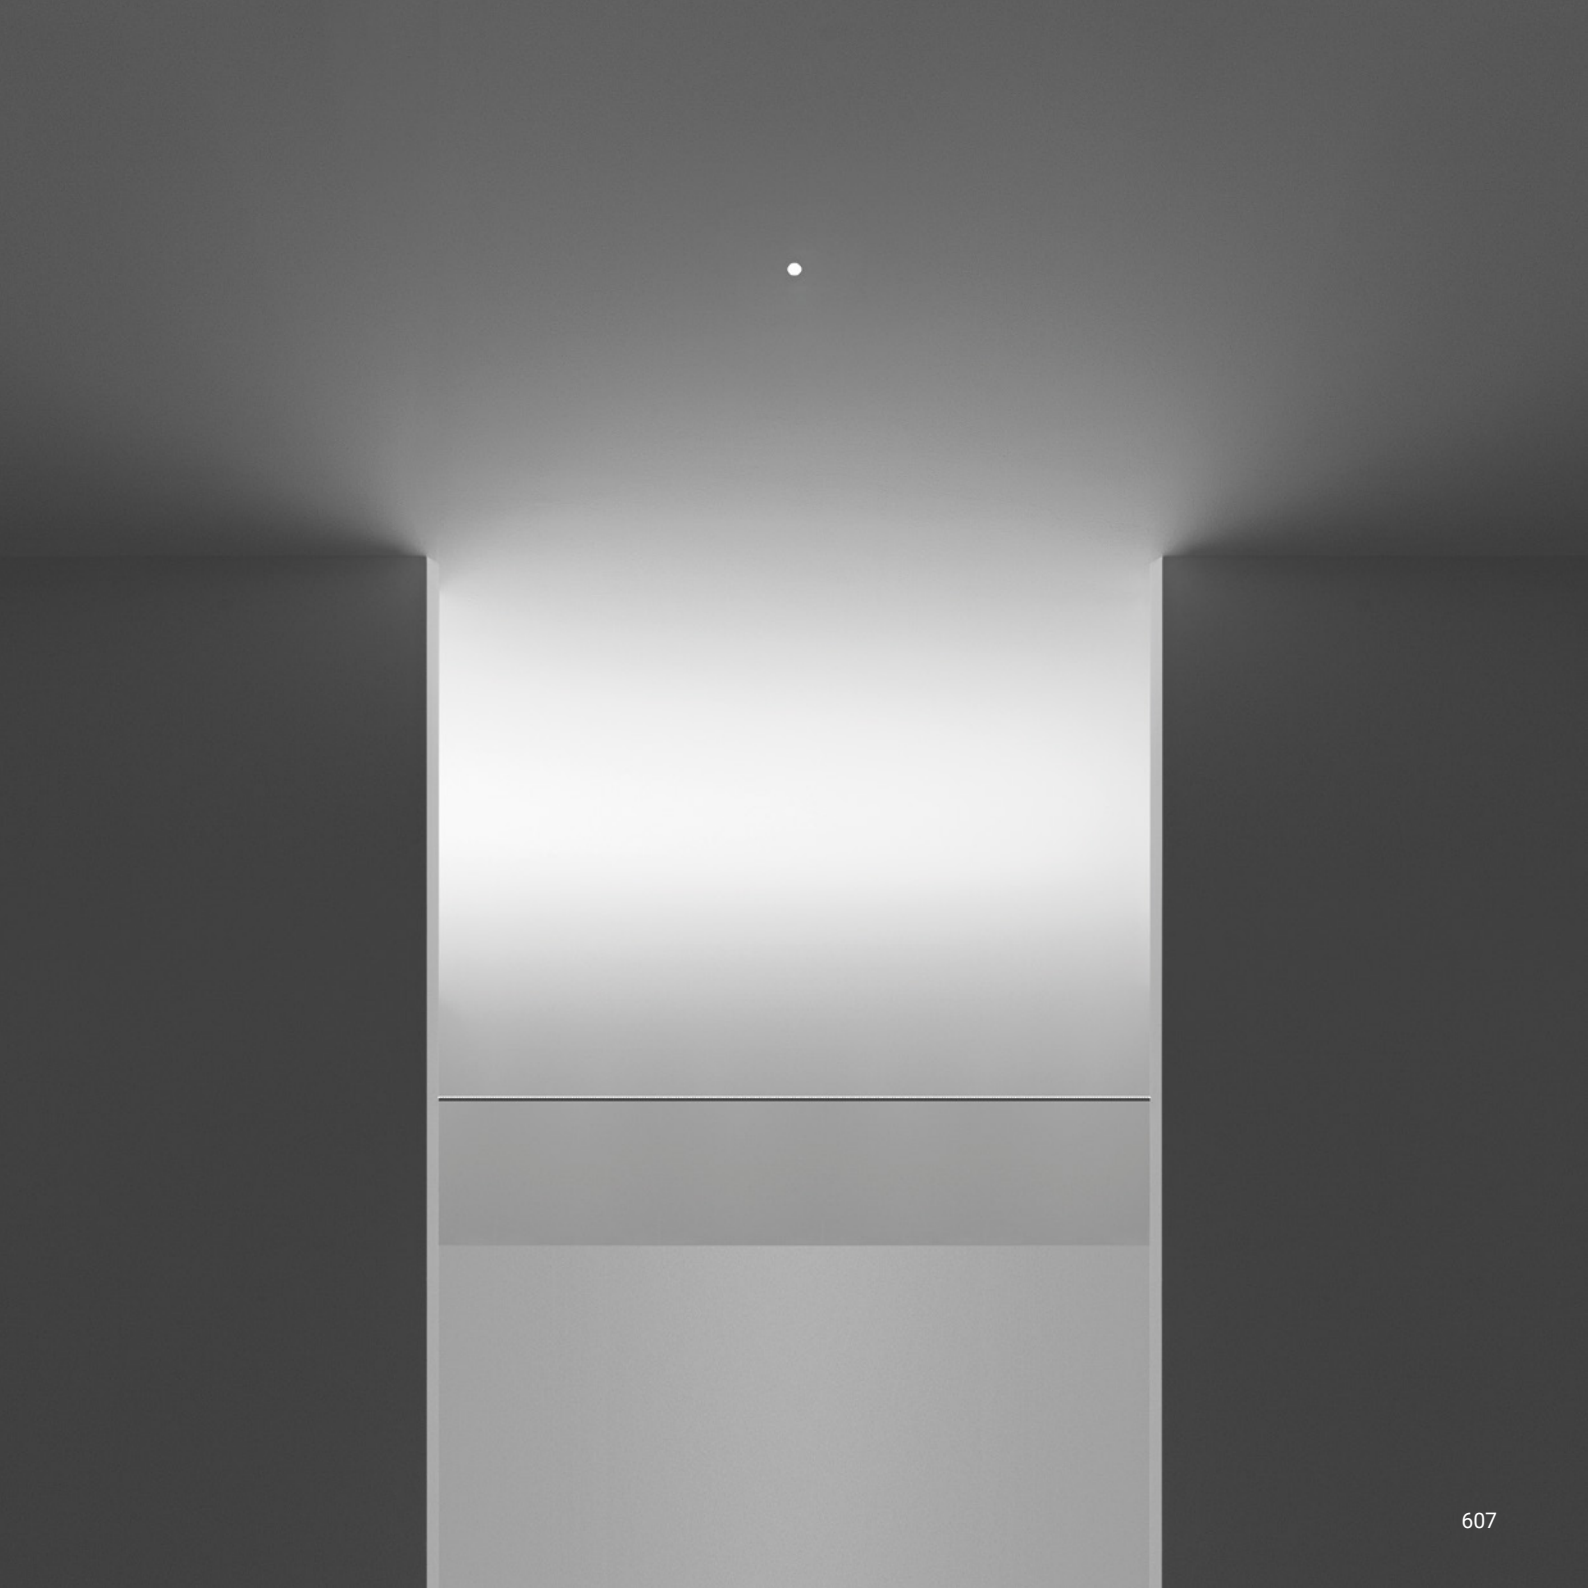



only 3 mm

**TRACKS - PROFILES**






**BINARIO TRIFASE**


/ 2007

Pure line in space.  
Our track holds the models Dot, Mira and Spot.

## Power right connector and power left connector installation

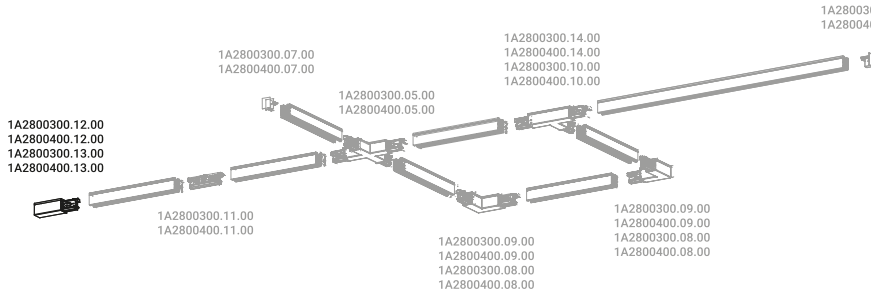

## Power intermediate connector installation

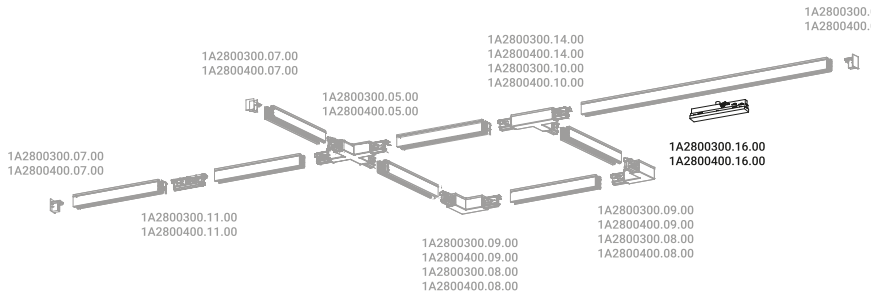


### Systems / Direct / Indoor

Material	Metal - Polycarbonate			
Finish	.03 Matt White	.04 Matt Black	.39 Matt White/Polished Gold	.49 Matt Black/Polished Gold

**Note** Ceiling and wall track system.

### Compulsory accessories

## Installation kits



Track 1 m		Not included
Matt White	1A2800300.01.00	
Matt Black	1A2800400.01.00	

Track 2 m		Not included
Matt White	1A2800300.02.00	
Matt Black	1A2800400.02.00	

Track 3 m		Not included
Matt White	1A2800300.03.00	
Matt Black	1A2800400.03.00	



End cap	Not included
Matt White	1A2800300.07.00
Matt Black	1A2800400.07.00

## Connectors



Power right connector		Not included
Matt White	1A2800300.13.00	
Matt Black	1A2800400.13.00	












Power left connector	Not included
Matt White	1A2800300.12.00
Matt Black	1A2800400.12.00



Power intermediate connector	Not included
Matt White	1A2800300.16.00
Matt Black	1A2800400.16.00

Optional accessories


Installation kits

	Linear jointing connector		Not included
	Matt White	1A2800300.11.00	
	Matt Black	1A2800400.11.00	
	Linear insulating connector		Not included
	Matt White	1A2800300.19.00	
	Matt Black	1A2800400.19.00	
	Internal L connector		Not included
	Matt White	1A2800300.09.00	
	Matt Black	1A2800400.09.00	
	External L connector		Not included
	Matt White	1A2800300.08.00	
	Matt Black	1A2800400.08.00	
	Right T connector		Not included
	Matt White	1A2800300.14.00	
	Matt Black	1A2800400.14.00	
	Left T connector		Not included
	Matt White	1A2800300.10.00	
	Matt Black	1A2800400.10.00	
	X connector		Not included
	Matt White	1A2800300.15.00	
	Matt Black	1A2800400.15.00	
	Adjustable suspension cable		Not included
	Length 1500 mm	1A2800000.04.00	
	Length 3000 mm	1A2800000.05.00	
	Length 5000 mm	1A2800000.06.00	
	Cutting tool		Not included
		1A2800000.17.00	




Compulsory accessories

Luminaires




**DOT BINARIO**  
13W  
220-240V - 50/60Hz  
2700K / 3000K  
CRI >97  
Driver integrated  
DALI  
CE IP20

Matt White - 2700K - DALI	1A2290300.27.01
Matt White - 3000K - DALI	1A2290300.30.01
Matt Black - 2700K - DALI	1A2290400.27.01
Matt Black - 3000K - DALI	1A2290400.30.01
Matt White/Polished Gold - 2700K - DALI	1A2293900.27.01
Matt White/Polished Gold - 3000K - DALI	1A2293900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A2294900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A2294900.30.01




**DOT BINARIO 51**  
Max 10W  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
CE IP20

Matt White - ON/OFF	1A3710300.00.00
Matt Black - ON/OFF	1A3710400.00.00
Matt White/Polished Gold - ON/OFF	1A3713900.00.00
Matt Black/Polished Gold - ON/OFF	1A3714900.00.00



**MIRA BINARIO**  
8W  
220-240V - 50/60Hz  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver integrated  
DALI  
CE IP20

Matt White - 2700K - DALI	1A0490300.27.01
Matt White - 3000K - DALI	1A0490300.30.01
Matt Black - 2700K - DALI	1A0490400.27.01
Matt Black - 3000K - DALI	1A0490400.30.01
Matt White/Polished Gold - 2700K - DALI	1A0493900.27.01
Matt White/Polished Gold - 3000K - DALI	1A0493900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A0494900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A0494900.30.01



**SPOT BINARIO**  
21W  
220-240V - 50/60Hz  
Driver integrated  
DALI  
LED Module not included  
CE IP20

Matt White - DALI	1A0280300.00.01
Matt Black - DALI	1A0280400.00.01
Matt White/Polished Gold - DALI	1A0283900.00.01
Matt Black/Polished Gold - DALI	1A0284900.00.01



Compulsory accessories

Other accessories

LED modules



Lens		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT BINARIO	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT BINARIO	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT BINARIO	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT BINARIO	1A3120000.00.00
	3000K - CRI >97 - 1016lm		



DG111 LED module		Not included	
	16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	SPOT BINARIO	1A4700000.27.20
	16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable		



DG111 LED module		Not included	
	16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	SPOT BINARIO	1A3890000.27.20
	16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable		



DG111 LED module		Not included	
	16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	SPOT BINARIO	1A3900000.27.20
	16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable		

Optional accessories

Other accessories



Accessory holder + Honeycomb louvre		Not included	
		DOT BINARIO	1X0080400.01.00



Elliptical filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.02.00



Blue filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.03.00



Red filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.04.00



Yellow filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.05.00

Optional accessories

Bulbs



LED - GU10 - PAR16			Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y0330500	




LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580210	




LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580010	


Other accessories



Darklight			Not included
LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580040	



25° beam filter			Not included
LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580020	



36° beam filter			Not included
LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580030	

Optional accessories

Other accessories



Accessory holder + Soft filter + Honeycomb louvre			Not included
Matt Black	SPOT BINARIO	1X0070400.04.00	



Accessory holder + Elliptical filter			Not included
Matt Black	SPOT BINARIO	1X0070400.05.00	




Blue filter			Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.06.00




Red filter			Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.07.00



Yellow filter			Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.08.00




Directional fins			Not included
Matt Black	SPOT BINARIO	1X0070400.01.00	



Cylindrical screen			Not included
Matt Black	SPOT BINARIO	1X0070400.02.00	



Cone 45°			Not included
Matt Black	SPOT BINARIO	1X0070400.03.00	

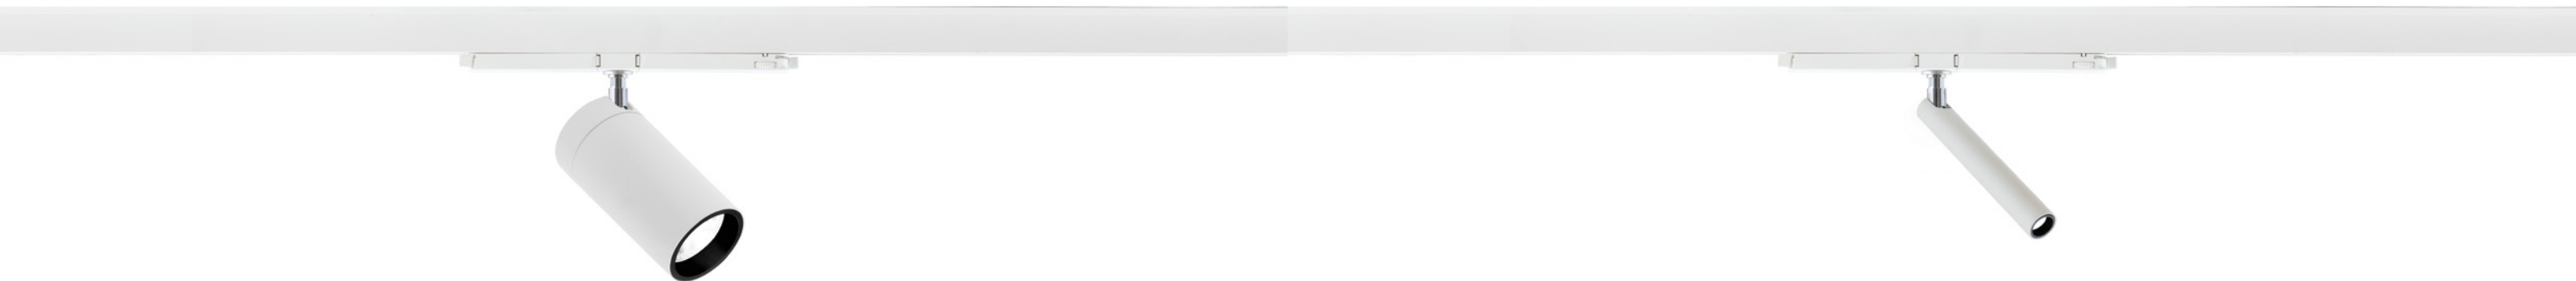









A minimal track system with tiny lights, small hummingbirds that perch where needed.  
Luminaire designed also to be powered by ENDLESS system.

Layout example of wall and ceiling version

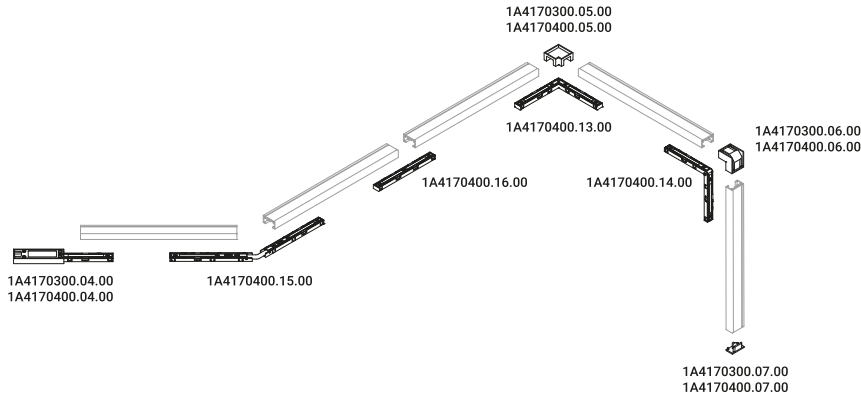

Layout example of recessed version

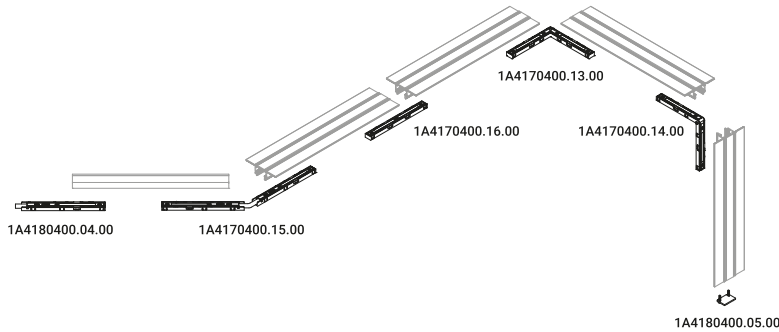


Systems / Direct / Indoor

Material Metal - Polycarbonate  
Finish .04 Matt Black

Note Ceiling and wall track system operating at 48V DC. Possibility for the luminaire to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

Compulsory accessories


Installation kits for wall and ceiling track



Wall and ceiling track - 1 m	Not included
Matt White	1A4170300.01.00
Matt Black	1A4170400.01.00

Wall and ceiling track - 2 m	Not included
Matt White	1A4170300.02.00
Matt Black	1A4170400.02.00

Wall and ceiling track - 3 m	Not included
Matt White	1A4170300.03.00
Matt Black	1A4170400.03.00




Power connector	Not included
Matt White	1A4170300.04.00
Matt Black	1A4170400.04.00



End cap	Not included
Matt White	1A4170300.07.00
Matt Black	1A4170400.07.00

Compulsory accessories

Installation kits for recessed track



Recessed wall and ceiling track - 1 m		Not included
Matt Black	1A4180400.01.00	



Recessed wall and ceiling track - 2 m		Not included
Matt Black	1A4180400.02.00	




Recessed wall and ceiling track - 3 m		Not included
Matt Black	1A4180400.03.00	


Power connector		Not included
Matt Black	For recessed track	1A4180400.04.00

End cap		Not included
Matt Black	For recessed track	1A4180400.05.00

Drivers

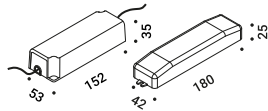

Driver with optoisolator		Not included
Input 100-240V - 50/60Hz Output 48V - 60W - IP20 - DALI		1A4170000.19.00

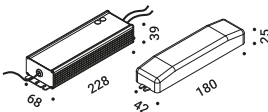

Driver with optoisolator		Not included
Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI		1A2810000.11.00



Optional accessories


Installation kits for wall and ceiling track




Corner joint cover H		Not included
Matt White	For wall and ceiling track	1A4170300.05.00
Matt Black	For wall and ceiling track	1A4170400.05.00



Corner joint cover V		Not included
Matt White	For wall and ceiling track	1A4170300.06.00
Matt Black	For wall and ceiling track	1A4170400.06.00




Cover - 3 m		Not included
Matt White	For wall and ceiling track	1A4170300.08.00
Matt Black	For wall and ceiling track	1A4170400.08.00



Endless connector		Not included
Standard	For wall and ceiling track	1A4170000.20.00


Installation kits for recessed track




Cover - 3 m		Not included
Matt White	For recessed track	1A4180300.08.00
Matt Black	For recessed track	1A4180400.08.00

Optional accessories


Installation kits



L connector		Not included
Matt Black		1A4170400.13.00




Ceiling-wall connector		Not included
Matt Black		1A4170400.14.00



Flexible joint		Not included
Matt Black		1A4170400.15.00




Linear connector		Not included
Matt Black		1A4170400.16.00



Locking tool		Not included
Standard		1A4170000.17.00

Other accessories




Shelf		Not included
Matt Black	For wall and ceiling track	1A4170400.21.00



Compulsory accessories


Luminaires



**COLIBRÌ 18 - 15°**  
2W  
48V DC  
2700K - 81lm / 3000K - 84lm  
CRI >90  
Beam 15°  
Driver integrated  
DALI  
CE IP20 ENEC

Matt Black - 2700K - DALI  
Matt Black - 3000K - DALI


1A4260400.27.01  
1A4260400.30.01



**COLIBRÌ 18 - 25°**  
2W  
48V DC  
2700K - 79lm / 3000K - 81lm  
CRI >90  
Beam 25°  
Driver integrated  
DALI  
CE IP20 ENEC

Matt Black - 2700K - DALI  
Matt Black - 3000K - DALI


1A4270400.27.01  
1A4270400.30.01



**COLIBRÌ 28 - 15°**  
4W  
48V DC  
2700K - 147lm / 3000K - 151lm  
CRI >90  
Beam 15°  
Driver integrated  
DALI  
CE IP20 ENEC

Matt Black - 2700K - DALI  
Matt Black - 3000K - DALI

1A4280400.27.01  
1A4280400.30.01



**COLIBRÌ 28 - 25°**  
5W  
48V DC  
2700K - 250lm / 3000K - 258lm  
CRI >90  
Beam 25°  
Driver integrated  
DALI  
CE IP20 ENEC

Matt Black - 2700K - DALI  
Matt Black - 3000K - DALI

1A4290400.27.01  
1A4290400.30.01




Metamorphosis Gallery Wunderkammer  
Mantova



Al Gatto Verde Restaurant  
Modena






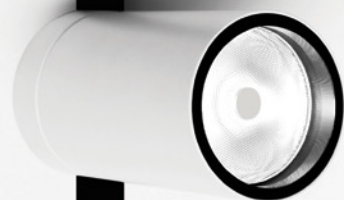

Plasterboard track for recessed installation.  
It is designed for use with state-of-the-art LED modules  
to create a wide range of light beams.

Layout example

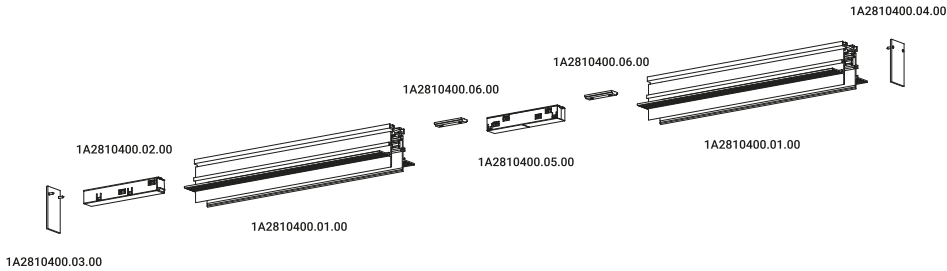


Systems / Direct / Indoor

Material	Metal - Polycarbonate		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold

Note Recessed track system operating at 48V DC.

Compulsory accessories

Installation kits



Plasterboard track 12,5 mm		Not included
Matt Black	48V DC - Max 15A Length 2000 mm Cut-out 2000x26 mm	1A2810400.01.00



Power connector		Not included
Matt Black	Output 48V - Max 15A	1A2810400.02.00






End cap for power connector		Not included
Matt Black		1A2810400.03.00



End cap		Not included
Matt Black		1A2810400.04.00

Compulsory accessories

	Driver		Not included
	100-240V	48V/150W/IP67/1-10V	1Z1120250
	Driver with optoisolator		Not included
		Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI	1A2810000.11.00
	Driver with optoisolator		Not included
		Input 100-240V - 50/60Hz Output 48V - 320W - IP20 - DALI	1A2810000.12.00

Optional accessories


Installation kits



Linear connector		Not included
Matt Black	Output 48V - Max 15A	1A2810400.05.00




Reinforcing bracket		Not included
Matt Black		1A2810400.06.00



Clamp with M6 grippe		Not included
		1A2810000.07.00



Suspension set		Not included
		1A2810000.08.00




Plaster installation guard		Not included
	Length 2000 mm	1A2810000.09.00



Cutting tool		Not included
		1A2800000.17.00

Compulsory accessories

Luminaires



DOT FRAMELESS

13W

48V DC

2700K / 3000K

CRI >97

Driver integrated

DALI

CE IP20

Matt White - 2700K - DALI

Matt White - 3000K - DALI

Matt Black - 2700K - DALI

Matt Black - 3000K - DALI

Matt Black/Polished Gold - 2700K - DALI

Matt Black/Polished Gold - 3000K - DALI

1A0090300.27.01

1A0090300.30.01

1A0090400.27.01

1A0090400.30.01

1A0094900.27.01

1A0094900.30.01


Other accessories




Lens		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT FRAMELESS	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT FRAMELESS	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT FRAMELESS	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT FRAMELESS	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

Optional accessories


Other accessories




Accessory holder + Honeycomb louvre		Not included	
		DOT FRAMELESS	1X0080400.01.00




Elliptical filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.02.00



Blue filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.03.00




Red filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.04.00



Yellow filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.05.00




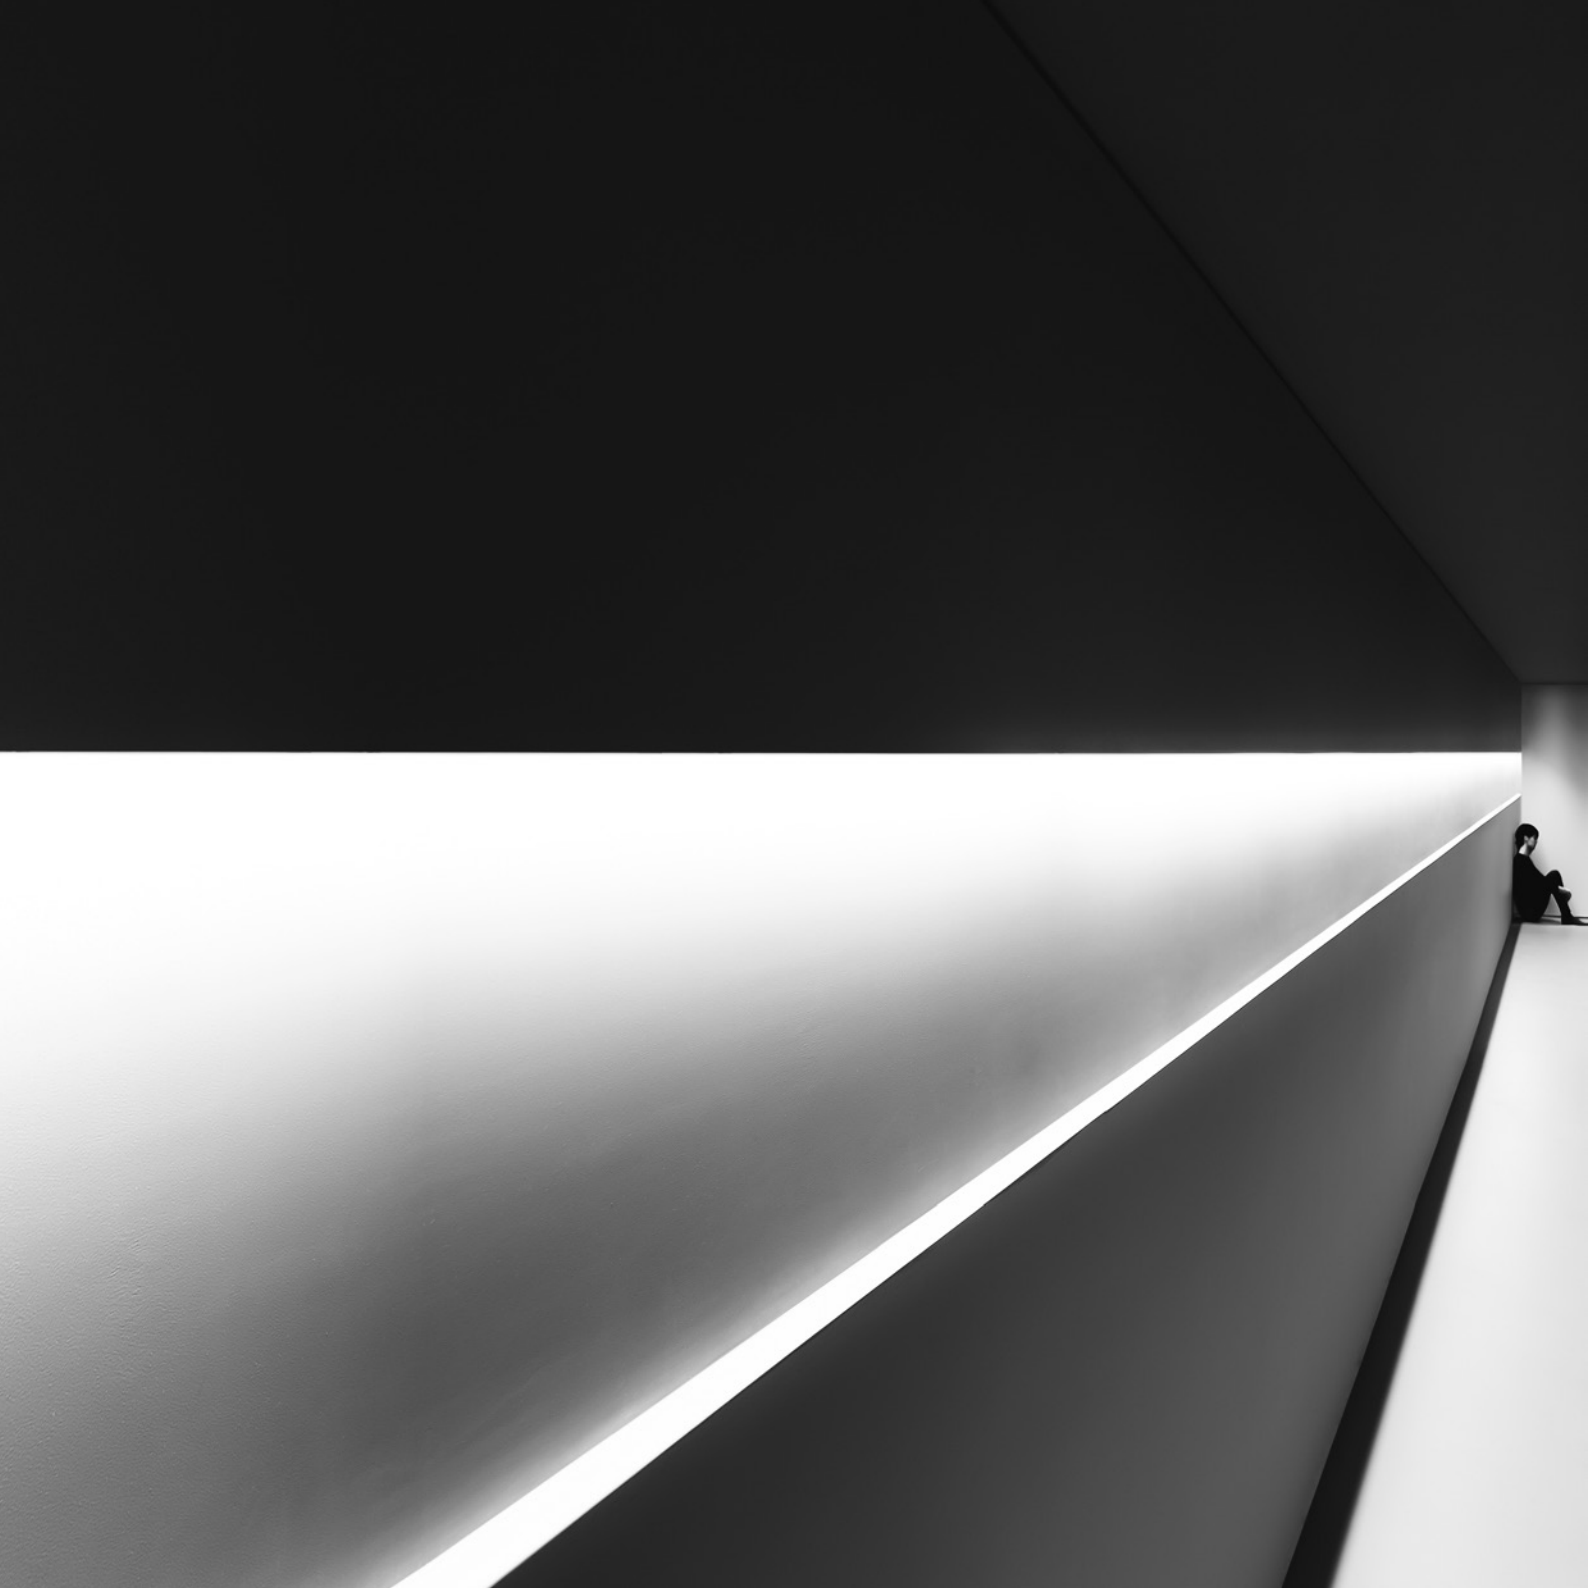








Profiles designed to create projects with continuous light.


Systems / Direct / Indoor	
Material	Metal
Finish	.00 Standard
Note	Profile with continuous light.

Compulsory accessories

Installation kits		
	Aluminium profile 2 m	Not included
	Standard With opal cover	1A4970000.01.00
	Cap	Not included
	Standard	1A4970000.02.00
	Fixing spring	Not included
	Standard	1A4970000.03.00

Compulsory accessories

LED modules		
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20
Drivers		
	Driver	Not included
	100-240V 24V/80W/IP20/ON/OFF	1Z1120440
	Driver	Not included
	100-240V 24V/96W/IP67/1-10V	1Z1120540
	Driver	Not included
	100-240V 24V/150W/IP67/1-10V	1Z1120500
	Controller	Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010
















Systems / Direct / Indoor		
Material	Metal	
Finish	.00 Standard	
Note	Profile with continuous light.	

Compulsory accessories

Installation kits		
	Aluminium profile 2 m	Not included
	Standard With opal cover	1A4970000.04.00
	Cap	Not included
	Standard	1A4970000.05.00
	Fixing spring	Not included
	Standard	1A4970000.06.00

Compulsory accessories

LED modules		
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20
Drivers		
	Driver	Not included
	100-240V 24V/80W/IP20/ON/OFF	1Z1120440
	Driver	Not included
	100-240V 24V/96W/IP67/1-10V	1Z1120540
	Driver	Not included
	100-240V 24V/150W/IP67/1-10V	1Z1120500
	Controller	Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010

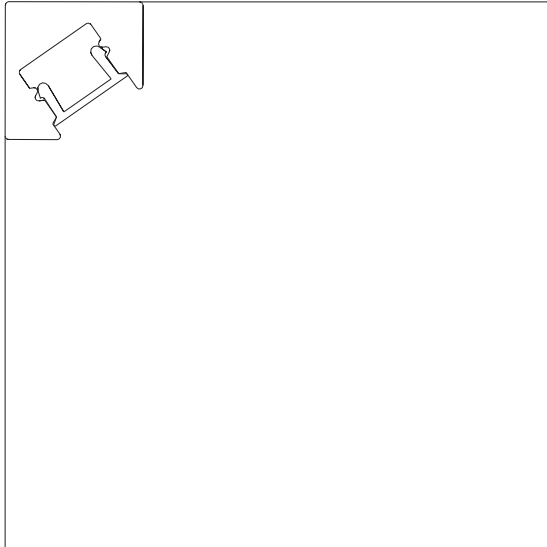



Systems / Direct / Indoor	
Material	Metal
Finish	.00 Standard
Note	Profile with continuous light.


Compulsory accessories

Installation kits		
	Aluminium profile 2 m	Not included
	Standard	1A4970000.07.00
	Opal cover 2 m	Not included
	Standard	1A4970000.08.00
	Transparent cover 2 m	Not included
	Standard	1A4970000.09.00
	Satin cover 2 m	Not included
	Standard	1A4970000.10.00
	Cap	Not included
	Standard	1A4970000.11.00
	Adhesive 1 m	Not included
	Standard	1A4970000.12.00
	Adhesive magnet 1 m	Not included
	Standard	1A4970000.13.00

Compulsory accessories

LED modules		
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.30.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A5000000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A5000000.30.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A5000000.30.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A5000000.30.20
Drivers		
	Driver	Not included
	100-240V 24V/80W/IP20/ON/OFF	1Z1120440
	Driver	Not included
	100-240V 24V/96W/IP67/1-10V	1Z1120540
	Driver	Not included
	100-240V 24V/150W/IP67/1-10V	1Z1120500
	Controller	Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010
















## LIGHTLINE RECESSED

/ 2023

Recessed profiles designed to create projects with continuous light.

Systems / Direct / Indoor	
Material	Metal
Finish	.00 Standard
Note	Recessed profile with continuous light.



Compulsory accessories

Installation kits		
	Aluminium profile 2 m	Not included
	Standard	1A4970000.14.00
	Opal cover 2 m	Not included
	Standard	1A4970000.08.00
	Transparent cover 2 m	Not included
	Standard	1A4970000.09.00
	Satin cover 2 m	Not included
	Standard	1A4970000.10.00
	Cap	Not included
	Standard	1A4970000.15.00
	Fixing spring	Not included
	Standard	1A4970000.16.00
	Formwork kit 2 m	Not included
	Standard	1A4970000.17.00

Compulsory accessories

LED modules		
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 19,2W/m - IP20 3000K - 2340lm/m - CRI >80	1A4990000.30.20
	Strip LED - 5 m - IP65	Not included
	Input 24V DC - 14,4W/m - IP65 2700K - 1420lm/m - CRI >82	1A5000000.27.20
	Strip LED - 5 m - IP65	Not included
	Input 24V DC - 14,4W/m - IP65 3000K - 1575lm/m - CRI >82	1A5000000.30.20
Drivers		
	Driver	Not included
	100-240V 24V/80W/IP20/ON/OFF	1Z1120440
	Driver	Not included
	100-240V 24V/96W/IP67/1-10V	1Z1120540
	Driver	Not included
	100-240V 24V/150W/IP67/1-10V	1Z1120500
	Controller	Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010



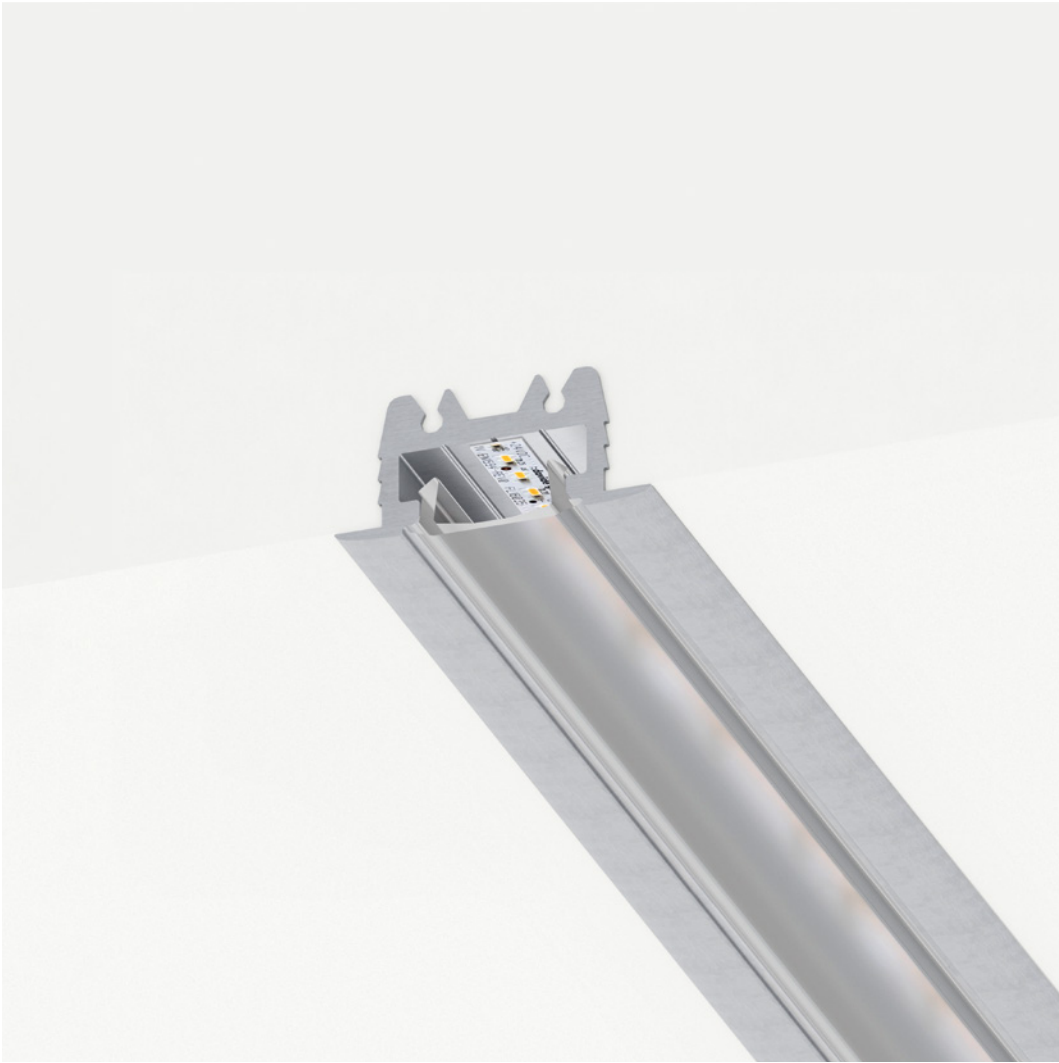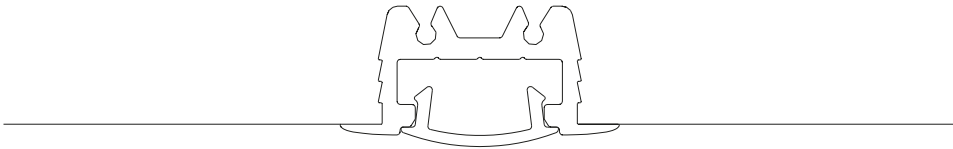




Systems / Direct / Indoor	
Material	Metal
Finish	.00 Standard
Note	Recessed profile with continuous light.

Compulsory accessories

Installation kits



Aluminium profile 2 m

Standard

Not included

1A4970000.18.00

Opal cover 2 m

Standard

Not included

1A4970000.19.00

Compulsory accessories

LED modules

Strip LED - 5 m - IP20		Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20

Strip LED - 5 m - IP20		Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20
	Input 24V DC - 14,4W/m - IP20 3000K - 1575lm/m - CRI >80	1A4980000.30.20

Strip LED - 5 m - IP20		Not included
	Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20
	Input 24V DC - 19,2W/m - IP20 3000K - 2340lm/m - CRI >80	1A4990000.30.20

Strip LED - 5 m - IP65		Not included
	Input 24V DC - 14,4W/m - IP65 2700K - 1420lm/m - CRI >82	1A5000000.27.20
	Input 24V DC - 14,4W/m - IP65 3000K - 1575lm/m - CRI >82	1A5000000.30.20


Drivers

Driver		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440

Driver		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540

Driver		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500

Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010

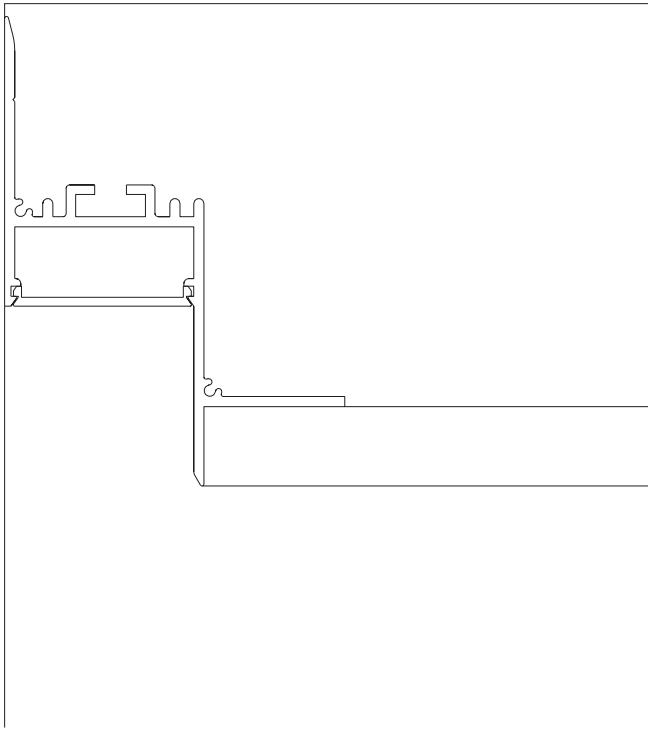





**OUTDOOR**





## BELLADINOTTE

Maurizio Mancini / 2012

The magic of the mirror brought into the garden.  
A study of camouflage. The reflective surface is used as a tool  
to camouflage and hide the machine to create light.  
The reflection of the environment makes the luminaire invisible.




BELLADINOTTE

Maurizio Mancini / 2012

Floor / Indirect / Outdoor

Material Metal  
Finish .00 Standard

Note Outdoor lamp with spike. Adjustable along the vertical axis. Plane with mirror finish. Matt green mirror finish rear plane. Black cable (5 m).



BELLADINOTTE

2x4,2W  
24V DC  
2700K - 2x262lm / 3000K - 2x282lm  
CRI >90  
Driver not included

CE IP67

Standard - 2700K  
Standard - 3000K

1A3560000.27.20  
1A3560000.30.20

Compulsory accessories

Drivers			Not included
	Driver		
	110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories

Installation kits			Included
	Driver connector IP68		
	1 Piece		1A1660000.00.00







## BUBKA

Daniele Sprega / 2014

A perfect tool to make outdoor light.  
The light as a tool for guiding people along a path.

-Floor / Direct / Outdoor	
Material	AISI 316L Stainless Steel - Metal
Finish	.00 Standard
Note	Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (7 m).



BUBKA

8,4W  
Max 700mA DC  
2700K - 639lm / 3000K - 639lm  
CRI >90  
Driver not included




Standard - 2700K  
Standard - 3000K

1A3600000.27.20  
1A3600000.30.20

Compulsory accessories

Drivers




Driver		Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110

Optional accessories

Installation kits




Driver connector IP68		Included
1 Piece		1A1660000.00.00



Anchoring bolt		Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm		1A3620000.00.00

Lighting modules



Additional LED head		Not included
Matt Black	Max 700mA DC - 8,4W 3000K - 639lm - CRI >90	1A3610400.30.20
	Max 700mA DC - 8,4W 2700K - 639lm - CRI >90	1A3610400.27.20







**BUBKA BOLLARD**

Daniele Sprega / 2021


A perfect tool to make outdoor light.  
The light as a tool for guiding people along a path.



BUBKA BOLLARD

Daniele Sprega / 2021

-Floor / Direct / Outdoor	
Material	AISI 316L Stainless Steel - Metal
Finish	.00 Standard
Note	Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (9 m).



BUBKA BOLLARD

8,4W  
Max 700mA DC  
2700K - 350lm / 3000K - 350lm  
CRI >90  
Driver not included



Standard - 2700K  
Standard - 3000K


1A1440000.27.20  
1A1440000.30.20

BUBKA BOLLARD

Daniele Sprega / 2021

Compulsory accessories

Drivers




Driver		Not included
220-240V(100-127V)	350mA/17W(15W)/IP68/ON/OFF	1Z0240880

Optional accessories

Installation kits




Driver connector IP68		Included
	1 Piece	1A1660000.00.00



Anchoring bolt		Not included
	Cut-out Ø 250 mm Minimum space for mounting 350 mm	1A3620000.00.00

Lighting modules



Additional LED head		Not included
Matt Black	Max 700mA DC - 8,4W 2700K - 639lm - CRI >90	1A3610400.27.20
	Max 700mA DC - 8,4W 3000K - 639lm - CRI >90	1A3610400.30.20




A small black dot reveals its function only when necessary.  
For us the secret of light lies not in its shape, or in some technical virtuosity,  
but in the choice and assumption of a method, the method of amazement and memory.

Recessed / Direct / Outdoor

Material Metal  
Finish .04 Matt Black


Note Outdoor luminaire. Available with transparent or black glass.  
Black cable (1 m).



**BUIO TRIM - 13°**  
Black filter  
6W  
24V DC  
2700K - 93lm / 3000K - 93lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5120400.27.20  
1A5120400.30.20



**BUIO TRIM - 25°**  
Black filter  
6W  
24V DC  
2700K - 158lm / 3000K - 158lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5140400.27.20  
1A5140400.30.20



**BUIO TRIM - 32°**  
Black filter  
6W  
24V DC  
2700K - 144lm / 3000K - 144lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5130400.27.20  
1A5130400.30.20




**BUIO TRIM ELLIPTICAL**  
Black filter  
6W  
24V DC  
2700K - 91lm / 3000K - 91lm  
CRI >90  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5150400.27.20  
1A5150400.30.20






**BUIO TRIM - 13°**  
Transparent filter  
6W  
24V DC  
2700K - 247lm / 3000K - 247lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5160400.27.20  
1A5160400.30.20



**BUIO TRIM - 25°**  
Transparent filter  
6W  
24V DC  
2700K - 257lm / 3000K - 257lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5180400.27.20  
1A5180400.30.20



**BUIO TRIM - 32°**  
Transparent filter  
6W  
24V DC  
2700K - 297lm / 3000K - 297lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5170400.27.20  
1A5170400.30.20




**BUIO TRIM ELLIPTICAL**  
Transparent filter  
6W  
24V DC  
2700K - 233lm / 3000K - 233lm  
CRI >90  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5190400.27.20  
1A5190400.30.20








**BUIO TRIMLESS - 13°**  
Black filter  
6W  
24V DC  
2700K - 93lm / 3000K - 93lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5200400.27.20  
1A5200400.30.20



**BUIO TRIMLESS - 25°**  
Black filter  
6W  
24V DC  
2700K - 158lm / 3000K - 158lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5220400.27.20  
1A5220400.30.20



**BUIO TRIMLESS - 32°**  
Black filter  
6W  
24V DC  
2700K - 144lm / 3000K - 144lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5210400.27.20  
1A5210400.30.20



**BUIO TRIMLESS ELLIPTICAL**  
Black filter  
6W  
24V DC  
2700K - 91lm / 3000K - 91lm  
CRI >90  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5230400.27.20  
1A5230400.30.20



**BUIO TRIMLESS - 13°**  
Transparent filter  
6W  
24V DC  
2700K - 247lm / 3000K - 247lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5240400.27.20  
1A5240400.30.20



**BUIO TRIMLESS - 25°**  
Transparent filter  
6W  
24V DC  
2700K - 257lm / 3000K - 257lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K


1A5260400.27.20  
1A5260400.30.20



**BUIO TRIMLESS - 32°**  
Transparent filter  
6W  
24V DC  
2700K - 297lm / 3000K - 297lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5250400.27.20  
1A5250400.30.20




**BUIO TRIMLESS ELLIPTICAL**  
Transparent filter  
6W  
24V DC  
2700K - 233lm / 3000K - 233lm  
CRI >90  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5270400.27.20  
1A5270400.30.20


Compulsory accessories

Installation kits



Installation box		Not included
Standard	1A5280000.00.00	

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories

Installation kits



Driver connector IP68		Included
	1 Piece	1A1660000.00.00












## BUIO - SPOT

Maurici Ginés / 2023

A small black dot reveals its function only when necessary.  
For us the secret of light lies not in its shape, or in some technical virtuosity,  
but in the choice and assumption of a method,  
the method of amazement and memory.

BUIO - SPOT			BUIO - SPOT		
Floor-Wall-Ceiling / Direct / Outdoor					
Material	Metal				
Finish	.04 Matt Black				
Note	Outdoor luminaire. Adjustable spike and wall versions. Available with transparent or black glass. AISI 316L stainless steel accessories for the spike and wall versions. Black cable (1 m).				
	<b>BUIO - 13°</b> Black filter 6W 24V DC 2700K - 93lm / 3000K - 93lm CRI >90 Beam 13° UGR <19 Driver not included CE IP67				
	Matt Black - 2700K Matt Black - 3000K		1A5040400.27.20 1A5040400.30.20		
	<b>BUIO - 25°</b> Black filter 6W 24V DC 2700K - 158lm / 3000K - 158lm CRI >90 Beam 25° UGR <19 Driver not included CE IP67				
	Matt Black - 2700K Matt Black - 3000K		1A5060400.27.20 1A5060400.30.20		
	<b>BUIO - 32°</b> Black filter 6W 24V DC 2700K - 144lm / 3000K - 144lm CRI >90 Beam 32° UGR <19 Driver not included CE IP67				
	Matt Black - 2700K Matt Black - 3000K		1A5050400.27.20 1A5050400.30.20		
	<b>BUIO ELLIPTICAL</b> Black filter 6W 24V DC 2700K - 91lm / 3000K - 91lm CRI >90 UGR <19 Driver not included CE IP67				
	Matt Black - 2700K Matt Black - 3000K		1A5070400.27.20 1A5070400.30.20		






**BUIO - 13°**

Transparent filter  
6W  
24V DC  
2700K - 247lm / 3000K - 247lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5080400.27.20  
1A5080400.30.20




**BUIO - 25°**

Transparent filter  
6W  
24V DC  
2700K - 257lm / 3000K - 257lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5100400.27.20  
1A5100400.30.20




**BUIO - 32°**

Transparent filter  
6W  
24V DC  
2700K - 297lm / 3000K - 297lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K

1A5090400.27.20  
1A5090400.30.20



**BUIO ELLIPTICAL**

Transparent filter  
6W  
24V DC  
2700K - 233lm / 3000K - 233lm  
CRI >90  
UGR <19  
Driver not included




Matt Black - 2700K  
Matt Black - 3000K

1A5110400.27.20  
1A5110400.30.20




Compulsory accessories


Installation kits



Wall bracket		Not included
Stainless Steel	Brushed INOX	1A4431000.00.00



Ceiling rose		Not included
Matt Black	Brushed INOX	1A4441000.00.00




Earth spike		Not included
Stainless Steel	Brushed INOX	1A4451000.00.00



Tree strap		Not included
Standard	Length 1 m	1A4590000.00.00

Drivers




Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories

Installation kits



Driver connector IP68		Included
	1 Piece	1A1660000.00.00

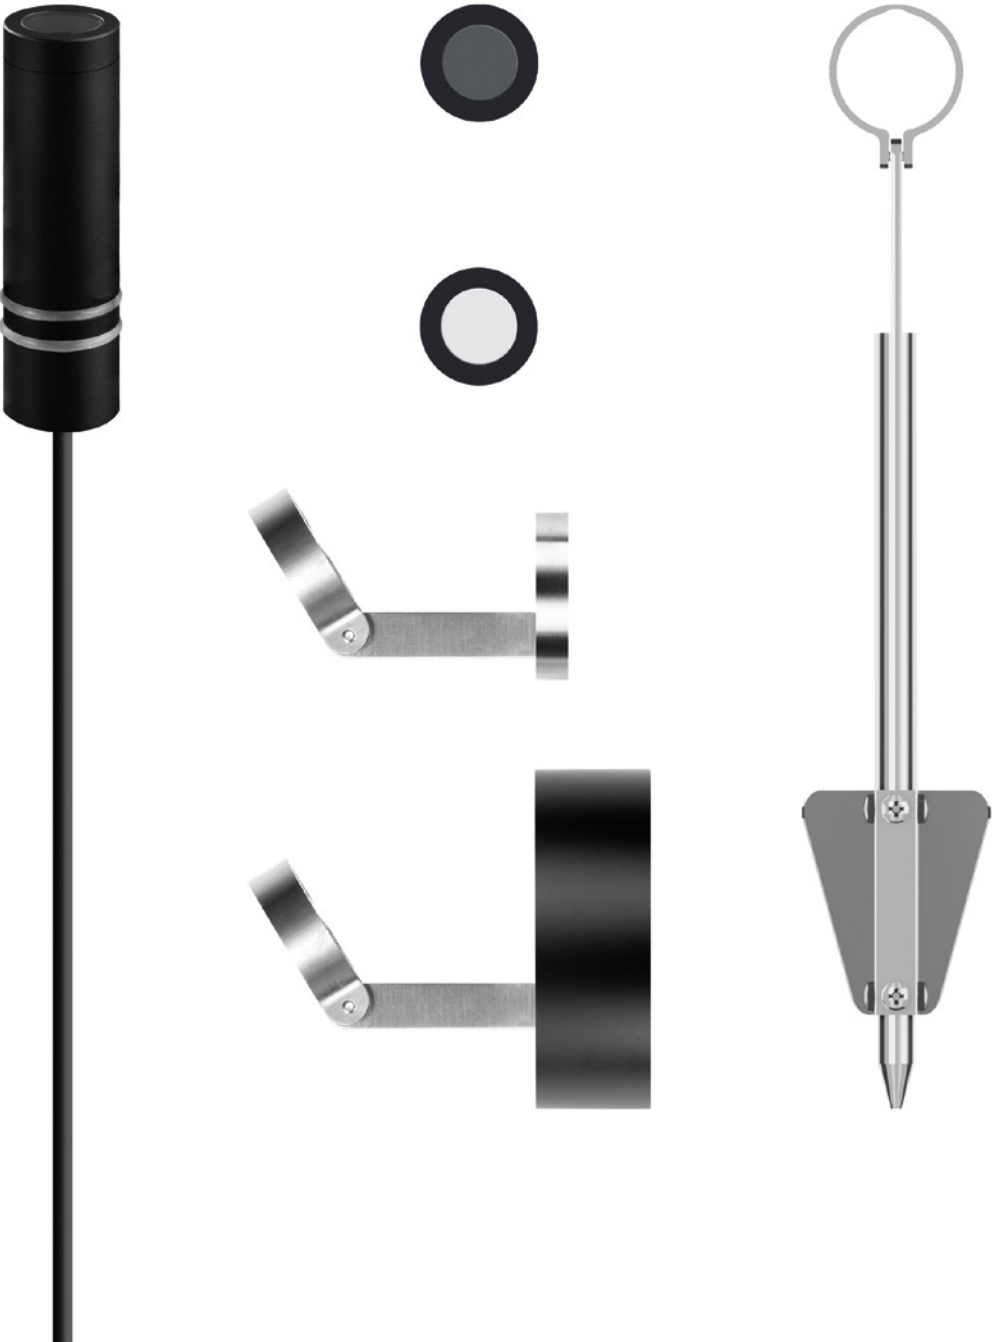




A tool to light.



The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.



-Wall / Direct / Outdoor	
Material	Glass - Metal
Finish	.03 Matt White
Note	Outdoor wall luminaire. Adjustable along the vertical axis.

	<b>CHILLOUT</b> Max 12W - E27 100-240V - 50/60Hz ON/OFF Bulb not included C E IP65	Matt White - ON/OFF	1A3660300.00.00
---	---	---------------------	-----------------

Optional accessories

Installation kits		Driver connector IP68	Included
		1 Piece	1A1660000.00.00
Bulbs		LED - E27 - PAR30s	Not included
		220-240V - 9,5W - 25° 3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	1Y0330730





## GRILLO

Daniele Sprega / 2012



A small luminous elf that you can install in your garden or inside a vase.


A thin stem stuck into the ground and a little adjustable LED projector.  
For illuminating a flower, a plant or simply to accompany us along a path.

Lamp with spike.

GRILLO

Daniele Sprega / 2012

Floor / Direct / Outdoor	
Material	AISI 316L Stainless Steel - Metal
Finish	.04 Matt Black
Note	Outdoor lamp with spike. Adjustable in all directions. AISI 316L stainless steel stem. Black cable (5 m).

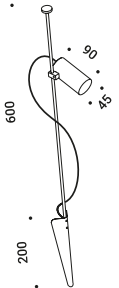

**GRILLO**  
4,2W  
24V DC  
2700K - 262lm / 3000K - 282lm  
CRI >90  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A3570400.27.20  
1A3570400.30.20

Daniele Sprega / 2012

GRILLO

Compulsory accessories		
Drivers		
	Driver	Not included
	110-240V 24V/25W/IP67/ON/OFF 1Z1120620	
Optional accessories		
Installation kits		
	Driver connector IP68	Included
	1 Piece 1A1660000.00.00	
	Additional stem 1 m	Not included
	Standard AISI 316L stainless steel 1A3590000.00.00	
	Additional LED head	Not included
	Matt Black 24V DC - 4,2W 2700K - 262lm - CRI >90 1A3580400.27.20 24V DC - 4,2W 3000K - 282lm - CRI >90 1A3580400.30.20	





## HAZARD

Davide Groppi / 2023



We have always been thrilled by bare, abandoned lamps.  
On the walls of mountain huts, in the countryside of our plain.  
Unfinished works, lamps still to be decided, ephemeral thoughts that become poetry.  
Wall lamp with direct light for outdoor environments  
with steel nail subject to natural oxidation over time.




HAZARD

Davide Groppi / 2023

Wall / Direct / Outdoor	
Material	Metal - Thermoplastic resin
Finish	.00 Standard
Note	Outdoor wall luminaire. One red and one black cable (1,5 m).

	<b>HAZARD</b> 0,6W - E27 36V DC 2200K - 50lm CRI 80 Driver not included Bulb included CE  IP65	Standard - 2200K	1A4210000.22.20
---	--	------------------	-----------------

Compulsory accessories

Drivers		Not included	
	Driver		
110-240V	36V/36W/IP67/ON/OFF	1Z1120590	









Light has found a home.  
A lamp designed to welcome, illuminating the entrance.



Wall / Direct / Outdoor	
Material	Metal
Finish	.00 Standard
Note	Outdoor wall luminaire. Matt black body and matt red top cover. Red hole light.

	<b>IMU</b> 5,5W Max 350mA DC 3000K - 306lm CRI >80 Driver not included CE IP65	Standard - 3000K	1A3550000.30.20
---	--	------------------	-----------------

Compulsory accessories

Drivers				Not included
	<b>Driver</b>			
	220-240V(100-127V)	350mA/17W(15W)/IP68/ON/OFF	1Z0240880	

Optional accessories

Installation kits				Included
	<b>Driver connector IP68</b>			
	1 Piece	1A1660000.00.00		









Light, waiting for Romeo.

An outdoor light, for walls or to illuminate the entrance.



Wall / Diffuse / Outdoor	
Material	Glass - Metal
Finish	.03 Matt White
Note	Outdoor wall luminaire.

	<b>JULIET</b>	
	18W 220-240V - 50/60Hz 2700K - 827lm / 3000K - 865lm CRI >80 TRIAC/IGBT CE IP65	
Optional accessories		
Installation kits		
	Driver connector IP68	Included
	1 Piece	1A1660000.00.00







## LENTA

Bestetti Associati - Davide Groppi / 2011


A lantern. Soft and diffuse light.  
A Slow-Light project for outdoors.



Floor / Diffuse / Outdoor

Material Metal - Methacrylate - Polycarbonate  
Finish .03 Matt White

Note Outdoor floor luminaire. Matt white diffuser. Black cable (5 m).

	<b>LENTA</b> Max 18W - E27 100-240V - 50/60Hz ON/OFF Bulb not included C E IP65	Matt White - ON/OFF	1A3630300.00.00
---	--	---------------------	-----------------

Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00

Bulbs



LED - E27 - A60	Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790







## NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022


The idea is to bring light wherever you like.  
A simple project: a cable and a LED.  
Indoor version also available.



NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

Suspension / Direct / Outdoor		
Material	AISI 316L Stainless Steel - Metal	
Finish	.04 Matt Black	.32 Copper Oxide
Note	Outdoor suspension luminaire. Black cable (10 m).	



NEURO OUTDOOR

4,2W  
24V DC  
2700K - 262lm / 3000K - 282lm  
CRI >90  
Driver not included



Matt Black - 2700K  
Matt Black - 3000K  
Copper Oxide - 2700K  
Copper Oxide - 3000K

1A4030400.27.20  
1A4030400.30.20  
1A4033200.27.20  
1A4033200.30.20

Compulsory accessories

Drivers		
Driver	Not included	
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories

Installation kits		
Driver connector IP68	Included	
	1 Piece	1A1660000.00.00



Matt Black



Copper Oxide






## NUIT

Maurici Ginés / 2023

Night has always been a source of inspiration.  
We walk, and we are not alone.  
Nuit is a small travel companion that draws our night-time journeys.  
**Bronze Delta ADI-FAD Award 2024**

-Recessed / Diffuse / Indoor-Outdoor			
Material	Metal		
Finish	.03 Matt White	.27 Gravity Black	.38 Blasted Inox
Note	Outdoor recessed luminaire.		



NUIT

1W  
24V DC  
2700K - 33lm / 3000K - 34lm  
CRI >90  
Driver not included




Matt White - 2700K  
Matt White - 3000K  
Gravity Black - 2700K  
Gravity Black - 3000K  
Blasted Inox - 2700K  
Blasted Inox - 3000K

1A1320300.27.20  
1A1320300.30.20  
1A1322700.27.20  
1A1322700.30.20  
1A1323800.27.20  
1A1323800.30.20

Compulsory accessories

Installation kits




Concrete box		Not included
Standard	1A4460000.00.00	



Plasterboard frame 12,5 mm		Not included
Matt White	Cut-out 100x100 mm Minimum space for mounting 110 mm	1A4470300.00.00


Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories

Installation kits



Adapter plasterboard 25 mm		Not included
Standard	1A5030000.00.00	




Driver connector IP68		Included
	1 Piece	1A1660000.00.00





Matt White



Gravity Black



Blasted Inox







## ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

From the Latin“origo”, start, birth, source.  
It appears like a bud emerging from the ground and soaring upwards towards the sky, a  
stem that becomes increasingly thinner. Mysterious, enigmatic but comfortable,  
it combines the fascination of the unknown  
with the pleasure of a sophisticated and elegant ambient light.  
Origine sculpts and enhances every environment with its indirect light,  
which is intentionally non-invasive, graphic and fascinating.

Indoor version also available.  
**AZ Award 2021 and People's Choice**  
**Archiproducts Design Award 2020**




ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

-Floor / Indirect / Outdoor

Material      Glass fiber - Metal  
Finish         .04   Matt Black

Note            Outdoor floor luminaire. Black cable (5 m).

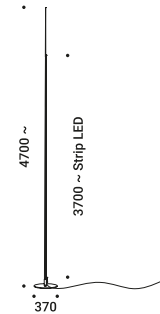

ORIGINE OUTDOOR


35W  
24V DC  
2700K - 2872lm / 3000K - 2930lm  
CRI >80  
Driver not included

CE IP65

Matt Black - 2700K  
Matt Black - 3000K

1A2480400.27.20  
1A2480400.30.20

Compulsory accessories

Drivers			
			
Driver			Not included
100-240V	24V/60W/IP67/1-10V	1Z1120260	

Optional accessories

Installation kits			
			
Driver connector IP68			Included
	1 Piece	1A1660000.00.00	











**Q²**

Alberto Zattin / 2006



A piece of architecture to be used in space.  
A concrete cube that allows you to understand volumes and architecture  
in an unusual and sometimes unprecedented way.  
Indoor version also available.




Q²

Alberto Zattin / 2006

Floor / Direct / Outdoor		
Material	Cement - Metal	
Finish	.00 Standard	
Note	Outdoor floor luminaire. Concrete body. Black cable (2,5 m).	

	<div><div>Q²</div><div>20W</div><div>Max 500mA DC</div><div>3000K - 2058lm</div><div>CRI &gt;90</div><div>Driver not included</div><div>CE  IP67</div></div>	Standard - 3000K	1A1150000.30.20
---	---	------------------	-----------------

Compulsory accessories

Drivers		
		
Driver		Not included
220-240V(110-127V)	500mA/24W(15W)/IP68/ON/OFF	1Z0241170

Optional accessories

Installation kits		
		
Driver connector IP68		Included
	1 Piece	1A1660000.00.00





## SAMPEI OUTDOOR

Enzo Calabrese - Davide Groppi / 2011

A star that shines in the sky.  
We wanted to go further, beyond the usual meaning of a floor lamp.  
It is like watching a tiny miracle, an unexpected magic.  
A soft glow comes from far away,  
suggesting unforeseen solutions and indicating lost details.



Compasso d'Oro ADI  
Award 2014





Floor / Direct / Outdoor				
Material	Glass fiber - Metal			
Finish	.03 Matt White	.04 Matt Black	.20 Magic Blue	.35 Grey Green
	.40 Grey Beige			
Note	Outdoor floor luminaire. Adjustable in all directions. Black cable.			

	<b>SAMPEI 440 OUTDOOR</b> 8,4W Max 700mA DC 2700K - 639lm / 3000K - 639lm CRI >90 Driver not included CE  IP65	Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K Magic Blue - 2700K Magic Blue - 3000K Grey Green - 2700K Grey Green - 3000K Grey Beige - 2700K Grey Beige - 3000K	1A3770300.27.20 1A3770300.30.20 1A3770400.27.20 1A3770400.30.20 1A3772000.27.20 1A3772000.30.20 1A3773500.27.20 1A3773500.30.20 1A3774000.27.20 1A3774000.30.20
	<b>SAMPEI XXL OUTDOOR</b> 12,8W Max 700mA DC 2700K - 1256lm / 3000K - 1313lm CRI >90 Driver not included CE  IP65	Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K Magic Blue - 2700K Magic Blue - 3000K Grey Green - 2700K Grey Green - 3000K Grey Beige - 2700K Grey Beige - 3000K	1A5330300.27.20 1A5330300.30.20 1A5330400.27.20 1A5330400.30.20 1A5332000.27.20 1A5332000.30.20 1A5333500.27.20 1A5333500.30.20 1A5334000.27.20 1A5334000.30.20

<b>Compulsory accessories</b>		
Drivers		
	Driver	Not included
	220-240V(100-127V) 700mA/30W(15W)/IP68/ON/OFF	1Z0241110
<b>Optional accessories</b>		
Installation kits		
	Driver connector IP68	Included
	1 Piece	1A1660000.00.00






**Palazzo Venier dei Leoni**  
Peggy Guggenheim Collection  
Venezia

SAMPEI OUTDOOR



## SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013

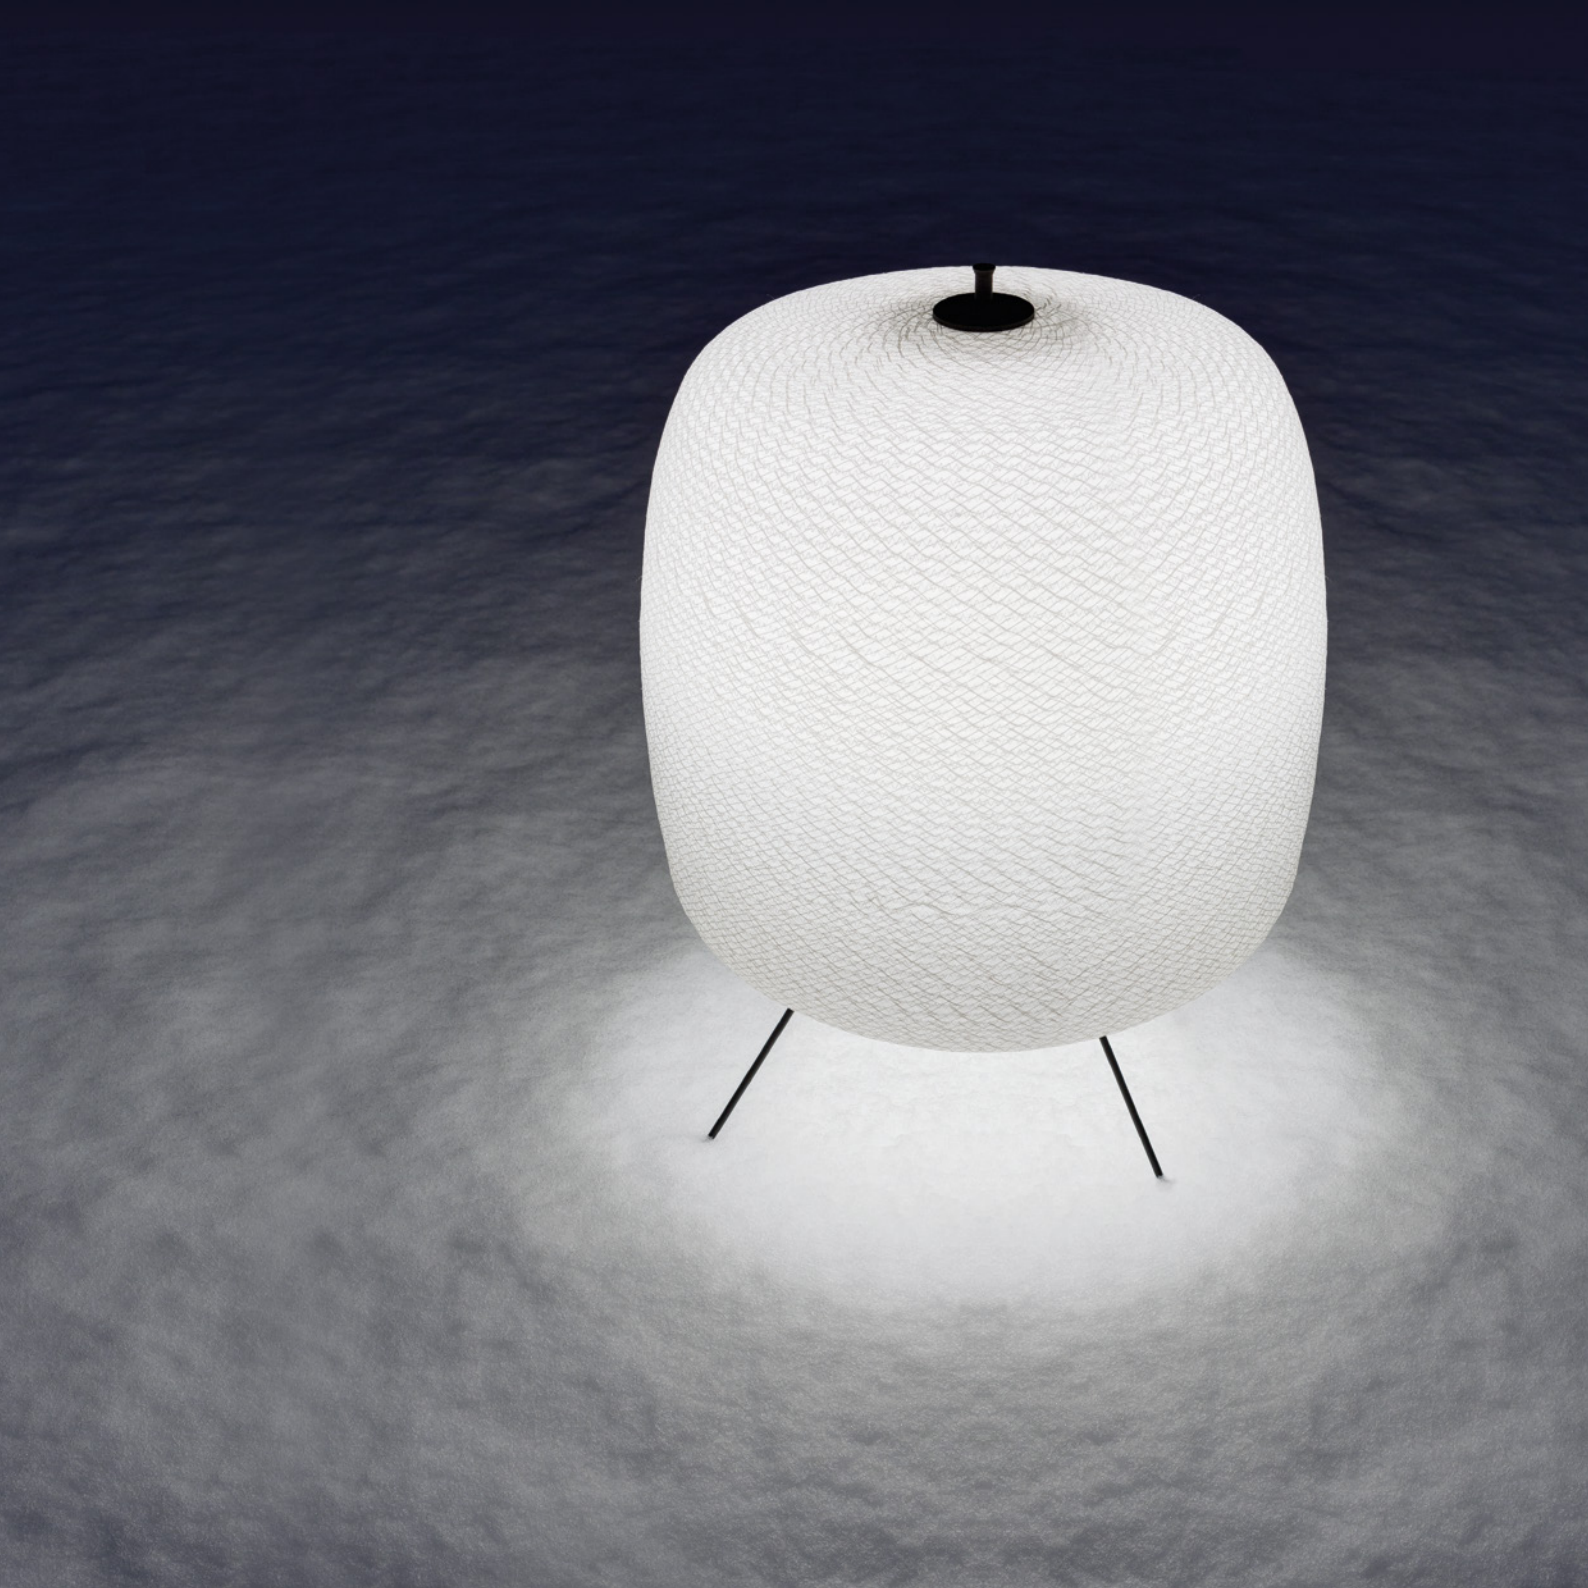


A nylon lampshade, strictly hand-stitched and hand-made.  
Indoor version also available.

SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013

Floor / Diffuse / Outdoor

Material	Metal - PBT - Polycarbonate
Finish	.00 Standard
Note	Outdoor floor luminaire. Hand-stitched shade. Matt black stems. Black cable (5 m).



**SHOJI OUTDOOR**  
Max 18W - E27  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
C E IP65

Standard - ON/OFF

| 1A3640000.00.00 |

Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00

Bulbs



LED - E27 - A60	Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790



A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.




## SPOT OUTDOOR

/ 2018

Wall / Direct / Outdoor

Material	Metal	
Finish	.03 Matt White	.04 Matt Black

**Note** Outdoor wall and ceiling luminaire. Adjustable in all directions.



**SPOT OUTDOOR**

8,4W  
Max 700mA DC  
2700K - 639lm / 3000K - 639lm  
CRI >90  
Driver not included




Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A3650300.27.20
1A3650300.30.20
1A3650400.27.20
1A3650400.30.20

### Compulsory accessories

## Drivers



## Driver

220-240V(100-127V) 700mA/30W(15W)/IP68/ON/OFF

Not included

1Z0241110

## Optional accessories

## Installation kits













Driver connector IP68



1 Piece

Included

1A1660000.00.00

	Socket	Voltage	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	E27	220-240V	7W	360°	2700K	806lm	>80	E	X	1Y2080010
	E27	220-240V	11,2W	360°	2700K	1521lm	>90	D	X	1Y0330790
	E27	220-240V	13W	200°	2700K	1521lm	>80	E	-	1Y0330650
	E27	220-240V	20W	200°	2700K	2452lm	>80	E	X	1Y2160020
	E27	220-240V	9,5W	25°	3000K	760lm	>80	F	X	1Y0330730
	GU10	230V	7,5W	10°	2700K	390lm	>95	G	X	1Y1580210
	GU10	230V	7,5W	10°	3000K	410lm	>95	G	X	1Y1580010
	GU10	220-240V	5,5W	25°	2700K	355lm	>97	G	X	1Y0330770
	GU10	220-240V	5,5W	25°	3000K	375lm	>97	G	X	1Y0330500
	GU10	220-240V	4,9W	120°	3000K	550lm	>80	E	-	1Y0330740
	GU4	12V	4W	24°	2700K	200lm	>80	G	-	1Y0330450
	G4	12V	10W	360°	2800K	145lm	>100	G	X	1Y0041490
	R7s	220-240V	4W	330°	3000K	450lm	>80	E	-	1Y0000138












DG111 LED MODULES

	Current	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	350mA DC	11,7W	15°	2700K	1336lm	>90	F	X	1A4700000.27.20
	350mA DC	11,7W	15°	3000K	1364lm	>90	F	X	1A4700000.30.20
	350mA DC	11,7W	22°	2700K	1322lm	>90	F	X	1A3890000.27.20
	350mA DC	11,7W	22°	3000K	1382lm	>90	F	X	1A3890000.30.20
	350mA DC	11,7W	36°	2700K	1276lm	>90	F	X	1A3900000.27.20
	350mA DC	11,7W	36°	3000K	1343lm	>90	F	X	1A3900000.30.20
	500mA DC	16,7W	15°	2700K	1648lm	>90	F	X	1A4700000.27.20
	500mA DC	16,7W	15°	3000K	1682lm	>90	F	X	1A4700000.30.20
	500mA DC	16,7W	22°	2700K	1859lm	>90	F	X	1A3890000.27.20
	500mA DC	16,7W	22°	3000K	1943lm	>90	F	X	1A3890000.30.20
	500mA DC	16,7W	36°	2700K	1795lm	>90	F	X	1A3900000.27.20
	500mA DC	16,7W	36°	3000K	1890lm	>90	F	X	1A3900000.30.20











	Power	Input	Output	Dimming	Protection	Code
	50W	220-240V	1400mA	TRIAC - PUSH	IP20	1Z0241370.1400
	55W(40W)	220-240V(110-120V)	1400mA	DALI - PUSH - 1-10V	IP20	1Z0240830.1400
	50W	100-240V	24V	ON/OFF	IP20	1Z1120490
	80W	100-240V	24V	ON/OFF	IP20	1Z1120440
	20W	220-240V	24V	TRIAC/IGBT	IP20	1Z0240850.24
	16W(15W)	220-240V(100-127V)	24V	DALI	IP20	1Z0241180.24
	20W(15W)	220-240V(100-127V)	24V	PUSH - 1-10V	IP20	1Z0240870.24
	13,5W(13,5W)	220-240V(110-127V)	250mA	DALI - PUSH - 1-10V	IP20	1Z0241270.250
	17W	220-240V	350mA	TRIAC/IGBT	IP20	1Z0240850.350
	17W(15W)	220-240V(100-127V)	350mA	DALI	IP20	1Z0241180.350
	18W(15W)	220-240V(100-127V)	350mA	PUSH - 1-10V	IP20	1Z0240870.350




DRIVERS

	Power	Input	Output	Dimming	Protection	Code
	18W(18W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0240530.350
	60W	220-240V	48V	DALI	IP20	1Z0830820
	20W	220-240V	500mA	TRIAC/IGBT	IP20	1Z0240850.500
	20W(15W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0241180.500
	20W(15W)	220-240V(100-127V)	500mA	PUSH	IP20	1Z0240840.500
	20W(15W)	220-240V(100-127V)	500mA	PUSH - 1-10V	IP20	1Z0240870.500
	25W(13,5W)	220-240V(110-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0241270.500
	17,5W	100-240V	5V	ON/OFF	IP20	1Z1120180
	120W	100-240V	24V	1-10V	IP67	1Z1120240
	150W	100-240V	24V	1-10V	IP67	1Z1120500
	60W	100-240V	24V	1-10V	IP67	1Z1120260







DRIVERS

	Power	Input	Output	Dimming	Protection	Code
	96W	100-240V	24V	1-10V	IP67	1Z1120540
	25W	110-240V	24V	ON/OFF	IP67	1Z1120620
	36W	110-240V	36V	ON/OFF	IP67	1Z1120590
	150W	100-240V	48V	1-10V	IP67	1Z1120250
	240W	100-240V	48V	1-10V	IP67	1Z1120390
	60W	100-240V	48V	ON/OFF	IP67	1Z1120640
	80W	100-240V	48V	1-10V	IP67	1Z1120400
	17W(15W)	220-240V(100-127V)	350mA	ON/OFF	IP68	1Z0240880
	24W(15W)	220-240V(110-127V)	500mA	ON/OFF	IP68	1Z0241170
	30W(15W)	220-240V(100-127V)	700mA	ON/OFF	IP68	1Z0241110

COMMON ACCESSORIES

	Power	Input	Output	Dimming	Protection	Code
Controller Casambi - Radio signal 2.4 - 2.486 GHz						
		220-240V - 50Hz		DALI	IP20	1Z0400740
		220-240V - 50Hz		1-10 V	IP20	1Z0400660
	(75W) 150W	(110V) 240V - 50/60Hz		TRIAC	IP20	1Z0400670


COMMON ACCESSORIES

	Size	Cut-out	Finish	Code
Plasterboard trapdoors				
	200x200 mm	205x205 mm	Standard	1A3780000.00.00
	400x400 mm	415x415 mm	Standard	1A3790000.00.00
Clamp				
	Ø 50x20 mm		Matt White	1X0110300.02.00
			Matt Black	1X0110400.02.00
Remote clamp for elettrical cable				
	50x50x30 mm		Standard	1X0110000.01.00
Wall and ceiling rose				
	Ø 80x28 mm		Matt White	1X0030300.01.00
			Matt Black	1X0030400.01.00
Driver connector IP68				
			Standard	1A1660000.00.00

\* For Class III suspension luminaire only

SUSPENSION KITS

Recessed suspension kit

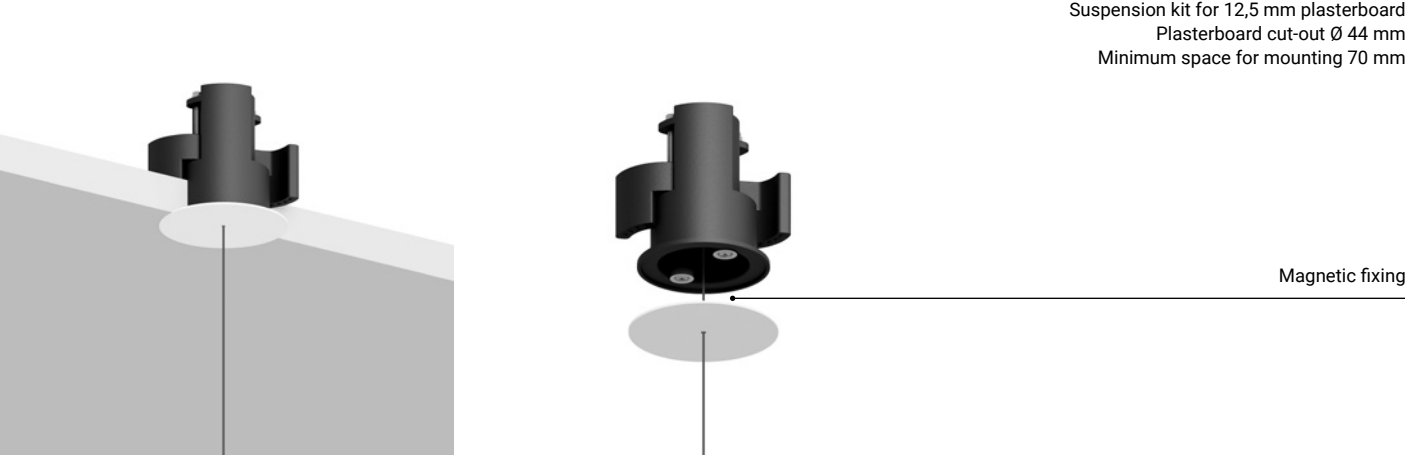


Version	Use	Product reference	Finish	Code
Recessed suspension kit 01	For suspension cables	SHANGHAI 1	Matt White	1X0000300.01.00
		SHANGHAI 2		
		SOTTILE 1		
		SOTTILE 1 DE		
		SOTTILE 2	Matt Black	1X0000400.01.00
		SOTTILE 2 DE		
Recessed suspension kit 02	For electrical cables	MAGIA	Matt White	1X0000300.02.00
			Matt Black	1X0000400.02.00
Recessed suspension kit 03	For suspension cables	MASAI 1	Matt White	1X0000300.03.00
		MASAI 2		
		REFLEX S 1		
		REFLEX S 2	Matt Black	1X0000400.03.00
		SPY		
Recessed suspension kit 04	For electrical cables	ASINTOTO	Matt White	1X0000300.04.00
		REFLEX S 2		
		SHANGHAI 2	Matt Black	1X0000400.04.00
		SOTTILE 2		
		SOTTILE 2 DE		
Recessed suspension kit 05	For electrical cables	LOUIS XIV 2	Matt White	1X0000300.05.00
		SOTTOSOPRA 2	Matt Black	1X0000400.05.00
Recessed suspension kit 06	For electrical cables	CATHODE 2	Matt White	1X0000300.06.00
		LED IS MORE 2	Matt Black	1X0000400.06.00
		MISS 2		




SUSPENSION KITS

Ceiling suspension kit

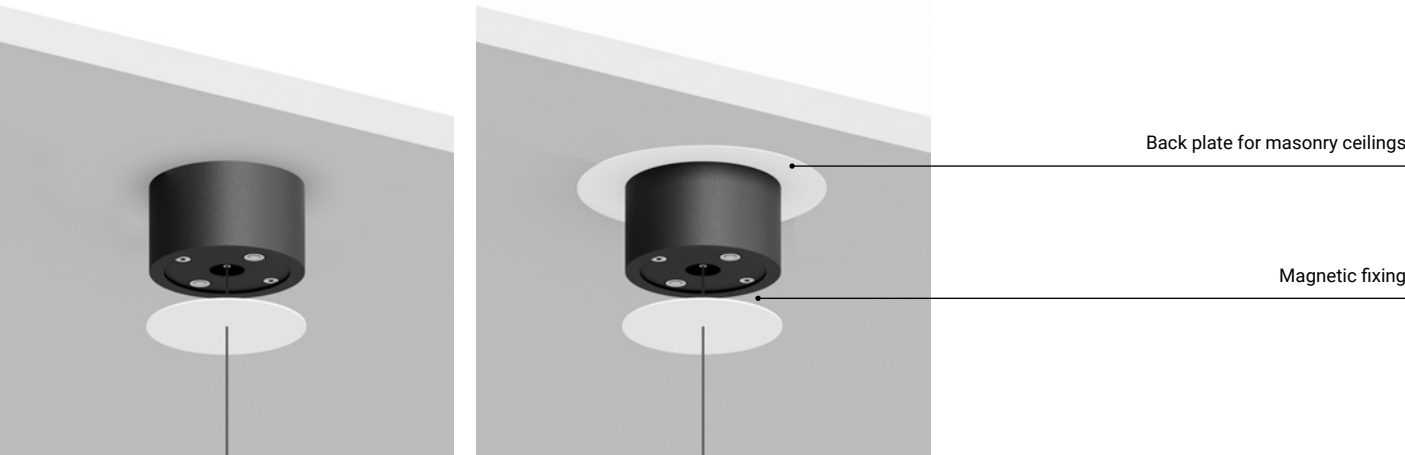

Version	Use	Product reference	Finish	Code
Ceiling suspension kit 01	For suspension cables	SHANGHAI 1	Matt White	1X0010300.01.00
		SHANGHAI 2		
		SOTTILE 1		
		SOTTILE 1 DE	Matt Black	1X0010400.01.00
		SOTTILE 2		
		SOTTILE 2 DE		
Ceiling suspension kit 02	For electrical cables	MAGIA	Matt White	1X0010300.02.00
			Matt Black	1X0010400.02.00
Ceiling suspension kit 03	For suspension cables	MASAI 1	Matt White	1X0010300.03.00
		MASAI 2		
		REFLEX S 1		
		REFLEX S 2	Matt Black	1X0010400.03.00
		SPY		
Ceiling suspension kit 04	For electrical cables	ASINTOTO	Matt White	1X0010300.04.00
		REFLEX S 2		
		SHANGHAI 2	Matt Black	1X0010400.04.00
		SOTTILE 2		
		SOTTILE 2 DE		
Ceiling suspension kit 06	For electrical cables	CATHODE 2	Matt White	1X0010300.06.00
		LED IS MORE 2	Matt Black	1X0010400.06.00
		MISS 2		
Back plate	For masonry ceilings		Matt White	1X0050300.01.00



**General terms.**

This document replaces any other previous one.  
Davide Groppi s.r.l. reserves the right to change its products without notice. In this case, the descriptions printed here are not binding.  
The sizes are expressed in millimeters.

**Shipment.**

Returned merchandise must be authorized in writing by Davide Groppi s.r.l.  
Any claim must be made in writing to Davide Groppi s.r.l. within 7 days of the delivery date. If not, will not be accepted.

**Warranty.**

All products are guaranteed for 24 months from the date of delivery.  
The warranty is not valid for damage caused by third parties.  
Any damage resulting from improper installation or changes to products cannot be considered the responsibility of Davide Groppi s.r.l.

**Rights.**

No part of this document may be reproduced or transmitted in any form or by any means: electronic, mechanical or otherwise,  
without the written permission of Davide Groppi s.r.l.

**Jurisdiction.**

For any dispute, Piacenza, Italy, will be the court of jurisdiction.

**Privacy.**

Davide Groppi s.r.l. protects the confidentiality of personal data as provided to articles 12, 13 and 14 of the European Regulation n. 679/2016 (GDPR).



People who work with me:

Nicoletta Adorni  
Roberto Aroldi  
Luca Arzani  
Gabriele Baggi  
Diego Balconi  
Laura Bani  
Rosa Bardella  
Marco Benedetti  
Elena Bernazzani  
Nella Bisotti  
Eleonora Bolzoni  
Lorenzo Borsani  
Enrica Brunetti  
Cristina Bruzzi  
Silvia Caborni  
Riccardo Carini  
Omar Carraglia  
Moreno Casella  
Alberto Cavazzi  
Xhoana Cela  
Beatrice Cerrelli  
Sofia Cesarini  
David Chicheportiche  
Laura Claves  
Claudia Clienti  
Michael Cogni  
Andrea Costa  
Giacomo Costellini  
Alessandro Cremaschi  
Alessandra Dallagiovanna  
Monica Dallavalle  
Lara De Pietri  
Stefano De Santis  
Sabrina Delfini  
Alberto Di Felice  
Myzeien Elezi  
Monica Fornasari  
Lorenzo Fugazza  
Daniela Galesi  
Laura Garetti  
Gabriele Gelmetti

Alessandro Ghisoni  
Giovanni Giordano  
Marina Girometta  
Martin Grambozov  
Danilo Groppi  
Michele Groppi  
Silvia Guardiani  
Heather Huber  
Eriola Kacbufi  
Marialuisa Maffi  
Giorgia Marzani  
Katuscia Marzeddu  
Simone Maserati  
Giulia Mazzoni  
Mirko Mocenighi  
Marilena Molinari  
Lorenzo Nicoli  
Martina Orlandi  
Chiara Orsi  
Filippo Palumbo  
Franca Peveri  
Michelina Pinna  
Luca Pompili  
Vitalii Prosianiuk  
Laura Ronchini  
Marco Scaramuzza  
Giacomo Sesenna  
Nicolò Siligardi  
Luca Silvestri  
Enza Sorbo  
Michela Tiberto  
Bryan Emerson Velasquez  
Elena Vescovo  
Chiarina Gabriela Viceconte  
Luisa Vignati  
Jaime Alberto Villada Pastor  
Alessandro Villaggi  
Ivan Vitali  
Björn Wienand  
Alberto Zanardi  
Davide Zanoni

Thanks to:

Luigi Coppola  
Danord  
Donatella Nalio  
Daniele Sprega  
Franco Tagliaferri  
Alberto Zattin

Photos:

Fausto Mazza  
  
Niccolò Biddau  
Alessandro Carra  
Fabrizio Cicconi  
Diego Cuoghi  
Nelson Garrido  
LineArchitects  
Nacása & Partners Inc.  
Thomas Pagani  
Iacopo Pasqui

**davidegroppi.com**

**Davide Groppi s.r.l.**  
Via Belizzi 20 / 22  
29122 Piacenza - Italia  
+39.0523.571590  
info@davidegroppi.com

Davide Groppi s.r.l. © 2025  
Company with sole shareholder under the direction and coordination of Dexelance s.p.a.