


080096 - MOLLA CONTRASTO VARIATORE RACING DURA Kg. 32 ROSSA RACING HARD RED SPRING – Kg. 32

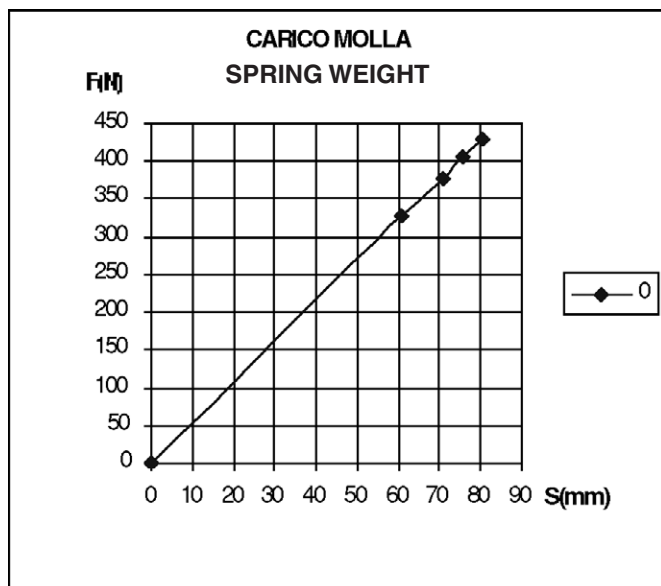

De= 53.4 ± 0.800	LO= 110±3.568 mm
Sh= 15 mm	L1= 49 mm
Sk= 91.37 mm	L2= 34 mm
V= 1	Ln= 39.35 mm
Nt= 7 Wdg	Lc= 29.72 mm
Fe= 126.3 Hz	S1= 61 mm
K= 1.114	S2= 76 mm
L= 1082 mm	Sn= 70.65 mm
Tan al= 0.131	Sc= 80.29 mm
M= 117.7 g	F1= 326.7±24.010 N
G= 82000 N/mm²	F2= 407±25.215 N
Rm= 1770 N/mm²	Fn= 378.4 N
Tauz= 991.3 N/mm²	Fc= 430 N
T= 20°C	Tauk1= 615.3 N/mm²
G20= 82000 N/mm²	Tauk2= 766.7 N/mm²
R= 5.356 N/mm	Taukh= 151.3 N/mm²
D= 4.2 ± 0.045 mm	Taun= 639.9 N/mm²
Dm= 49.2 mm	Tauc= 727.2 N/mm²
N= 5 Wdg.	Tauz= 991.3 N/mm²
D/d= 11.71	
Di= 45	

MATERIALE / MATERIAL:

PRODUZIONE / PRODUCTION:

SPIRE TERMINALI / FINAL TURN:

DEFORMAZIONE / DEFORMATION:

SUPERFICIE / SURFACE:

SUPERFICIE / SURFACE:

TOLLERANZA / TOLERANCE De, Di, Dm:

TOLLERANZA / TOLERANCE LO:

TOLLERANZA / TOLERANCE F1, F2:

TOLLERANZA / TOLERANCE e1, e2:

TOLLERANZA / TOLERANCE d:

Filo acciaio per molle DIN 17223, tipo D / Steel wire for springs DIN 17223, type D

Avvolto a freddo / Cold rolled up

Accostate e molate / Closed and grinded

Dinamico / Dynamic

Trafilato / Drawn product

Molla pallinata / Working of shot peening

DIN 2095 Classe Qualita' 2 / DIN 2095 Classification Quality 2

DIN 2095 Classe Qualita' 2 / DIN 2095 Classification Quality 2

DIN 2095 Classe Qualita' 2 / DIN 2095 Classification Quality 2

DIN 2095 Classe Qualita' 2 / DIN 2095 Classification Quality 2

Come DIN 2076 B / Like DIN 2076 B

APPLICAZIONI / APPLICATIONS

APRILIA: AMICO / SR / REPLICA

BETA: TEMPO / QUADRA / CRRONO

BSV: AX / GZ / JX

GARELLI: PONY / BIG WHEEL

ITALJET: ASCOT / BAZOOKA / PISTA / REPORTER / SCOOP / FORMULA

LEM: FLASH / GHIBLI / TORNADO

MALAGUTI: F10 / F12 / CENTRO

MBK: EVOLIS / HOT CHAMP / BOOSTER / SORRISO / TARGET / ACTIVE / FIZZ / FORTE

DERBI: VAMOS

P.G.O.: COMET / STAR / STAR II / GALAXI

YAMAHA: AXIS / JOG / ZEST / BWS / ZUMA / CRZ / CT / BELUGA / BREEZE

SUZUKI: ADDRESS / SEPIA / SEPIA ZZ