


Locking nuts (KM) according to SS-ISO 2982

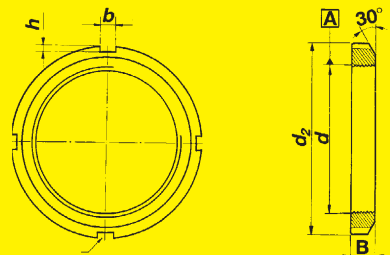

4-slots

d	5H	Threads	d ₂	b ¹⁾	h	Size KM = Ball-bearing nuts
10	M	10×0.75	18	3	2	KM 0
12		12×1	22	3	2	KM 1
15		15×1	25	4	2	KM 2
17	M	17×1	28	4	2	KM 3
20		20×1	32	4	2	KM 4
22		22×1	34	4	2	KM/22
25	M	25×1.5	38	5	2	KM 5
28		28×1.5	42	5	2	KM/28
30		30×1.5	45	5	2	KM 6
32	M	32×1.5	48	5	2	KM/32
35		35×1.5	52	5	2	KM 7
40		40×1.5	58	6	2.5	KM 8
45	M	45×1.5	65	6	2.5	KM 9
50		50×1.5	70	6	2.5	KM 10
55		55×2	75	7	3	KM 11
60	M	60×2	80	7	3	KM 12
65		65×2	85	7	3	KM 13
70		70×2	92	8	3.5	KM 14
75	M	75×2	98	8	3.5	KM 15
80		80×2	105	8	3.5	KM 16
85		85×2	110	8	3.5	KM 17
90	M	90×2	120	10	4	KM 18
95		95×2	125	10	4	KM 19
100		100×2	130	10	4	KM 20
105	M	105×2	140	12	5	KM 21
110		110×2	145	12	5	KM 22
115		115×2	150	12	5	KM 23
120	M	120×2	155	12	5	KM 24
125		125×2	160	12	5	KM 25
130		130×2	165	12	5	KM 26
135	M	135×2	175	14	6	KM 27
140		140×2	180	14	6	KM 28
145		145×2	190	14	6	KM 29
150	M	150×2	195	14	6	KM 30
155		155×3	200	16	7	KM 31
160		160×3	210	16	7	KM 32
165	M	165×3	210	16	7	KM 33
170		170×3	220	16	7	KM 34
180		180×3	230	18	8	KM 36
190	M	190×3	240	18	8	KM 38
200		200×3	250	18	8	KM 40