



## Installation Instructions: 2006-Up Dyna Two-Piece Seats

### A. Baseplate Features

Two-piece baseplates are constructed of marine-grade fiberglass. Front seat engages at nose and with a single screw at the rear. Rear seat is slotted and engages onto the supplied spool washer behind the front seat and a single screw at the rear.



### B. Removal of Stock Seat

1. Remove rear fender screw.
2. Lift seat up and pull back to remove it from the bike.
3. If a passenger hand strap is present, it must be removed before installing the Mustang seat.

### C. Installation of Mustang Seat

#### Front seat

1. Engage nose of front seat into receiver on bike frame.
2. Align rear tab with threaded insert in fender and secure seat with 1/4-20 screw.




## Installation Instructions: 2006-Up Dyna Two-Piece Seats

### Rear Seat

Hardware included: fender nut kit #78084  
spool washer  
1/4-20 x 1" long screw

1. If a Mustang rear seat will be installed, the rear of the Mustang front seat must be secured with the supplied 1/4-20 x 1" long screw and spool washer.
2. Engage slot at front of rear seat onto the spool washer.
3. Align rear tab and secure rear seat with stock screw.

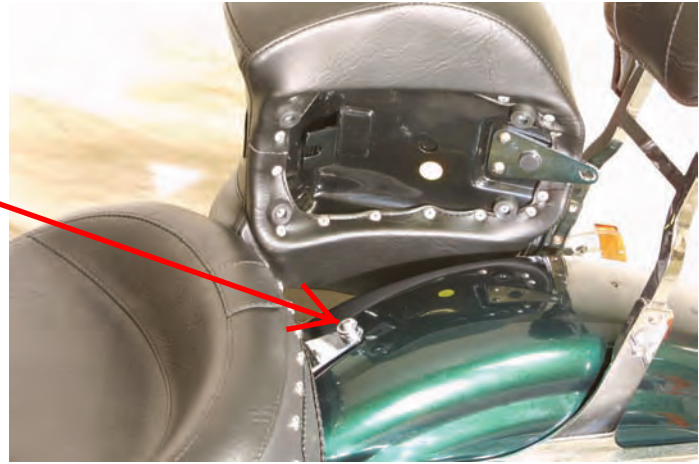

Enjoy the comfort of your new Mustang seat.



These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to [questions@mustangseats.com](mailto:questions@mustangseats.com) or visit our website at [www.mustangseats.com](http://www.mustangseats.com).

For care and maintenance of our seats, please go to our website under "Support".

Ref: part #'s 76580, 76581, 75548, 76106, 76107, 76108, 76109, 76339, 76444, 76116, 76117, 76118, 76119, 79346, 79347, 79358, 79359, 76700, 76701, 76702, 76703, 76704, 76705, 76706, 76707, 76708, 76709, 76710, 79800, 79801, 79802, 79803, 79804, 79805, 79806, 79807, 76711