
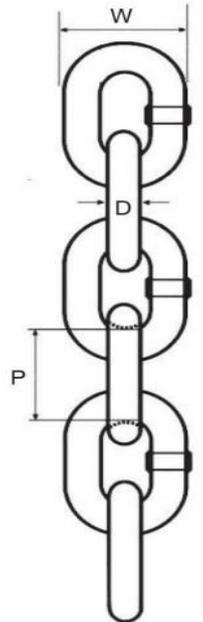


## PRODUCT DATASHEET FOR ALLOY STEEL CHAIN

Alloy steel chains are often used because of their strength, durability, abrasion resistance and ability to conform to the shape of the loads on which they are used. In addition, these slings can lift hot materials.

### PRODUCT DETAILS

- Heat treated for tensile strength, resistance to wear and shock absorbing capabilities.
- Recognizable by the T8 embossed mark.
- Used for - Chain Hoist and Lever Hoist

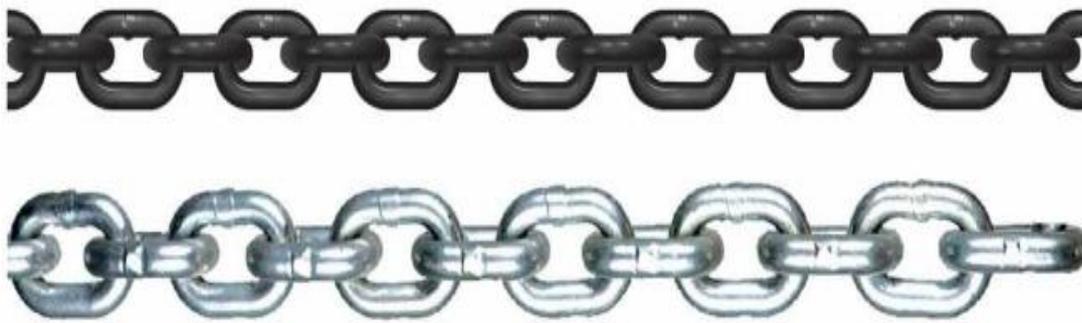

**STANDARD: EN 818-7**

TECHNICAL PARAMETERS						
Item No.	Material Diameter D(mm)	Pitch P(mm)	Outside Width W(mm)	Working Load Limit (KN)	Min. Breaking Load (KN)	Weight Kg/m
0515	5	15	17	7.84	31.38	0.55
0618	6	18	20	11.76	47.07	0.78
0631	6.3	19	22.6	12.5	49.9	0.86
0711	7.1	21	23	15.69	62.76	1.09
1824	8	24	26	19.61	78.45	1.4
0927	9	27	32.2	25	102	1.76
1030	10	30	33	31.38	125.52	2.22
0112	11.2	34	39	38	154	2.8