


Specification:

- 1) Rating (if not described next to the switch):
3 A 125 VAC; 1 A 250 VAC
- 2) Contact Resistance: 20 mW max.
- 3) Insulation Resistance: 500 VDC 100 MW min.
- 4) Dielectric strength: 1000 VAC, 1 minute
- 5) Electrical Life: 50000 cycles

PS10B2BK

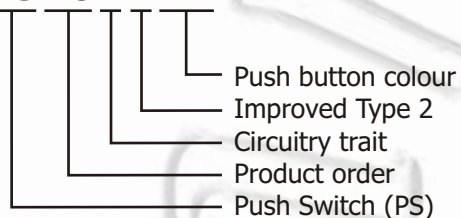

CIRCUITRY TRAIT

A	ON - OFF	Push on/Push off	With lock
B	OFF - (ON)	Push on	Momentary
C	ON - (OFF)	Push off	Momentary


() indicates momentary

PUSH BUTTON COLOUR


RD	red
GN	green
OR	orange
BU	blue
WH	white
BK	black
YL	yellow




PS11A ON-OFF
PS11B OFF-(ON)
PS11C ON-(OFF)

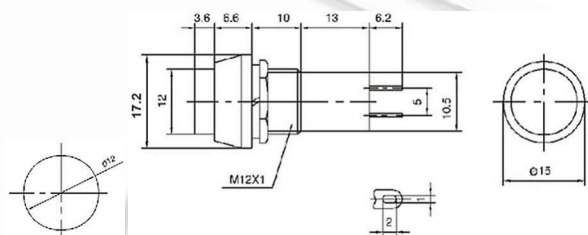


PS12A ON-OFF
PS12B OFF-(ON)
PS12C ON-(OFF)

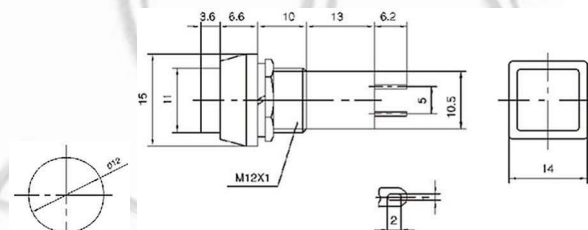


PS14A ON-OFF
PS14B OFF-(ON)
PS14C ON-(OFF)

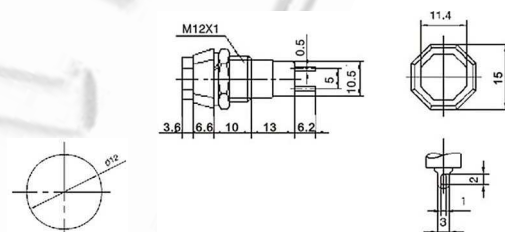


PS16A ON-OFF
PS16B OFF-(ON)
PS16C ON-(OFF)

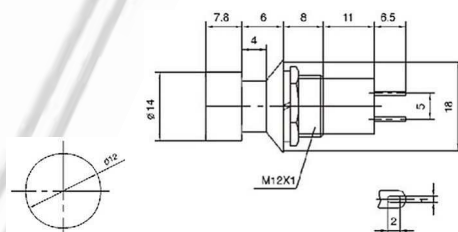

PS13B OFF-(ON)
PS13C ON-(OFF)
 8 A 125 VAC; 4 A 250 VAC

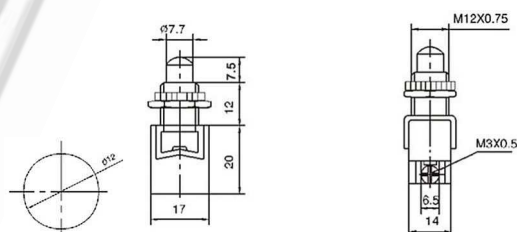


PS10B OFF-(ON)
 (plastic rod)

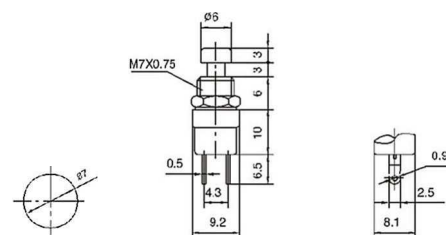





PS10B2 OFF-(ON)
PS10C2 ON-(OFF)
 (metal rod)

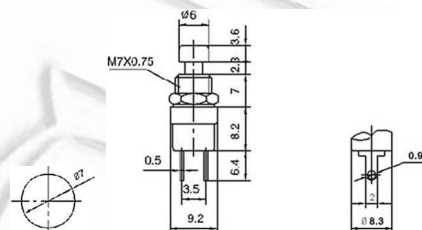


PS15A ON-OFF

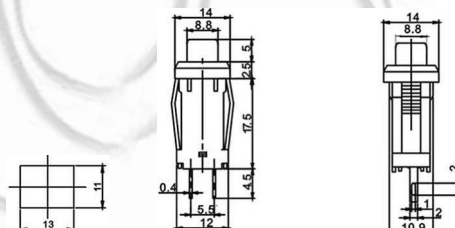


PS15B OFF-(ON)
PS15C ON-(OFF)

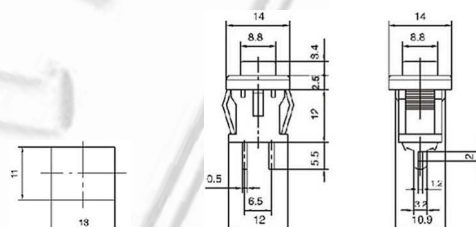


PS17A ON-OFF
 4 A 125 VAC; 2 A 250 VAC

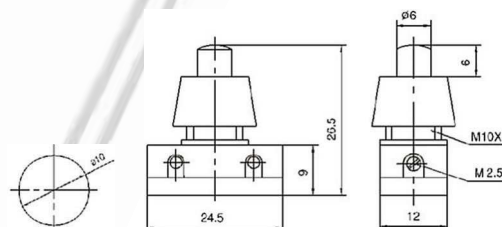

PS17A2 ON-OFF
 (PS17B)

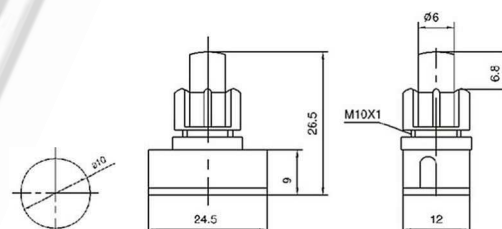


PS17A3 ON-OFF
 (PBS-17B)
 4 A 125 VAC; 2 A 250 VAC

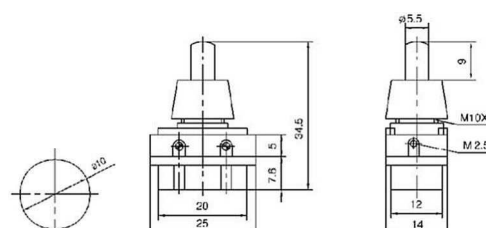





PS19B OFF-(ON)
PS19C ON-(OFF)
 5 A 125 VAC; 2.5 A 250 VAC

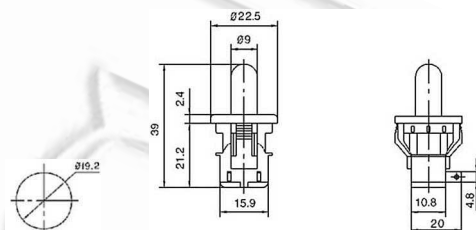


PS19B2 OFF-(ON)
PS19C2 ON-(OFF)
 5 A 125 VAC; 2.5 A 250 VAC

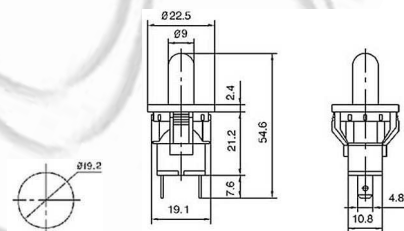


PS19B3 OFF-(ON)
PS19C3 ON-(OFF)
 5 A 125 VAC; 2.5 A 250 VAC

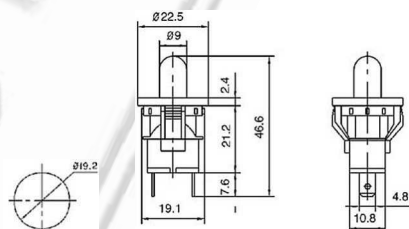


PS20A ON-OFF
PS20B OFF-(ON)

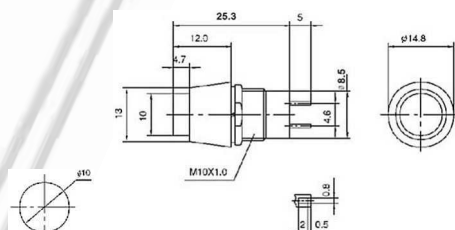

PS20A2 ON-OFF
PS20B2 OFF-(ON)

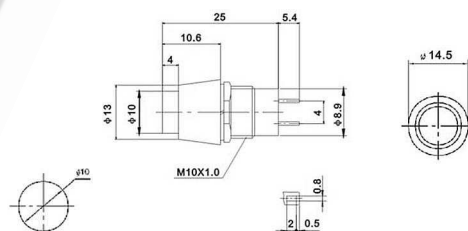


PS21A ON-OFF
PS21B OFF-(ON)

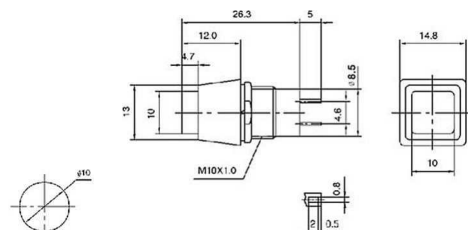





PS22A ON-OFF
PS22B OFF-(ON)

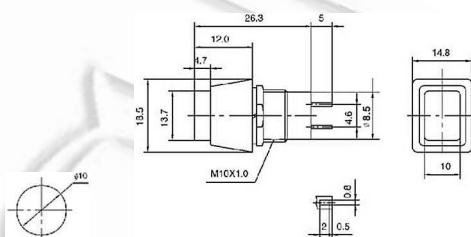


PS23B OFF-(ON)

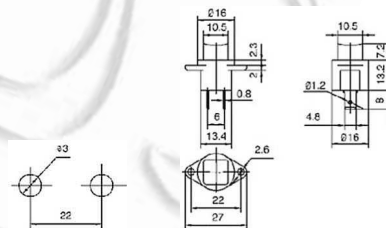


PS24B2 OFF-(ON)
PS24C2 ON-(OFF)
10 A 125 VAC; 2.5 A 250 VAC
SPST 2P

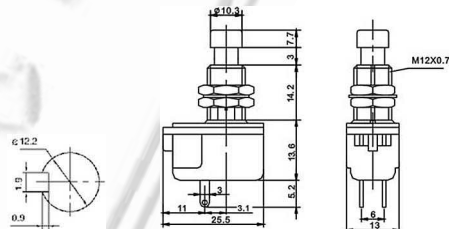


PS24102 ON-ON
PS24112 ON-(ON)
4 A 125 VAC; 2 A 250 VAC
SPDT 3P
(L=14.2, 11.8, 9.8)

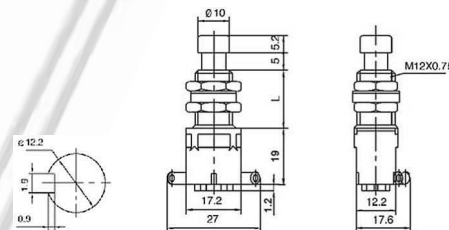

PS24202 ON-ON
PS24212 ON-(ON)
4 A 125 VAC; 2 A 250 VAC
DPDT 6P
(L=14.2, 11.8, 9.8)

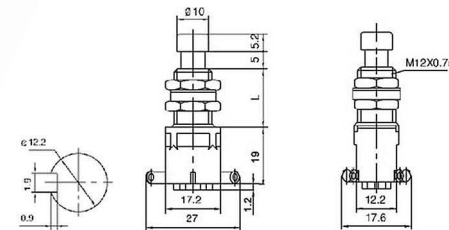

PS24102P ON-ON
PS24112P ON-(ON)
4 A 125 VAC; 2 A 250 VAC
SPDT 3P
(L=14.2, 11.8, 9.8)

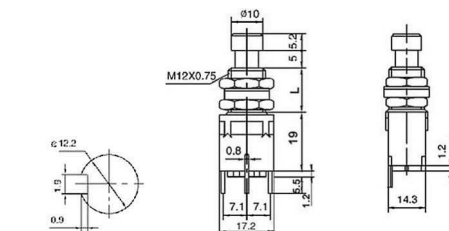

The technical drawing illustrates a bolt assembly with three views:

- Front View (Top):** Shows a bolt with a diameter of $\varnothing 10$. The total length is labeled as L . The distance from the head to the first washer is 19 . The distance between the two washers is 0.8 . The distance from the second washer to the nut is 7.1 . The distance from the nut to the end of the bolt is 7.2 .
- Side View (Bottom):** Shows the bolt profile with a diameter of $\varnothing 6$ at the head and a diameter of $\varnothing 10$ at the shank. The total length is 12.2 . The distance from the head to the start of the threaded section is 1.3 .
- End View (Right):** Shows the bolt head and nut. The nut is specified as M12X0.7.





Technical drawing of a hexagonal nut. The drawing includes four views: a front view (top left), a top view (top right), a side view (bottom left), and a cross-sectional view (bottom right). The front view shows a hexagonal nut with a central hole of diameter $\phi 22$. The top view shows the hexagonal shape with a width across flats of 12 and a width across corners of 15.7 . The side view shows the height of the nut as 18 and the thickness of the flange as 6.2 . The cross-sectional view shows the internal thread with a pitch of $M19 \times 0.75$ and a central hole of diameter $\phi 14.6$. The drawing also includes a dimension of $\phi 19$ for the outer diameter of the flange and a dimension of $M2.5$ for the central hole.



Technical drawing of a lamp post (Lampenmast) showing three views: front view, side view, and top view. The drawing includes the following dimensions and specifications:

- Front View:**
 - Top flange diameter: $\phi 22$
 - Flange thickness: $\phi 17.4$
 - Main body height: 22.5
 - Base height: 23.5
 - Base width: 6.5
 - Base mounting holes: $\phi 3.6$
 - Base mounting holes: M16 x 10 - 25
- Side View:**
 - Shows the profile of the lamp post with a height of 22.5.
 - Base specification: M2 5
- Top View:**
 - Shows the hexagonal base with a width of 12.
 - Section line A-A is indicated.