


Specification:

- 1) Rating (if not described next to the switch):
3 A 125 VAC; 1 A 250 VAC
- 2) Contact Resistance: 20 mW max.
- 3) Insulation Resistance: 500 VDC 100 MW min.
- 4) Dielectric strength: 1000 VAC, 1 minute
- 5) Electrical Life: 50000 cycles

PS10B2BK

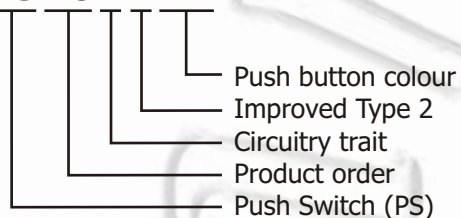

CIRCUITRY TRAIT

A	ON - OFF	Push on/Push off	With lock
B	OFF - (ON)	Push on	Momentary
C	ON - (OFF)	Push off	Momentary


() indicates momentary

PUSH BUTTON COLOUR


RD	red
GN	green
OR	orange
BU	blue
WH	white
BK	black
YL	yellow




PS11A ON-OFF
PS11B OFF-(ON)
PS11C ON-(OFF)

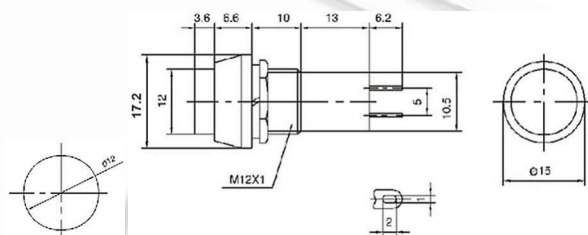


PS12A ON-OFF
PS12B OFF-(ON)
PS12C ON-(OFF)

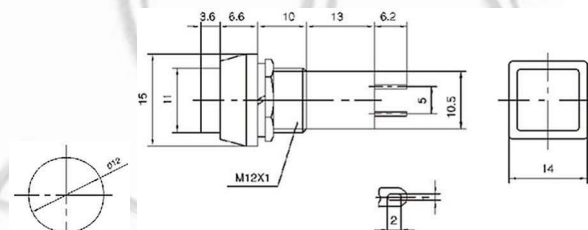


PS14A ON-OFF
PS14B OFF-(ON)
PS14C ON-(OFF)

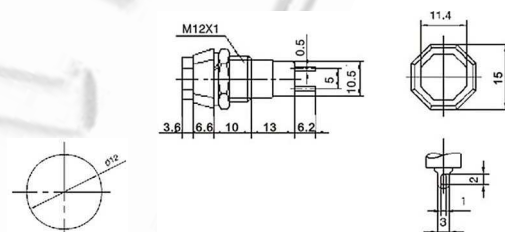


PS16A ON-OFF
PS16B OFF-(ON)
PS16C ON-(OFF)

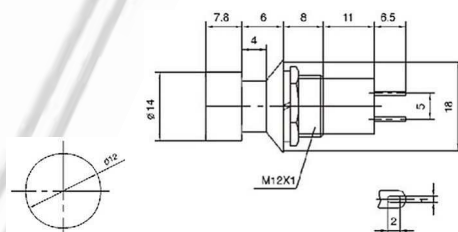

PS13B OFF-(ON)
PS13C ON-(OFF)
 8 A 125 VAC; 4 A 250 VAC

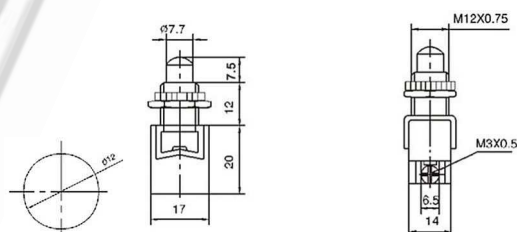


PS10B OFF-(ON)
 (plastic rod)

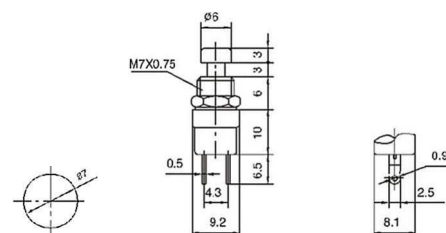





PS10B2 OFF-(ON)
PS10C2 ON-(OFF)
 (metal rod)

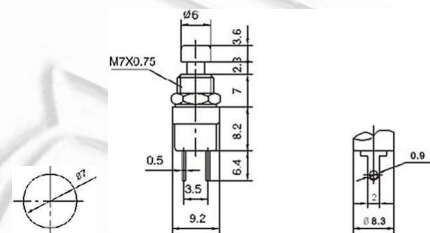


PS15A ON-OFF

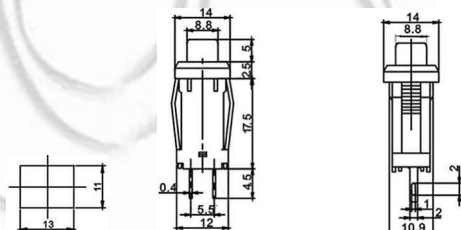


PS15B OFF-(ON)
PS15C ON-(OFF)

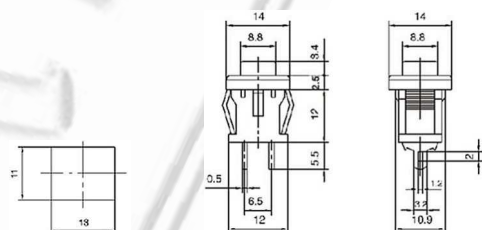


PS17A ON-OFF
 4 A 125 VAC; 2 A 250 VAC

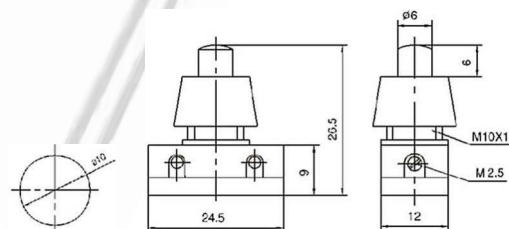

PS17A2 ON-OFF
 (PS17B)

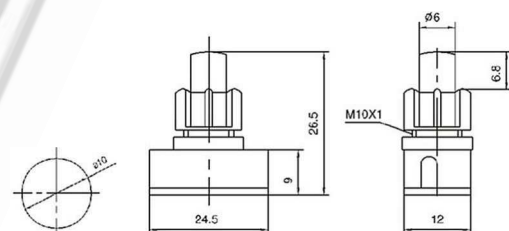


PS17A3 ON-OFF
 (PBS-17B)
 4 A 125 VAC; 2 A 250 VAC

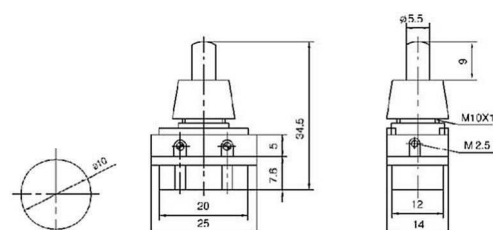





PS19B OFF-(ON)
PS19C ON-(OFF)
 5 A 125 VAC; 2.5 A 250 VAC

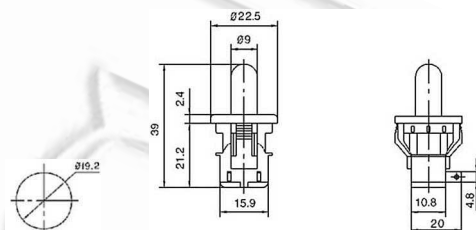


PS19B2 OFF-(ON)
PS19C2 ON-(OFF)
 5 A 125 VAC; 2.5 A 250 VAC

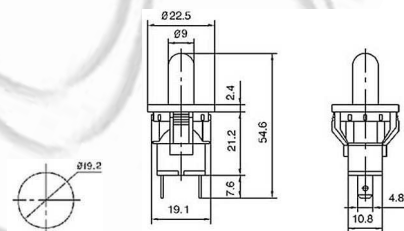


PS19B3 OFF-(ON)
PS19C3 ON-(OFF)
 5 A 125 VAC; 2.5 A 250 VAC

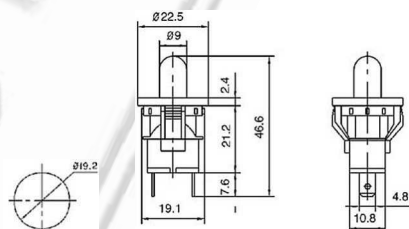


PS20A ON-OFF
PS20B OFF-(ON)

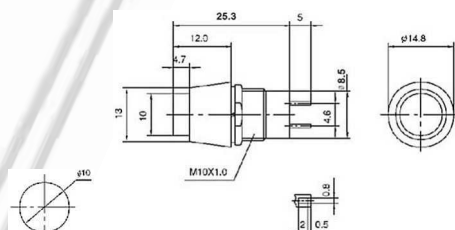

PS20A2 ON-OFF
PS20B2 OFF-(ON)

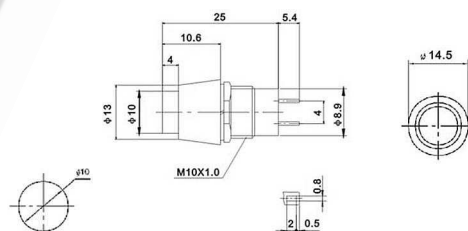


PS21A ON-OFF
PS21B OFF-(ON)

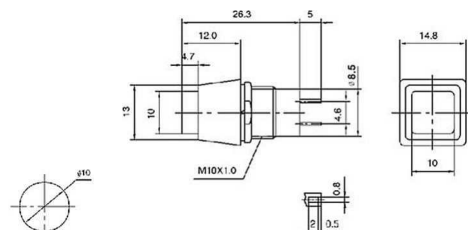





PS22A ON-OFF
PS22B OFF-(ON)

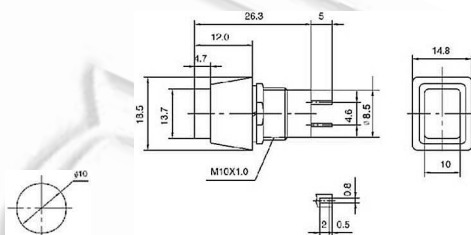


PS23B OFF-(ON)

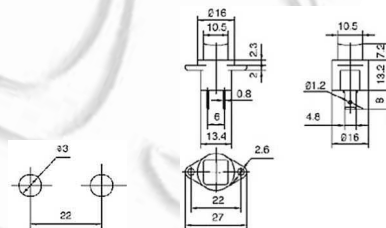


PS24B2 OFF-(ON)
PS24C2 ON-(OFF)
10 A 125 VAC; 2.5 A 250 VAC
SPST 2P

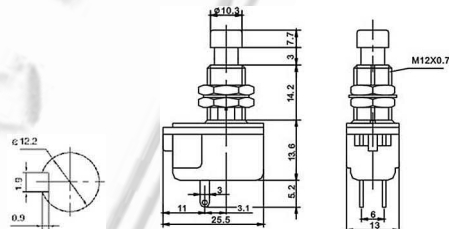


PS24102 ON-ON
PS24112 ON-(ON)
4 A 125 VAC; 2 A 250 VAC
SPDT 3P
(L=14.2, 11.8, 9.8)

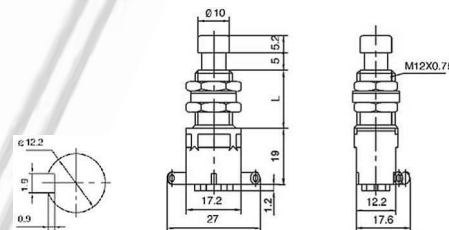

PS24202 ON-ON
PS24212 ON-(ON)
4 A 125 VAC; 2 A 250 VAC
DPDT 6P
(L=14.2, 11.8, 9.8)

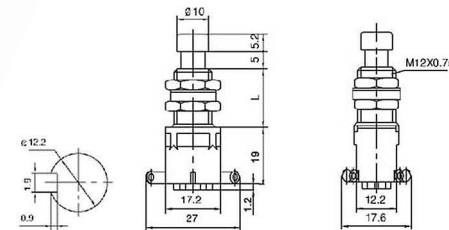

PS24102P ON-ON
PS24112P ON-(ON)
4 A 125 VAC; 2 A 250 VAC
SPDT 3P
(L=14.2, 11.8, 9.8)

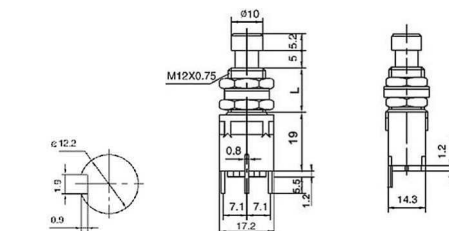

Technical drawing of a 12.2mm diameter bolt. The drawing includes a side view, a top view, and a cross-sectional view. Dimensions are provided in millimeters (mm). The side view shows a total length of 19.0 mm, with a threaded section of 12.2 mm. The top view shows a circular head with a diameter of 12.2 mm. The cross-sectional view shows the internal thread and a central hole with a diameter of 0.8 mm. The drawing is labeled with 'M12X0.7' and '12.2'.



[illegible]

The technical drawing illustrates a hexagonal nut through four distinct views:

- Front View (Top Left):** A circular cross-section with a diameter dimensioned as $\phi 19$.
- Top View (Bottom Left):** A detailed view of the hexagonal base. It shows a central hole with a diameter of $\phi 14.6$, two smaller holes with a diameter of $\phi 2$, and a mounting flange with a diameter of $\phi 22$. The overall width of the base is $M19 \times O.75$. Vertical dimensions indicate a height of 1.2 for the top section, 15.7 for the main body, and 18 for the total height.
- Side View (Middle Right):** A perspective view of the nut's profile, highlighting its hexagonal shape and the central threaded hole.
- End View (Bottom Right):** A hexagonal cross-section labeled "A向". It features a central hole with a diameter of $\phi 14.6$ and a thread specification of $M2.5$.



Technical drawing of a lamp post (Lampenmast) showing three views: front view, side view, and top view. The front view shows a cylindrical body with a diameter of $\phi 22$ at the top, a diameter of $\phi 17.4$ for the upper section, and a diameter of $\phi 16$ for the lower section. The total height is 23.5, with a section cut A-A indicated. The side view shows a cylindrical body with a diameter of $\phi 16$ and a height of 23.5. The top view shows a hexagonal base with a diameter of $\phi 16$ and a height of 23.5. The drawing includes dimensions for the mounting bracket (M16 x 10-25) and the mounting hole (M2.5).