


## DS-KIS604-P(C) IP Video Intercom Bundle

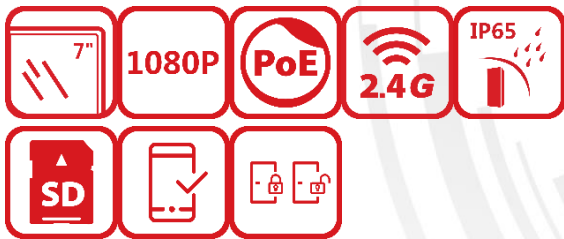

- IP video intercom kit for villa or house
- One call button for easier calls
- Convenient Hik-Connect APP Mobile Control
- Stores messages and captured pictures in the TF card
- Including: DS-KV8113-WME1(C) × 1, DS-KH6320-WTE1 × 1, PSU × 2, 16 GB TF card × 1
- Power adapter included in the package

*\*IP video intercom kit for villa or house, only one call button.*

*\*DS-KV8113-WME1(C) x1*

*\*DS-KH6320-WTE1 x1*

*\*PSU x2*

*\*16GB TF card x1*

## ▪ Specification


|                            |                                                     |
|----------------------------|-----------------------------------------------------|
| <b>Door station</b>        |                                                     |
| <b>System parameters</b>   |                                                     |
| Operation system           | Embedded Linux operation system                     |
| Flash                      | 32 M                                                |
| RAM                        | 256 M                                               |
| <b>Video parameters</b>    |                                                     |
| Supplement light           | IR supplement                                       |
| Resolution                 | Main stream : 1920 × 1080<br>Sub stream : 640 × 480 |
| Lens                       | 1                                                   |
| WDR                        | Support                                             |
| FOV                        | Horizontal: 124° Vertical: 75°                      |
| Video compression standard | H.264                                               |
| <b>Audio parameters</b>    |                                                     |
| Audio input                | Built-in omnidirectional microphone                 |
| Audio output               | Built-in loudspeaker (more than 80 dB within 30 cm) |
| Volume adjustment          | Adjustable                                          |
| Audio compression standard | G.711 U, G.711 A                                    |
| Audio compression Rate     | 64 Kbps                                             |
| Audio intercom             | Two-way audio communication                         |
| Audio quality              | Noise suppression and echo cancellation             |
| <b>Capacity parameters</b> |                                                     |
| User capacity              | 2000                                                |
| <b>Network parameters</b>  |                                                     |
| Network protocol           | TCP/IP, RTSP                                        |
| Wi-Fi                      | Wi-Fi 802.11 b/g/n                                  |
| Wired network              | 10/100 Mbps self-adaptive Ethernet                  |
| 3G/4G                      | /                                                   |
| Bluetooth                  | /                                                   |
| <b>Device interface</b>    |                                                     |
| Network interface          | 1                                                   |
| RS-485                     | 2                                                   |
| Wiegand                    | 0                                                   |
| Lock control               | 2                                                   |
| Exit button                | 2 Max.                                              |
| Door contact               | 2                                                   |
| Alarm input                | 4                                                   |
| Alarm output               | 0                                                   |
| Power interface            | 1                                                   |
| TAMPER                     | 1                                                   |
| USB interface              | 0                                                   |
| TF card                    | 1 (reserved)                                        |
| <b>General</b>             |                                                     |
| Button                     | 1                                                   |

|                            |                                                |
|----------------------------|------------------------------------------------|
| Power consumption          | < 10 W                                         |
| Indicator                  | 3                                              |
| Working temperature        | -40° C to 53° C (-40° F to 127.4° F)           |
| Power supply               | Standard PoE/12 VDC                            |
| Working humidity           | 10% to 95%                                     |
| Dimension                  | 174 mm × 91 mm × 29 mm                         |
| Installation               | Surface mounting                               |
| Application environment    | Outdoor                                        |
| Protection level           | IP65, IK08                                     |
| Weight                     | 380 g                                          |
| Indicator                  | 3                                              |
| Power supply               | IEEE802.3af, standard PoE<br>12 VDC            |
| <b>Indoor station</b>      |                                                |
| <b>System parameters</b>   |                                                |
| Operation system           | Embedded Linux operation system                |
| Memory                     | 128 MB                                         |
| Flash                      | 32 MB                                          |
| <b>Display parameters</b>  |                                                |
| Display screen             | 7-inch colorful TFT screen                     |
| Display resolution         | 1024 × 600                                     |
| Operation method           | Capacitive touch screen                        |
| <b>Audio parameters</b>    |                                                |
| Audio input                | Built-in omnidirectional microphone            |
| Audio output               | Built-in loudspeaker                           |
| Audio quality              | Noise suppression and echo cancellation        |
| Audio compression standard | G.711 U                                        |
| Audio compression Rate     | 64 Kbps                                        |
| <b>Network parameters</b>  |                                                |
| Wired network              | 10/100 Mbps self-adaptive                      |
| Network interface          | 1 RJ-45 10/100 Mbps self-adaptive              |
| Wireless network           | Wi-Fi 802.11 b/g/n                             |
| Protocol                   | TCP/IP, SIP, RTSP                              |
| <b>Device interface</b>    |                                                |
| RS-485                     | 1                                              |
| Alarm input                | 8-ch alarm inputs                              |
| Relay output               | 2                                              |
| TF card                    | Max to 32 G, SD 2.0 or lower version           |
| <b>General</b>             |                                                |
| Power consumption          | ≤ 6 W                                          |
| Power supply               | Standard PoE, 12VDC                            |
| Working temperature        | -10 °C to 55 °C (14 °F to 131 °F)              |
| Working humidity           | 10% to 90%                                     |
| Dimension (L x W x H)      | 200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6") |

## ▪ Available Model

DS-KIS604-P(C)

## ▪ Dimension

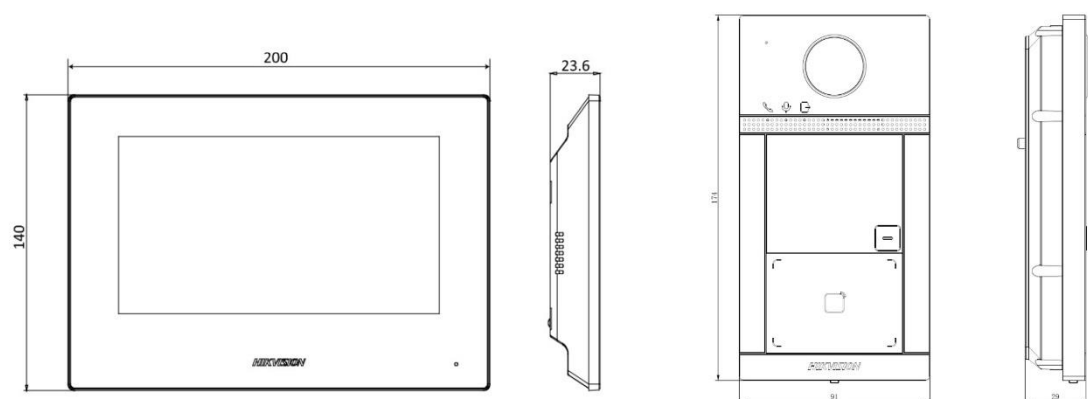

Unit: mm

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq