

SZ-130-M

Warranty


- ♦ 5 years Manufacturer Warranty
- ♦ Warranty on Electrical Performance : 8 years power output

Manufacturing

- ♦ Original cell sorting system ensures the best of cells' electric match
- ♦ EL-Testing before packing
- ♦ Comprehensive module power testing, 100% positive output tolerance guaranteed

Performance

- ♦ High module conversion efficiency
- ♦ High-quality cells and partial-cell design lower series resistance and reduce power degradation
- ♦ Optimized performance under low light conditions and with the integrated bypass-diodes, the panel can still work when partially shaded
- ♦ IP67 rated junction box, reliable cables and standard MC4 connectors improves the stability

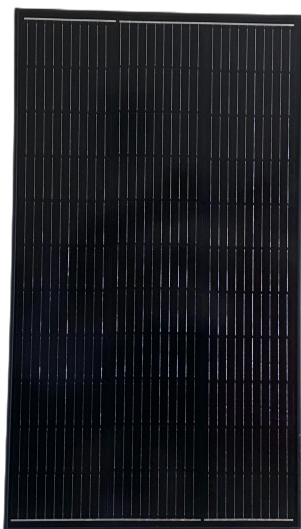

Mechanical Data

Standard Test Conditions AM=1.5, E=1000W/m², TC=25°C

Nominal Power	130WMono
Cell Type	crystalline
Cell Efficiency	≥22%
Maximum Power Current (Impp)	6.8A
Maximum Power Voltage (Vmpp)	19.14V
Open-circuit Voltage (Voc)	22.44V
Short-circuit Current (Isc)	7.2A
Maximum System Voltage	500V
Output Tolerance	0~+3%
Cable	700mm / 2.5mm ²
Connector Type	MC4 / MC4 Compatible
Module Structure	Aluminum Frame / Glass / EVA / Backsheet
Junction box rating	≥IP67
Diode	√
Working Temperature	-40°C~+80°C

Packaging

Module Dimensions	1160*540*30mm
Module Weight	6.3kg
Package	Pallet
Pieces per Pallet	30
Gross Weight per Pallet	236kg
Pallet Dimensions	1.2*1.1*0.75M

SOLMAX NEW ENERGY B.V.

Address: Defensiedok 18,3433 KL, Nieuwegein, The Netherlands
 Tel: +31-307 855 708
 E-mail: info1@solarfam.nl

