



19" Power Distribution Unit, 7 way German Sockets, 3 Lights Surge Protection with Filtering and Overload Protection

Technical Features

1U rack mountable design

IEC 60297: 482.6 mm (19") mounting

Robust aluminum housing, IP20

Sockets: 7x German type socket CEE7/3, 45° angled

2 m connection cable H05VVF $3x1.5 \text{ mm}^2$ with Safety plug CEE 7/7, angled


Power: 230 Vac 50 Hz/16 A, max. 3600 W

3 lights surge protection with filtering and overload protection

Works with data centers, server rooms and Telecom equipment

Color: Black

Technical Drawing

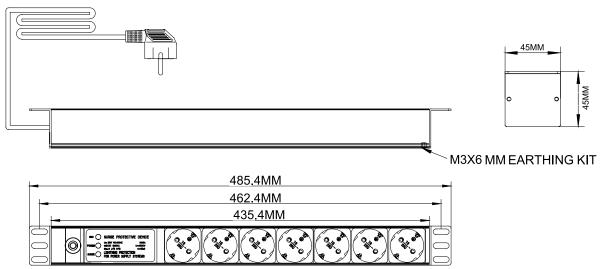



www.2direct.de





| - | | | - 4 | • |
|----|-----|----|------|-----|
| Sr |)6(| ши | cati | เดท |
| - | | | | |

| Rated Voltage | 250 V |
|---|-----------------|
| Rated Frequency | 50 Hz |
| Rated Load Current | 16 A |
| Maximum Continuous Operating Voltage Uc | 300 V |
| Nominal Discharge Current In (8/20) μ s | 9 kA |
| Maximum Discharge Current Imax (8/20) μ s | 9 kA |
| Response Time | ≤50 mS |
| Surge Energy | 375 J |
| Leakage Current | 0.2 mA |
| Protection Mode | L-N, L-PE, N-PE |

Package Contents

1x 19" Power Distribution Unit

1x Screw Package

1x User Manual

Packaging Information

| Packing Dimension | 515 x 95 x 60 mm |
|-------------------|--------------------|
| Packing Weight | 0.98 kg |
| Carton Dimension | 530 x 320 x 220 mm |
| Carton Q'ty | 10 pcs |
| Carton Weight | 10.3 kg |







www.2direct.de

