

CRP2

Panasonic

LITHIUM MANGANESE DIOXIDE



Features & Benefits

- Operating temperature range between -40°C to $+70^{\circ}\text{C}$
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability

Specifications

Nominal Capacity: 1400 mAh


Nominal Voltage: 6V

Weight: Approximately 37g


Operating Temperature: -40°C - $+70^{\circ}\text{C}$ *

*Please consult Panasonic for use below and above -20°C to $+60^{\circ}\text{C}$

Dimensions

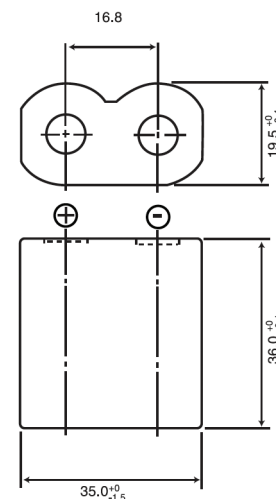

Temperature Characteristics

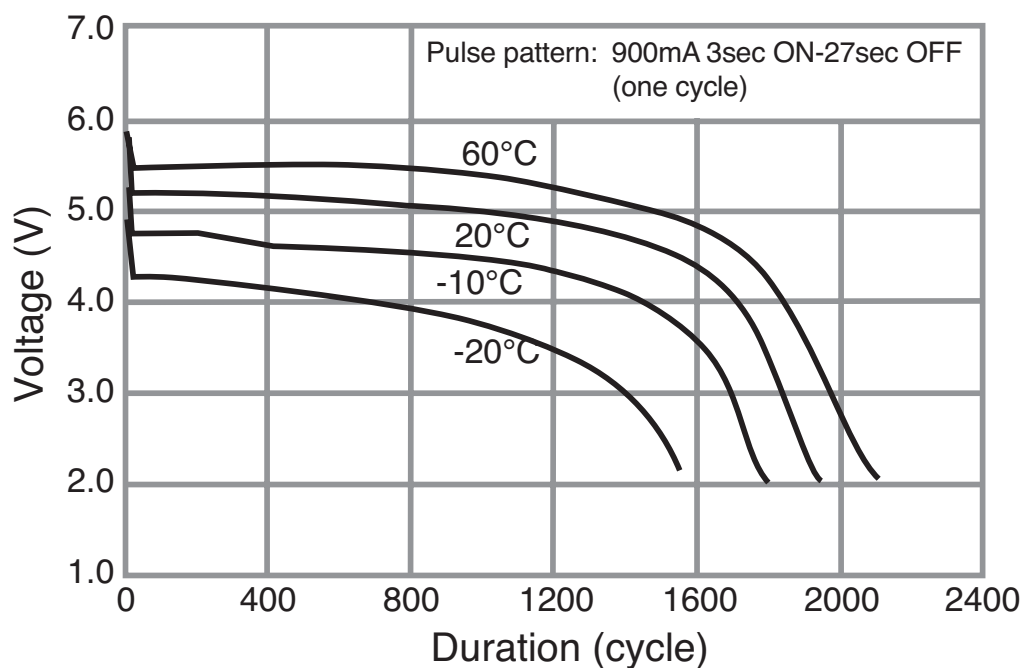

*Please consult Panasonic for use below and above -20°C to $+60^{\circ}\text{C}$