


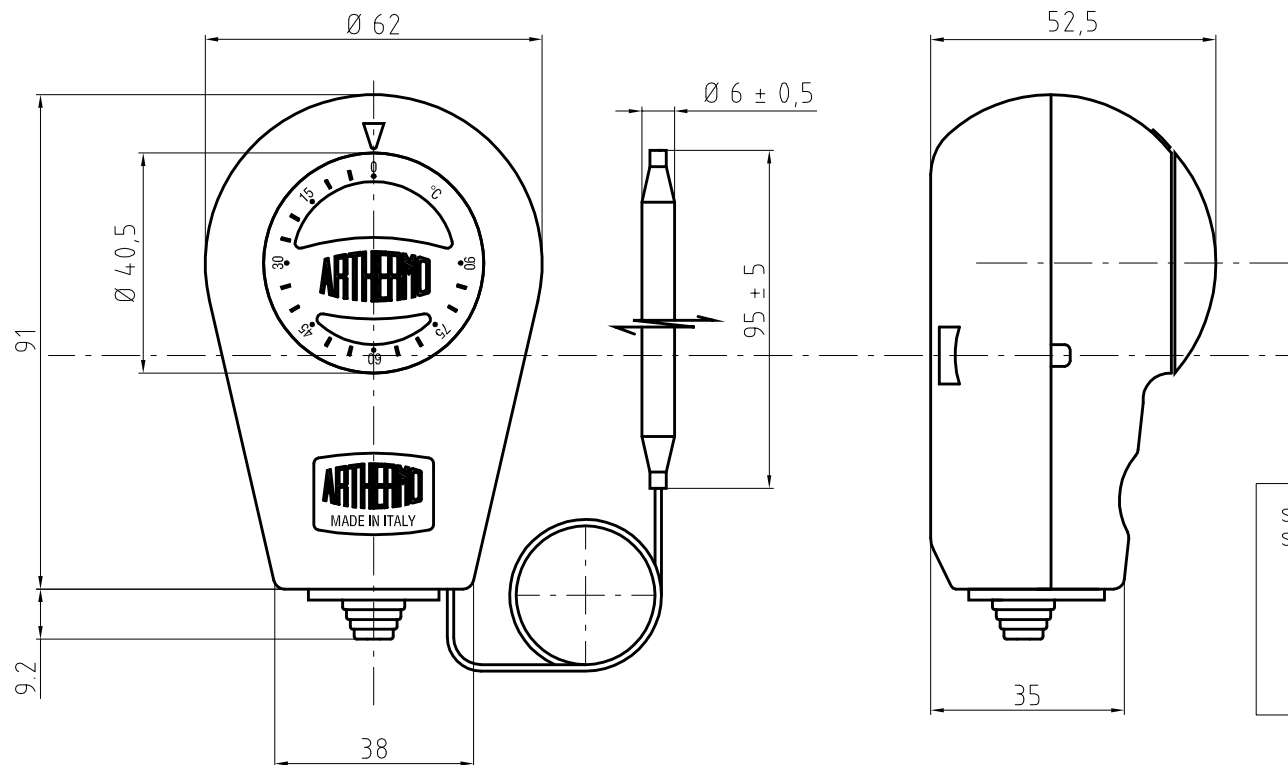


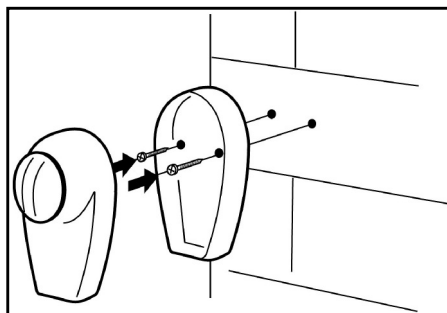

SCHEMA ELETTRICO / ELECTRIC DIAGRAM
S.P.D.T.



SISTEMA DI FISSAGGIO
FIXING SYSTEM

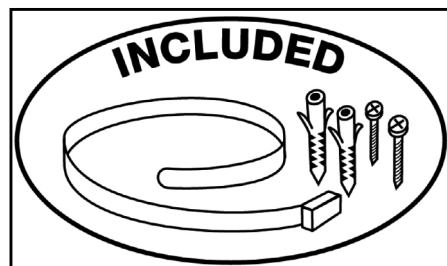

ACCESSORI / ACCESSORIES

DATI TECNICI - THECNICAL DATA	
SCALA RANGE:	0/90°C
DIFFERENZIALE / DIFFERENTIAL :	$4 \pm 2,5^{\circ}\text{C}$
TOLL. VALORI F.S.	$\pm 3^{\circ}\text{C}$
CAPILLARE / CAPILLARY :	MM 1500 RAME / COPPER OR INOX CAPILLARY
INVOLUCRO MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C
SERIGRAFIA / DIAL :	RED KNOB - WHITE NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY :	C1 15(3)A 400 VAC - C2 2,5(0,6)A 400 VAC
MINIMUM CORRENT.:	200 mA
INSULATION RESISTANCE :	>100 M ohm
TEST DI VITA / LIFE OF PRODUCT :	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	70°C
GRADO TENUTA / IP GRADE :	IP 40

MODIFICA		DOC.RIF.	DATA	APPARECCHIO ASSIEME		
				PARTICOLARE ARTH097		
1				MATERIALE	DISEGNATO A. SALA	APPROVATO SALA A.
2				TRATTAMENTO	SCALA 1 : 1	DATA 11/11/2011
3				NOTE	CODICE	ARTH097
4						
5						