


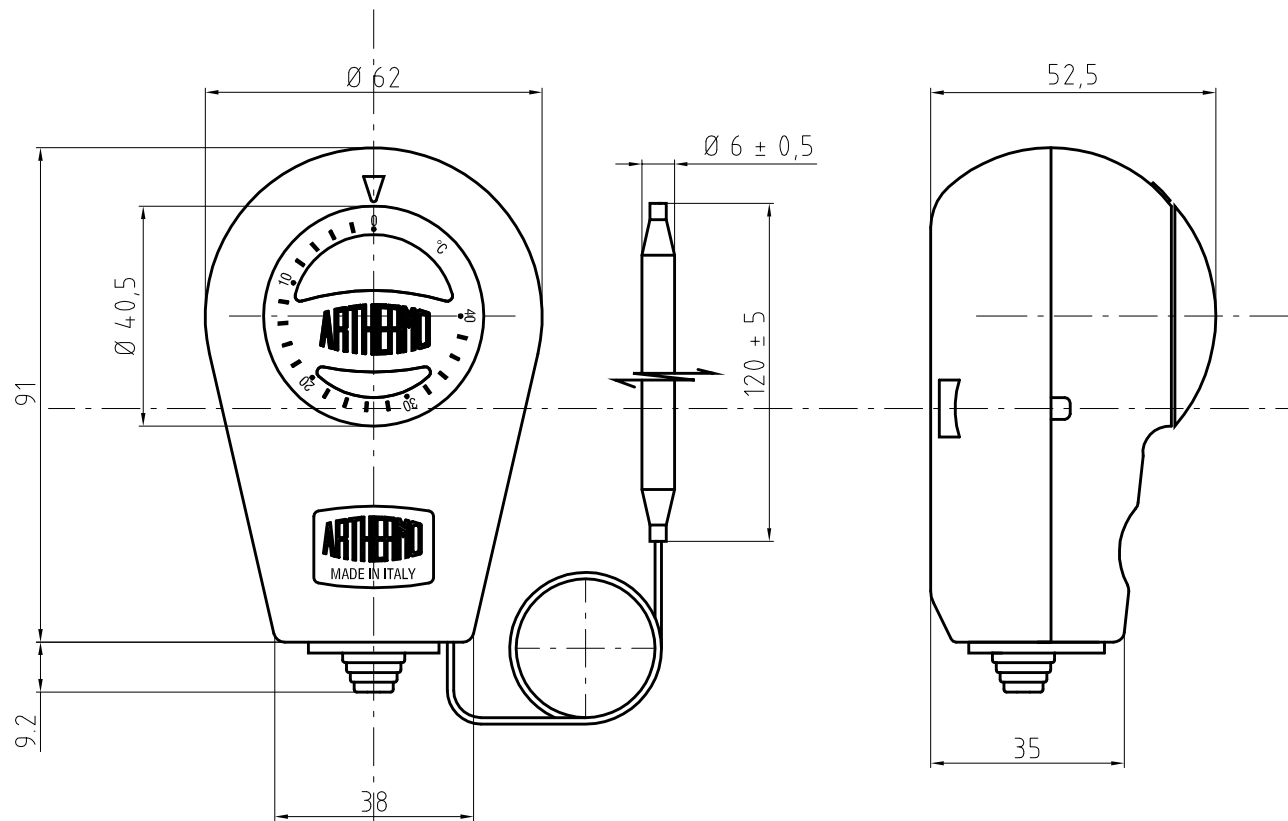


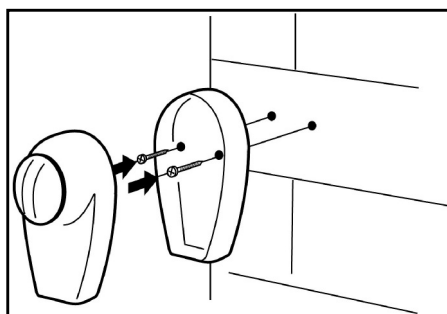

SCHEMA ELETTRICO / ELECTRIC DIAGRAM
S.P.D.T.



SISTEMA DI FISSAGGIO
FIXING SYSTEM

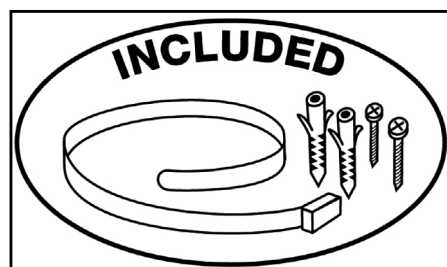

ACCESSORI / ACCESSORIES

DATI TECNICI - THECNICAL DATA	
SCALA RANGE:	0 / 40°C
DIFFERENZIALE / DIFFERENTIAL :	4 ± 2°C
TOLL. VALORI F.S.	± 3°C
CAPILLARE / CAPILLARY :	MM 1500 RAME NICHELATO / NICKEL PLATED OR INOX CAPILLARY
INVOLUCRO MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C
SERIGRAFIA / DIAL :	RED KNOB - WHITE NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY :	C1 15(3)A 400 VAC C2 2,5(0,6)A 400VAC
MINIMUM CORRENT.:	200 mA
INSULATION RESISTANCE :	>100 M ohm
TEST DI VITA / LIFE OF PRODUCT :	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	70°C
GRADO TENUTA / IP GRADE :	IP 40

MODIFICA		DOC.RIF.	DATA	APPARECCHIO ASSIEME		
1				PARTICOLARE ARTH096		
2				MATERIALE	DISEGNATO A. SALA	APPROVATO SALA A.
3				TRATTAMENTO	SCALA 1 : 1	DATA 11/11/2011
4				NOTE	CODICE	
5					ARTH096	