


# Compact Telehandlers

Regulatory area: EU

## TF33.7

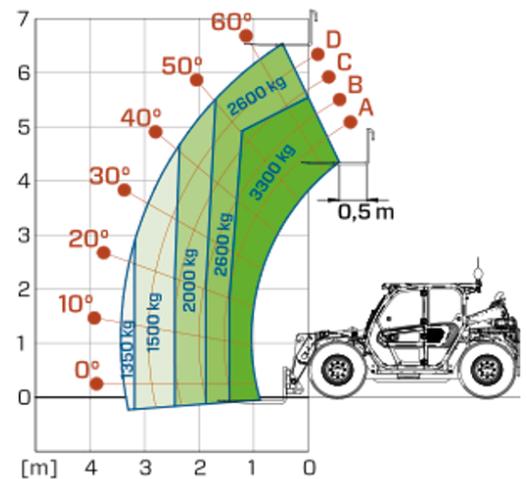

MODEL	TF33.7-G	TF33.7-LG	TF33.7-115	TF33.7-115L
A - Length (mm)	4310	4310	4310	4310
C - Wheelbase (mm)	2740	2740	2740	2740
F - Ground clearance (mm)	290	290	290	290
H - Width (mm)	2100	2100	2100	2100
M - Cab width (mm)	1010	1010	1010	1010
P - Height (mm)	2120	2020	2120	2020
S - Fork steering range (mm)	4660	4660	4660	4660

MODEL	TF33.7-G	TF33.7-LG	TF33.7-115	TF33.7-115L
<b>PERFORMANCE</b>				
Unladen weight (kg)	6400	6400	6700	6700
Maximum load capacity (kg)	3300	3300	3300	3300
Lift height (m)	6.6	6.6	6.6	6.6
Maximum reach (m)	3.5	3.5	3.5	3.5
Boom side-shift (mm)	—	—	—	—
Frame levelling (%)	—	—	—	—
Boom section	2	2	2	2
<b>POWERTRAIN</b>				
Engine	REHLKO 2504	REHLKO 2504	DEUTZ TCD 3.6	DEUTZ TCD 3.6
Range/Cylinders (l)	2.5/4	2.5/4	3.6/4	3.6/4
Engine power (kW/HP)	55.4/75.1	55.4/75.1	85/115	85/115
Anti-pollution technology	Stage V - DOC + DPF	Stage V - DOC + DPF	Stage V - SCR + DOC + DPF	Stage V - SCR + DOC + DPF
Reversible Fan	●	●	●	●
Maximum speed (km/h)	40	40	40	40
Fuel tank capacity (l)	85	85	85	85
AdBlue tank capacity (l)	—	—	12	12
Hydrostatic transmission EPD	●	●	●	●
Electronic joystick	—	—	●	●
Axles	Axial	Axial	Axial	Axial
Brakes	Dry discs	Dry discs	Dry discs	Dry discs
<b>HYDRAULIC</b>				
Delivery / pressure (bar-l/min)	98-210	98-210	125-210	125-210
Hydraulic oil tank capacity (l)	85	85	85	85
<b>CAB</b>				
ASCS	—	—	Light	Light
FOPS/ROPS Cab	●	●	●	●
Tilting cab	—	—	—	—
<b>CONFIGURATION</b>				
Hydropneumatic Suspension CS Merlo	—	—	—	—
Frame suspension	—	—	—	—
Permanent four-wheel drive	●	●	●	●
Three steering way	●	●	●	●
Standard tyres	400/70-20"	400/70-20"	400/70-20"	400/70-20"
Hydraulically controlled stabilizers	—	—	—	—
Turret rotation	—	—	—	—
PTO (rpm)	—	—	—	—
3-point rear linkage (kg)	—	—	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



**MERLO S.P.A.**

Via Nazionale, 9  
12010 S. Defendente di Cervasca, (Cuneo) Italia  
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 25/02/2026 - 10:42

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.