


High Capacity Telehandlers

Regulatory area: EU
P72.10

MERLO

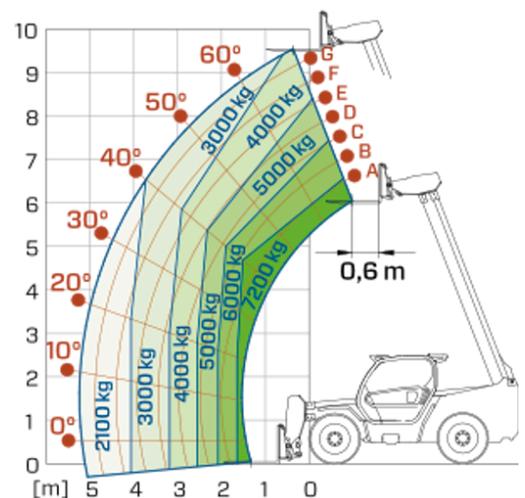

MODEL	P72.10PLUS	P72.10CSTOP
A - Length (mm)	5480	5480
C - Wheelbase (mm)	2920	2920
F - Ground clearance (mm)	450	450
H - Width (mm)	2310	2310
M - Cab width (mm)	1010	1010
P - Height (mm)	2500	2500
S - Fork steering range (mm)	4990	4990

MODEL	P72.10PLUS	P72.10CSTOP
PERFORMANCE		
Unladen weight (kg)	11300	11500
Maximum load capacity (kg)	7200	7200
Lift height (m)	9.55	9.55
Maximum reach (m)	5.2	5.2
Boom side-shift (mm)	+/- 250	+/- 250
Frame levelling (%)	+/- 8	+/- 8
Boom section	2	2
POWERTRAIN		
Engine	PERKINS 904	PERKINS 904
Range/Cylinders (l)	3.6/4	3.6/4
Engine power (kW/HP)	85.9/116.8	100/136
Anti-pollution technology	Stage V - SCR + DOC + DPF	Stage V - SCR + DOC + DPF
Reversible Fan	●	●
Maximum speed (km/h)	40	40
Fuel tank capacity (l)	140	140
AdBlue tank capacity (l)	16	16
Hydrostatic transmission EPD	●	●
Electronic joystick	●	●
Axles	Drop portal	Drop portal
Brakes	Dry discs	Dry discs
HYDRAULIC		
Delivery / pressure (bar-l/min)	108-250	139-250
Hydraulic oil tank capacity (l)	100	100
CAB		
ASCS	Full	Full
FOPS/ROPS Cab	●	●
Tilting cab	—	—
CONFIGURATION		
Hydropneumatic Suspension CS Merlo	—	●
Frame suspension	—	—
Permanent four-wheel drive	●	●
Three steering way	●	—
Standard tyres	400/70-24"	400/70-24"
Hydraulically controlled stabilizers	—	—
Turret rotation	—	—
PTO (rpm)	—	—
3-point rear linkage (kg)	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.

Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 25/02/2026 - 10:5

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.