
Stabilized Telehandlers

Regulatory area: EE

P40.17



MODEL	P40.17EE
Length (mm)	5970
Wheelbase (mm)	2950
Ground clearance (mm)	450
Width (mm)	2420
Cab width (mm)	1010
Height (mm)	2500
Fork steering range (mm)	5160

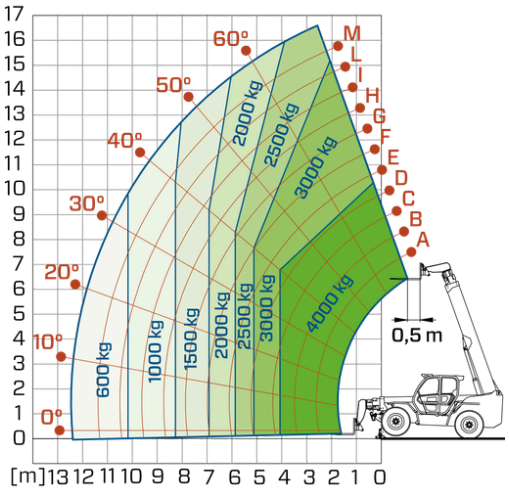

MODEL	P40.17EE
PERFORMANCE	
Unladen weight (kg)	11520
Maximum load capacity (kg)	4000
Lift height (m)	16.6
Maximum reach (m)	12.4
Boom side-shift (mm)	+/- 435
Frame levelling (%)	+/- 8
Boom section	4
POWERTRAIN	
Engine	PERKINS 904
Range/Cylinders (l)	3.6/4
Engine power (kW/HP)	85.9/116.8
Anti-pollution technology	Tier 3
Reversible Fan	●
Maximum speed (km/h)	40
Fuel tank capacity (l)	140
AdBlue tank capacity (l)	—
Hydrostatic transmission EPD	●
Electronic joystick	●
Axles	Drop portal
Brakes	Dry discs
HYDRAULIC	
Delivery / pressure (bar-l/min)	108-250
Hydraulic oil tank capacity (l)	100
CAB	
ASCS	Light
FOPS/ROPS Cab	●
Tilting cab	—
CONFIGURATION	
Hydropneumatic Suspension CS Merlo	—
Frame suspension	—
Permanent four-wheel drive	●
Three steering way	●
Standard tyres	400/70-24"
Hydraulically controlled stabilizers	Narrow
Turret rotation	—
PTO (rpm)	—
3-point rear linkage (kg)	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer

MERLO S.P.A.
Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111
info@merlo.com www.merlo.com

Release 28/07/2026 - 6:52

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.