


Medium Capacity Telehandlers

Regulatory area: AU
TF38.10TT

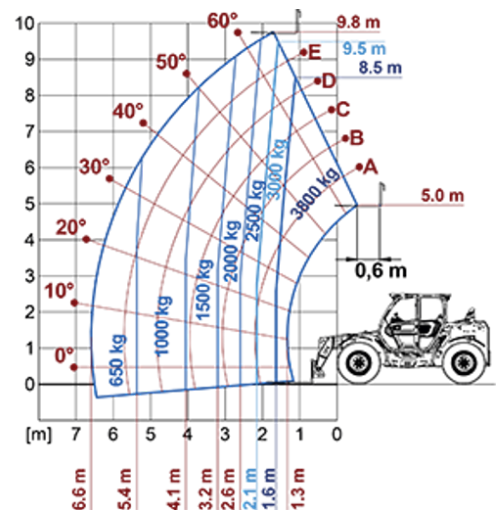


MODEL	TF38.10TT-136	TF38.10TTCS-136
A - Length (mm)	4760	4760
C - Wheelbase (mm)	2810	2810
F - Ground clearance (mm)	460	460
H - Width (mm)	2310	2310
M - Cab width (mm)	1010	1010
P - Height (mm)	2530	2530
S - Fork steering range (mm)	4800	4800

MODEL	TF38.10TT-136	TF38.10TCS-136
PERFORMANCE		
Unladen weight (kg)	8200	8500
Maximum load capacity (kg)	3800	3800
Lift height (m)	9.7	9.7
Maximum reach (m)	6.7	6.7
Boom side-shift (mm)	+/- 180	+/- 180
Frame levelling (%)	+/- 8	+/- 8
Boom section	3	3
POWERTRAIN		
Engine	PERKINS 904	PERKINS 904
Range/Cylinders (l)	3.6/4	3.6/4
Engine power (kW/HP)	100 / 136	100 / 136
Anti-pollution technology	Stage V - SCR + DOC + DPF	Stage V - SCR + DOC + DPF
Reversible Fan	●	●
Maximum speed (km/h)	40	40
Fuel tank capacity (l)	140	140
AdBlue tank capacity (l)	16	16
Hydrostatic transmission EPD	●	●
Electronic joystick	●	●
Axles	Drop portal	Drop portal
Brakes	Dry discs	Dry discs
HYDRAULIC		
Delivery / pressure (bar-l/min)	139-250	139-250
Hydraulic oil tank capacity (l)	100	100
CAB		
ASCS	Full	Full
FOPS/ROPS Cab	●	●
Tilting cab	—	—
CONFIGURATION		
Hydropneumatic Suspension CS Merlo	—	●
Hydropneumatic Suspension EAS Merlo	—	—
Permanent four-wheel drive	●	●
Three steering way	●	●
Standard tyres	400/70-24"	400/70-24"
Hydraulically controlled stabilizers	—	—
Turret rotation	—	—
PTO (rpm)	—	—
3-point rear linkage (kg)	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.

Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 24/11/2025 - 13:55

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.