


Medium Capacity Telehandlers

Regulatory area: AU
TF42.7TT

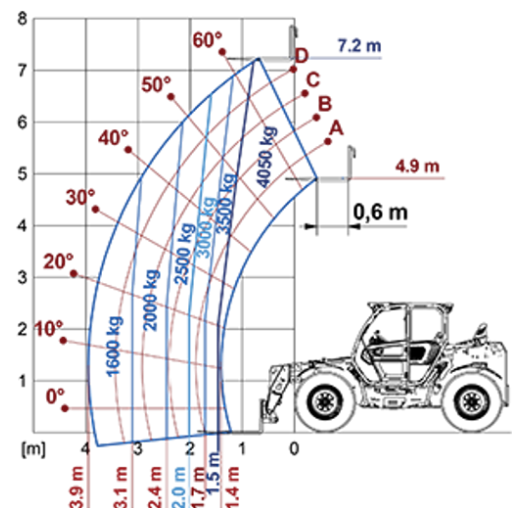

MODEL	TF42.7TT-136	TF42.7TTCS-136	TF42.7TTCS-145-CVT
A - Length (mm)	4730	4730	4730
C - Wheelbase (mm)	2810	2810	2810
F - Ground clearance (mm)	460	460	460
H - Width (mm)	2310	2310	2310
M - Cab width (mm)	1010	1010	1010
P - Height (mm)	2530	2530	2530
S - Fork steering range (mm)	4800	4800	4800

MODEL	TF42.7TT-136	TF42.7TTCs-136	TF42.7TTCs-145-CVT
PERFORMANCE			
Unladen weight (kg)	8000	8200	8200
Maximum load capacity (kg)	4050	4050	4050
Lift height (m)	7.2	7.2	7.2
Maximum reach (m)	3.8	3.8	3.9
Boom side-shift (mm)	+/- 150	+/- 150	+/- 150
Frame levelling (%)	+/- 8	+/- 8	+/- 8
Boom section	2	2	2
POWERTRAIN			
Engine	PERKINS 904	PERKINS 904	DEUTZ TCD3.6
Range/Cylinders (l)	3.6/4	3.6/4	3.6/4
Engine power (kW/HP)	100/136	100/136	105/143
Anti-pollution technology	Stage V - SCR + DOC + DPF	Stage V - SCR + DOC + DPF	Stage V - SCR + DOC + DPF
Reversible Fan	●	●	●
Maximum speed (km/h)	40	40	40
Fuel tank capacity (l)	140	140	140
AdBlue tank capacity (l)	16	16	18
Hydrostatic transmission EPD	●	●	CVTTronic
Electronic joystick	●	●	●
Axles	Drop portal	Drop portal	Drop portal
Brakes	Dry discs	Dry discs	Dry discs
HYDRAULIC			
Delivery / pressure (bar-l/min)	139-250	139-250	150-250
Hydraulic oil tank capacity (l)	100	100	100
CAB			
ASCS	Light	Light	Light
FOPS/ROPS Cab	●	●	●
Tilting cab	—	—	—
CONFIGURATION			
Hydropneumatic Suspension CS Merlo	—	●	●
Hydropneumatic Suspension EAS Merlo	—	—	—
Permanent four-wheel drive	●	●	●
Three steering way	●	●	●
Standard tyres	400/70-24"	400/70-24"	400/70-24"
Hydraulically controlled stabilizers	—	—	—
Turret rotation	—	—	—
PTO (rpm)	—	—	—
3-point rear linkage (kg)	—	—	—

— NOT AVAILABLE
 • ● STANDARD
 • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.
 Via Nazionale, 9
 12010 S. Defendente di Cervasca, (Cuneo) Italia
 Tel. +39 0171 614111
info@merlo.com www.merlo.com
 Release 24/11/2025 - 13:52

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.