


Cingo Multifunction
Regulatory area: AU
M12.3EVO Y

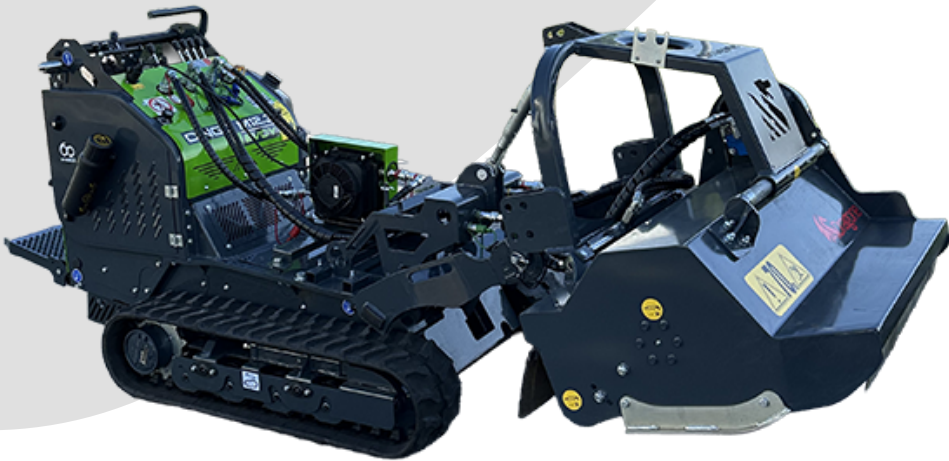

MODEL	M12.3EVOY
Height	1220
Rubber track dimension	230x72x40
Ground clearance	110
Width (mm)	1000
Length (mm)	2170

MODEL	M12.3EVOY
OPERATOR WORKSTATION	
Shock-absorbing Operator Platform	●
Lever controls	●
Engine status display	●
Operator support handle	●
ENGINE	
Electric Starter	●
Battery (Electric only)	—
Inverter (Electric only)	—
Fuel	Diesel
Displacement/Cylinders (l)	1000
Engine	Yanmar Diesel 3TNM74F
Engine Power (hp/kW)	24,2/17,8
Transmission type	Hydrostatic
Track support rollers	4
Gear motors	●
Hydrostatic pump	●
Fuel tank capacity (l)	14
Hydraulic oil tank capacity (l)	26
Anti-pollution technology	Stage V
Cooling system	Liquid
OPTIONS	
Multifunctional accessory with quick-release coupling	●
Jump-start cable	●
Oil cooler	●
Drain line	●
3-point rear linkage	○
Quick boom coupling	●
Stabiliser leg	○
PERFORMANCE	
Dumper capacity (m3)	0,55
Unladen weight (kg)	1200
Maximum cross gradient (%)	20
Maximum longitudinal gradient (%)	35
Maximum load capacity (kg)	1200
Maximum speed (km/h)	5
Implement pump	8+2,5
Implement pump delivery (l/min)	27+8

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



MERLO S.p.A.

Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 28/07/2026 - 11:41

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.