


# Stabilized Telehandlers

Regulatory area: NA  
P40.13

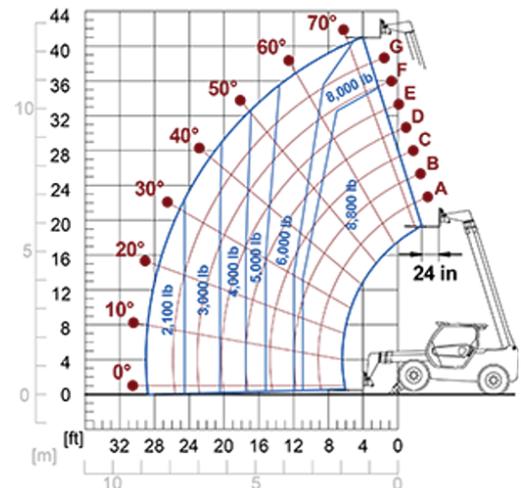

MODEL	P40.13EE4	P40.13PLUS
A - Length (in)	213	213
C - Wheelbase (in)	111	111
F - Ground clearance (in)	15	15
H - Width (in)	88	88
M - Cab width (in)	40	40
P - Height (in)	95	95
S - Fork steering range (in)	194	194

MODEL	P40.13EE4	P40.13PLUS
<b>PERFORMANCE</b>		
Unladen weight (lb)	20503	20503
Maximum load capacity (lb)	8800	8800
Lift height (ft)	41'	41'
Maximum reach (ft)	28'	28'
Boom side-shift (in)	+/- 13.4	+/- 13.4
Frame levelling (%)	+/- 8	+/- 8
Boom section	3	3
<b>POWERTRAIN</b>		
Engine	REHLKO 2504	PERKINS 904
Range/Cylinders (l)	2.5/4	3.6/4
Engine power (kW/HP)	55.4/75.1	85.9/115
Anti-pollution technology	Tier 4 - DOC	Stage V - SCR+DPF+DOC
Reversible Fan	●	●
Maximum speed (mph)	20.5	25
Fuel tank capacity (gal)	37	37
AdBlue tank capacity (gal)	—	4.8
Hydrostatic transmission EPD	●	●
Electronic joystick	STD	STD
Axles	Drop portal	Drop portal
Brakes	Dry discs	Dry discs
<b>HYDRAULIC</b>		
Delivery / pressure (gal/min-psi)	27.5 - 3626	27.5 - 3626
Hydraulic oil tank capacity (gal)	26.4	26.4
<b>CAB</b>		
ASCS	Light	Full
FOPS/ROPS Cab	●	●
Tilting cab	—	—
<b>CONFIGURATION</b>		
Hydropneumatic Suspension CS Merlo	—	—
Frame suspension	—	—
Permanent four-wheel drive	●	●
Three steering way	●	●
Standard tyres	400/70-20"	400/70-20"
Hydraulically controlled stabilizers	Narrow	Narrow
Turret rotation	—	—
PTO (rpm)	—	—
3-point rear linkage (lb)	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



**MERLO S.P.A.**

Via Nazionale, 9  
12010 S. Defendente di Cervasca, (Cuneo) Italia  
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 19/02/2026 - B:26

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.