

Compact Telehandlers


Regulatory area: AU

TF27.6

MERLO



MODEL	TF27.6
A - Length (mm)	3910
C - Wheelbase (mm)	2450
F - Ground clearance (mm)	330
H - Width (mm)	1860
M - Cab width (mm)	1010
P - Height (mm)	2020
S - Fork steering range (mm)	4200

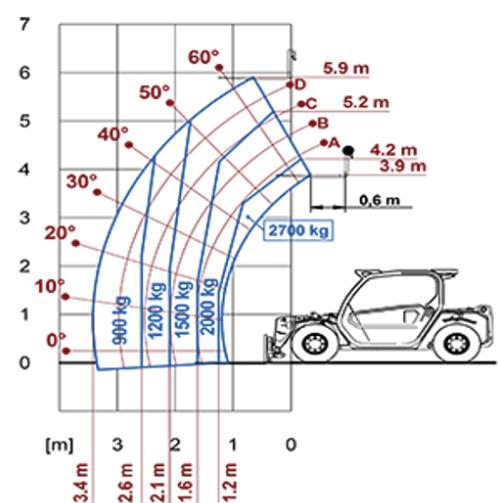

MODEL	TF27.6
PERFORMANCE	
Unladen weight (kg)	4850
Maximum load capacity (kg)	2700
Lift height (m)	5.9
Maximum reach (m)	3.3
Boom side-shift (mm)	—
Frame levelling (%)	—
Boom section	2
POWERTRAIN	
Engine	KOHLER 2504
Range/Cylinders (l)	2.5/4
Engine power (kW/HP)	55.4/75.1
Anti-pollution technology	Stage V - DOC + DPF
Reversible Fan	—
Maximum speed (km/h)	40
Fuel tank capacity (l)	70
AdBlue tank capacity (l)	—
Hydrostatic transmission EPD	TOP - 1V
Electronic joystick	—
Axles	Axial
Brakes	Dry discs
HYDRAULIC	
Delivery / pressure (bar-l/min)	95-210
Hydraulic oil tank capacity (l)	70
CAB	
ASCS	Light
FOPS/ROPS Cab	●
Tilting cab	—
CONFIGURATION	
Hydropneumatic Suspension CS Merlo	—
Hydropneumatic Suspension EAS Merlo	—
Permanent four-wheel drive	●
Three steering way	●
Standard tyres	12/75-18 12 PR
Hydraulically controlled stabilizers	—
Turret rotation	—
PTO (rpm)	—
3-point rear linkage (kg)	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.

Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 24/11/2025 - 8:44

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.