


Compact Telehandlers

Regulatory area: NA

P27.6

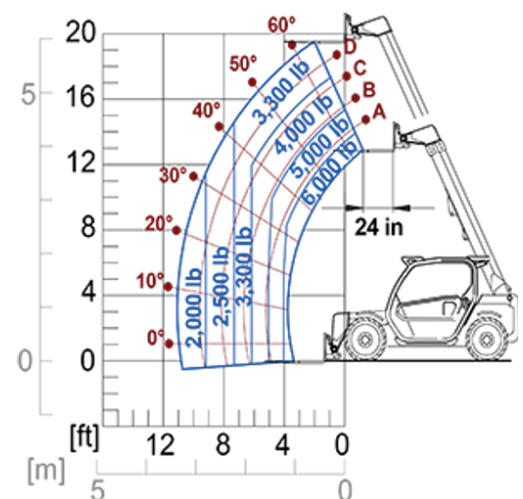

MODEL	P27.6EE4PLUS	P27.6EE4TOP
A - Length (in)	154	154
C - Wheelbase (in)	96	96
F - Ground clearance (in)	11	11
H - Width (in)	73	73
M - Cab width (in)	40	40
P - Height (in)	77	77
S - Fork steering range (in)	165	165

MODEL	P27.6EE4PLUS	P27.6EE4TOP
PERFORMANCE		
Unladen weight (lb)	10692	10692
Maximum load capacity (lb)	6000	6000
Lift height (ft)	19'	19'
Maximum reach (ft)	10'	10'
Boom side-shift (in)	—	—
Frame levelling (%)	—	—
Boom section	2	2
POWERTRAIN		
Engine	REHLKO 2504	REHLKO 2504
Range/Cylinders (l)	2.5/4	2.5/4
Engine power (kW/HP)	55.4/75.1	55.4/75.1
Anti-pollution technology	Tier 4 - DOC	Tier 4 - DOC
Reversible Fan	—	—
Maximum speed (mph)	25	25
Fuel tank capacity (gal)	18.5	18.5
AdBlue tank capacity (gal)		
Hydrostatic transmission EPD	●	TOP - 1V
Electronic joystick	—	—
Axles	Axial	Axial
Brakes	Dry discs	Dry discs
HYDRAULIC		
Delivery / pressure (gal/min-psi)	25.1 - 3046	25.1 - 3046
Hydraulic oil tank capacity (gal)	18.5	18.5
CAB		
ASCS	—	—
FOPS/ROPS Cab	●	●
Tilting cab	—	—
CONFIGURATION		
Hydropneumatic Suspension CS Merlo	—	—
Frame suspension	—	—
Permanent four-wheel drive	●	●
Three steering way	●	●
Standard tyres	12-16.5"	12-16.5"
Hydraulically controlled stabilizers	—	—
Turret rotation	—	—
PTO (rpm)	—	—
3-point rear linkage (lb)	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.

Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 19/02/2026 - 8:18

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.