
# Compact Telehandlers

## Regulatory area: NA

## P27.6



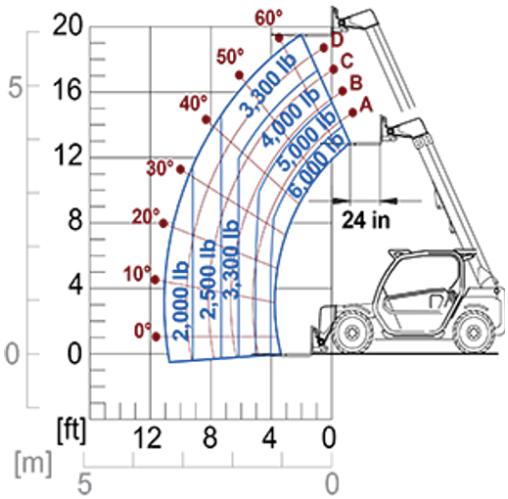


| MODEL | P27.6EE4PLUS | P27.6EE4TOP |
|---|---|---|
| Length (in) | 154 | 154 |
| Wheelbase (in) | 96 | 96 |
| Ground clearance (in) | 13 | 13 |
| Width (in) | 73 | 73 |
| Cab width (in) | 40 | 40 |
| Height (in) | 80 | 80 |
| Fork steering range (in) | 165 | 165 |

| MODEL | P27.6EE4PLUS | P27.6EE4TOP |
|---|---|---|
| **PERFORMANCE** | | |
| Unladen weight (lb) | 10700 | 10700 |
| Maximum load capacity (lb) | 6000 | 6000 |
| Lift height (ft) | 19' 4" | 19' 4" |
| Maximum reach (ft) | 10' 10" | 10' 10" |
| Boom side-shift (in) | — | — |
| Frame levelling (%) | — | — |
| Boom section | 2 | 2 |
| **POWERTRAIN** | | |
| Engine | REHLKO 2504 | REHLKO 2504 |
| Range/Cylinders (l) | 2.5/4 | 2.5/4 |
| Engine power (kW/HP) | 55.4/74 | 55.4/74 |
| Anti-pollution technology | Tier 4 - DOC | Tier 4 - DOC |
| Reversible Fan | — | — |
| Maximum speed (mph) | 25 | 25 |
| Fuel tank capacity (gal) | 18.3 | 18.3 |
| AdBlue tank capacity (gal) | — | — |
| Hydrostatic transmission EPD | ● | TOP - 1V |
| Electronic joystick | ○ | ○ |
| Axles | Axial | Axial |
| Brakes | Dry discs | Dry discs |
| **HYDRAULIC** | | |
| Delivery / pressure (gal/min-psi) | 25.1-3046 | 25.1-3046 |
| Hydraulic oil tank capacity (gal) | 18,5 | 18,5 |
| **CAB** | | |
| ASCS | — | — |
| FOPS/ROPS Cab | ● | ● |
| Tilting cab | — | — |
| **CONFIGURATION** | | |
| Hydropneumatic Suspension CS Merlo | — | — |
| Frame suspension | — | — |
| Permanent four-wheel drive | ● | ● |
| Three steering way | ● | ● |
| Standard tyres | 12-16.5" | 12-16.5" |
| Hydraulically controlled stabilizers | — | — |
| Turret rotation | — | — |
| PTO (rpm) | — | — |
| 3-point rear linkage (lb) | — | — |

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

**Your Merlo dealer**

**MERLO S.P.A.**
Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111
info@merlo.com www.merlo.com

Release 6/08/2026 - 7:5

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.