


Medium Capacity Telehandlers

Regulatory area: EU
TF35.7

MERLO

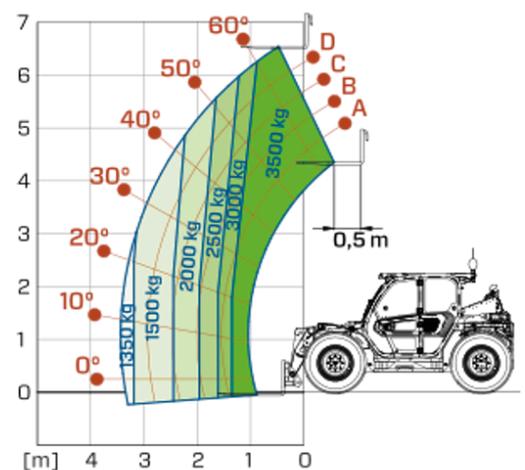

MODEL	TF35.7-140	TF35.7CS-140
A - Length (mm)	4310	4310
C - Wheelbase (mm)	2740	2740
F - Ground clearance (mm)	380	380
H - Width (mm)	2250	2250
M - Cab width (mm)	1010	1010
P - Height (mm)	2240	2300
S - Fork steering range (mm)	4740	4740

MODEL	TF35.7-140	TF35.7CS-140
PERFORMANCE		
Unladen weight (kg)	6800	6950
Maximum load capacity (kg)	3500	3500
Lift height (m)	6.6	6.6
Maximum reach (m)	3.5	3.5
Boom side-shift (mm)	—	—
Frame levelling (%)	—	—
Boom section	2	2
POWERTRAIN		
Engine	DEUTZ TCD3.6	DEUTZ TCD3.6
Range/Cylinders (l)	3.6/4	3.6/4
Engine power (kW/HP)	100/136	100/136
Anti-pollution technology	Stage V - SCR + DOC + DPF	Stage V - SCR + DOC + DPF
Reversible Fan	●	●
Maximum speed (km/h)	40	40
Fuel tank capacity (l)	85	85
AdBlue tank capacity (l)	12	12
Hydrostatic transmission EPD	●	●
Electronic joystick	●	●
Axles	Axial	Axial
Brakes	Dry discs	Dry discs
HYDRAULIC		
Delivery / pressure (bar-l/min)	125-210	125-210
Hydraulic oil tank capacity (l)	85	85
CAB		
ASCS	Light	Light
FOPS/ROPS Cab	●	●
Tilting cab	—	—
CONFIGURATION		
Hydropneumatic Suspension CS Merlo	—	●
Frame suspension	—	—
Permanent four-wheel drive	●	●
Three steering way	●	●
Standard tyres	400/70-24"	400/70-24"
Hydraulically controlled stabilizers	—	—
Turret rotation	—	—
PTO (rpm)	—	—
3-point rear linkage (kg)	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.

Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 24/02/2026 - 16:23

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.