


Electric Telehandlers

Regulatory area: AU

EW25.5

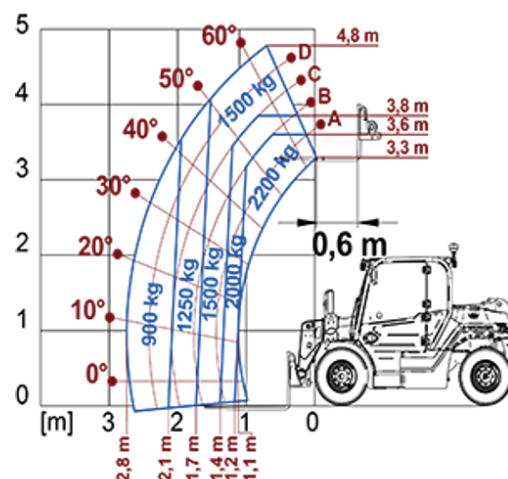

MODEL	EW25.5-60_AU	EW25.5-90_AU
A - Length (mm)	3320	3320
C - Wheelbase (mm)	2100	2100
F - Ground clearance (mm)	230	230
H - Width (mm)	1540	1540
M - Cab width (mm)	770	770
P - Height (mm)	1975	1975
S - Fork steering range (mm)	2230	2700

MODEL	EW25.5-60_AU	EW25.5-90_AU
PERFORMANCE		
Unladen weight (kg)	4950	4950
Maximum load capacity (kg)	2200	2200
Lift height (m)	4.8	4.8
Maximum reach (m)	2.6	2.6
Boom section	2	2
POWERTRAIN		
Engine	2 Electric	3 Electric
Battery (type and V)	Lead acid - 48 V	Lead acid - 48 V
Nominal capacity	960 Ah	960 Ah
Engine power (kW/HP)	44/60	60/90
Maximum speed (km/h)	25	25
Traction	2WD, 3 traction mode	4WD, 3 traction mode
Autonomy (hours)	8h	8h
Recharge time	9h (220V)	9h (220V)
Recharge voltage	220V/400V	220V/400V
Battery charger	●	●
Lithium battery	○	○
HYDRAULIC		
Hydraulic pump	G + FS	G + FS
Delivery / pressure (L / MIN - BAR)	42 - 210	42 - 210
CAB		
Closed cab	○	○
FOPS LIV I and ROPS	●	●
Controls	Electronic joystick control	Electronic joystick control
Reverse shuttle	Dual Reverse	Dual Reverse
CONFIGURATION		
Battery fast replacement	●	●
Work lights on cab (LED)	●	●
Rotating beacon and blue reverse light	●	●
Two steering wheels	Rear	Rear
Front standard tyres	10/75-15.3"	10/75-15.3"
Rear standard tyres	7.5-15"	7.5-15"
E-holder brakes	●	●
Regenerative braking	●	●
Automatic parking brake	●	●

— NOT AVAILABLE
 • ● STANDARD
 • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.
 Via Nazionale, 9
 12010 S. Defendente di Cervasca, (Cuneo) Italia
 Tel. +39 0171 614111
info@merlo.com www.merlo.com
 Release 3/12/2025 - 8:43

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.