


Compact Telehandlers

Regulatory area: AU

TF33.7

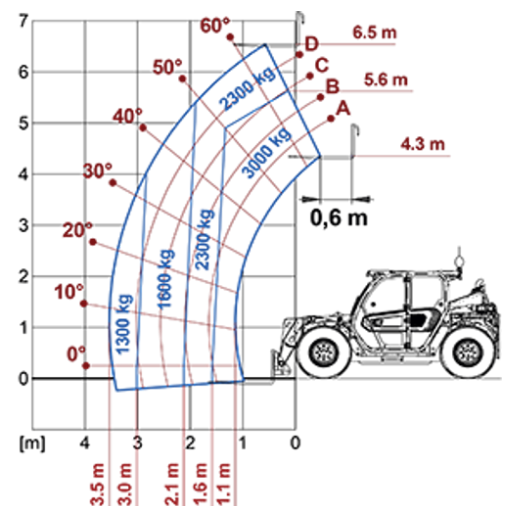


MODEL	TF33.7-115EE	TF33.7-115LEE
A - Length (mm)	4310	4310
C - Wheelbase (mm)	2740	2740
F - Ground clearance (mm)	290	290
H - Width (mm)	2100	2100
M - Cab width (mm)	1010	1010
P - Height (mm)	2120	2020
S - Fork steering range (mm)	4660	4660

MODEL	TF33.7-115EE	TF33.7-115LEE
PERFORMANCE		
Unladen weight (kg)	6600	6600
Maximum load capacity (kg)	3000	3000
Lift height (m)	6.5	6.5
Maximum reach (m)	3.5	3.5
Boom side-shift (mm)	—	—
Frame levelling (%)	—	—
Boom section	2	2
POWERTRAIN		
Engine	DEUTZ TCD 3.6	DEUTZ TCD 3.6
Range/Cylinders (l)	3.6/4	3.6/4
Engine power (kW/HP)	85/115	85/115
Anti-pollution technology	Tier 3	Tier 3
Reversible Fan	●	●
Maximum speed (km/h)	40	40
Fuel tank capacity (l)	85	85
AdBlue tank capacity (l)	—	—
Hydrostatic transmission EPD	●	●
Electronic joystick	●	●
Axles	Axial	Axial
Brakes	Dry discs	Dry discs
HYDRAULIC		
Delivery / pressure (bar-l/min)	125-210	125-210
Hydraulic oil tank capacity (l)	85	85
CAB		
ASCS	Full	Full
FOPS/ROPS Cab	●	●
Tilting cab	—	—
CONFIGURATION		
Hydropneumatic Suspension CS Merlo	—	—
Hydropneumatic Suspension EAS Merlo	—	—
Permanent four-wheel drive	●	●
Three steering way	●	●
Standard tyres	400/70-20"	400/70-20"
Hydraulically controlled stabilizers	—	—
Turret rotation	—	—
PTO (rpm)	—	—
3-point rear linkage (kg)	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.

Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 24/11/2025 - 8:46

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.