


Compact Telehandlers

Regulatory area: EU
P27.6

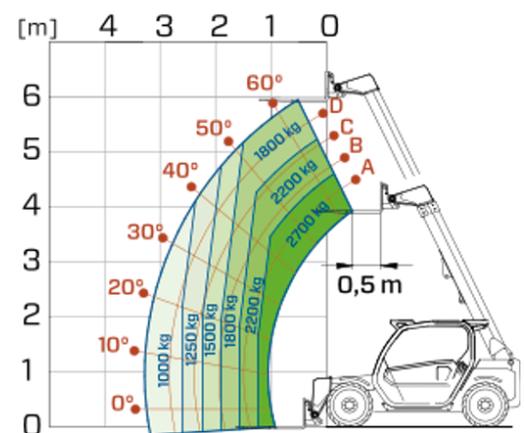

MODEL	P27.6TOP	P27.6PLUS
A - Length (mm)	3910	3910
C - Wheelbase (mm)	2450	2450
F - Ground clearance (mm)	270	270
H - Width (mm)	1860	1860
M - Cab width (mm)	1010	1010
P - Height (mm)	1960	1960
S - Fork steering range (mm)	4200	4200

MODEL	P27.6TOP	P27.6PLUS
PERFORMANCE		
Unladen weight (kg)	4850	4850
Maximum load capacity (kg)	2700	2700
Lift height (m)	5.9	5.9
Maximum reach (m)	3.3	3.3
Boom side-shift (mm)	—	—
Frame levelling (%)	—	—
Boom section	2	2
POWERTRAIN		
Engine	REHLKO 2504	REHLKO 2504
Range/Cylinders (l)	2.5/4	2.5/4
Engine power (kW/HP)	55.4/75.1	55.4/75.1
Anti-pollution technology	Stage V - DOC + DPF	Stage V - DOC + DPF
Reversible Fan	—	—
Maximum speed (km/h)	40	40
Fuel tank capacity (l)	70	70
AdBlue tank capacity (l)	—	—
Hydrostatic transmission EPD	TOP - 1V	●
Electronic joystick	—	—
Axles	Axial	Axial
Brakes	Dry discs	Dry discs
HYDRAULIC		
Delivery / pressure (bar-l/min)	95-210	95-210
Hydraulic oil tank capacity (l)	70	70
CAB		
ASCS	—	—
FOPS/ROPS Cab	●	●
Tilting cab	—	—
CONFIGURATION		
Hydropneumatic Suspension CS Merlo	—	—
Frame suspension	—	—
Permanent four-wheel drive	●	●
Three steering way	●	●
Standard tyres	12-16.5"	12-16.5"
Hydraulically controlled stabilizers	—	—
Turret rotation	—	—
PTO (rpm)	—	—
3-point rear linkage (kg)	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.

Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 24/02/2026 - 16:18

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.