


Compact Telehandlers

Regulatory area: EU

TF30.9

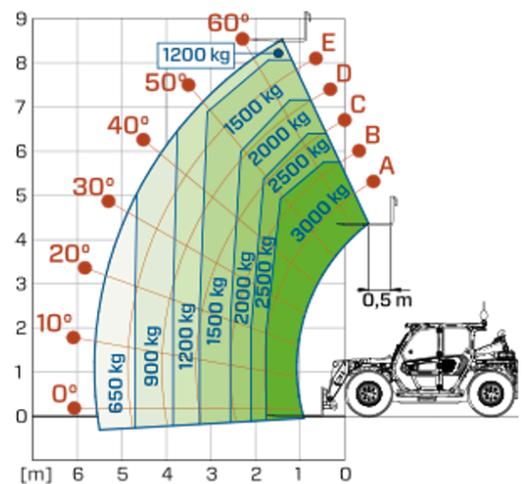

MODEL	TF30.9-G	TF30.9-LG	TF30.9-115	TF30.9-115L
A - Length (mm)	4330	4330	4330	4330
C - Wheelbase (mm)	2740	2740	2740	2740
F - Ground clearance (mm)	290	290	290	290
H - Width (mm)	2100	2100	2100	2100
M - Cab width (mm)	1010	1010	1010	1010
P - Height (mm)	2120	2020	2120	2020
S - Fork steering range (mm)	4660	4660	4660	4660

MODEL	TF30.9-G	TF30.9-LG	TF30.9-115	TF30.9-115L
PERFORMANCE				
Unladen weight (kg)	7100	7100	7200	7200
Maximum load capacity (kg)	3000	3000	3000	3000
Lift height (m)	8.6	8.6	8.6	8.6
Maximum reach (m)	5.7	5.7	5.7	5.7
Boom side-shift (mm)	—	—	—	—
Frame levelling (%)	—	—	—	—
Boom section	3	3	3	3
POWERTRAIN				
Engine	REHLKO 2504	REHLKO 2504	DEUTZ TCD3.6	DEUTZ TCD3.6
Range/Cylinders (l)	2.5/4	2.5/4	3.6/4	3.6/4
Engine power (kW/HP)	55.4/75.1	55.4/75.1	85/115	85/115
Anti-pollution technology	Stage V - DOC + DPF	Stage V - DOC + DPF	Stage V - SCR + DOC + DPF	Stage V - SCR + DOC + DPF
Reversible Fan	●	●	●	●
Maximum speed (km/h)	40	40	40	40
Fuel tank capacity (l)	85	85	85	85
AdBlue tank capacity (l)	—	—	12	12
Hydrostatic transmission EPD	●	●	●	●
Electronic joystick	—	—	●	●
Axles	Axial	Axial	Axial	Axial
Brakes	Dry discs	Dry discs	Dry discs	Dry discs
HYDRAULIC				
Delivery / pressure (bar-l/min)	98-210	98-210	125-210	125-210
Hydraulic oil tank capacity (l)	85	85	85	85
CAB				
ASCS	—	—	Light	Light
FOPS/ROPS Cab	●	●	●	●
Tilting cab	—	—	—	—
CONFIGURATION				
Hydropneumatic Suspension CS Merlo	—	—	—	—
Frame suspension	—	—	—	—
Permanent four-wheel drive	●	●	●	●
Three steering way	●	●	●	●
Standard tyres	400/70-20"	400/70-20"	400/70-20"	400/70-20"
Hydraulically controlled stabilizers	—	—	—	—
Turret rotation	—	—	—	—
PTO (rpm)	—	—	—	—
3-point rear linkage (kg)	—	—	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



MERLO S.P.A.

Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 24/02/2026 - 16:20

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.