


# Compact Telehandlers

Regulatory area: EE

P27.6

**MERLO**

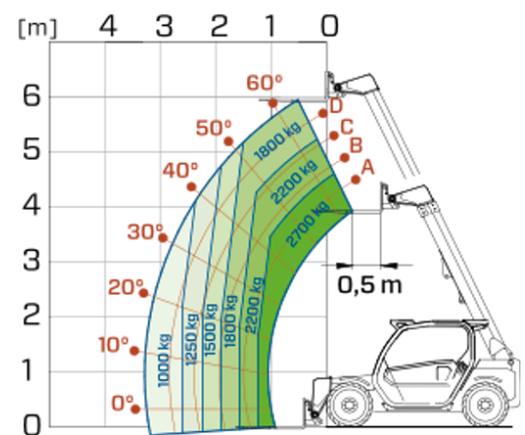

MODEL	P27.6EE4PLUS	P27.6EE4TOP
A - Length (mm)	3910	3910
C - Wheelbase (mm)	2450	2450
F - Ground clearance (mm)	270	270
H - Width (mm)	1860	1860
M - Cab width (mm)	1010	1010
P - Height (mm)	1960	1960
S - Fork steering range (mm)	4200	4200

MODEL	P27.6EE4PLUS	P27.6EE4TOP
<b>PERFORMANCE</b>		
Unladen weight (kg)	4850	4850
Maximum load capacity (kg)	2700	2700
Lift height (m)	5.9	5.9
Maximum reach (m)	3.3	3.3
Boom side-shift (mm)	—	—
Frame levelling (%)	—	—
Boom section	2	2
<b>POWERTRAIN</b>		
Engine	REHLKO 2504	REHLKO 2504
Range/Cylinders (l)	2.5/4	2.5/4
Engine power (kW/HP)	55.4/75.1	55.4/75.1
Anti-pollution technology	Tier 4 - DOC	Tier 4 - DOC
Reversible Fan	—	—
Maximum speed (km/h)	40	40
Fuel tank capacity (l)	70	70
AdBlue tank capacity (l)	—	—
Hydrostatic transmission EPD	●	TOP - 1V
Electronic joystick	—	—
Axles	Axial	Axial
Brakes	Dry discs	Dry discs
<b>HYDRAULIC</b>		
Delivery / pressure (bar-l/min)	95-210	95-210
Hydraulic oil tank capacity (l)	70	70
<b>CAB</b>		
ASCS	—	—
FOPS/ROPS Cab	●	●
Tilting cab	—	—
<b>CONFIGURATION</b>		
Hydropneumatic Suspension CS Merlo	—	—
Frame suspension	—	—
Permanent four-wheel drive	●	●
Three steering way	●	●
Standard tyres	12-16.5"	12-16.5"
Hydraulically controlled stabilizers	—	—
Turret rotation	—	—
PTO (rpm)	—	—
3-point rear linkage (kg)	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



**MERLO S.P.A.**

Via Nazionale, 9  
12010 S. Defendente di Cervasca, (Cuneo) Italia  
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 3/03/2026 - 16:21

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.