


# Stabilized Telehandlers

Regulatory area: EU  
P30.10

**MERLO**

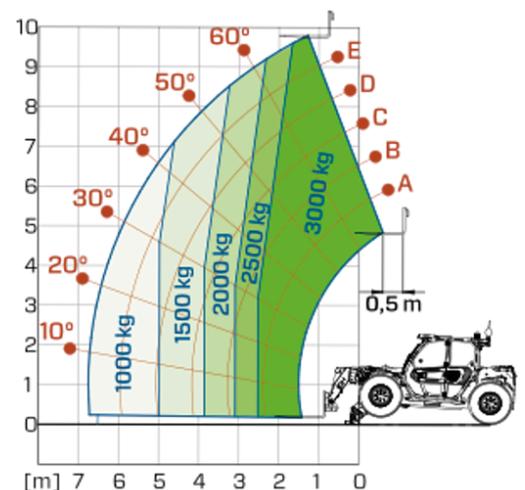

MODEL	P30.10	P30.10L
A - Length (mm)	4700	4700
C - Wheelbase (mm)	2740	2740
F - Ground clearance (mm)	290	290
H - Width (mm)	2100	2100
M - Cab width (mm)	1010	1010
P - Height (mm)	2120	2020
S - Fork steering range (mm)	5050	5050

MODEL	P30.10	P30.10L
<b>PERFORMANCE</b>		
Unladen weight (kg)	7600	7600
Maximum load capacity (kg)	3000	3000
Lift height (m)	9.8	9.8
Maximum reach (m)	6.7	6.7
Boom side-shift (mm)	—	—
Frame levelling (%)	—	—
Boom section	3	3
<b>POWERTRAIN</b>		
Engine	REHLKO 2504	REHLKO 2504
Range/Cylinders (l)	2.5/4	2.5/4
Engine power (kW/HP)	55.4/75.1	55.4/75.1
Anti-pollution technology	Stage V - DOC + DPF	Stage V - DOC + DPF
Reversible Fan	●	●
Maximum speed (km/h)	40	40
Fuel tank capacity (l)	80	80
AdBlue tank capacity (l)	—	—
Hydrostatic transmission EPD	●	●
Electronic joystick	●	●
Axles	Axial	Axial
Brakes	Dry discs	Dry discs
<b>HYDRAULIC</b>		
Delivery / pressure (bar-l/min)	117-210	117-210
Hydraulic oil tank capacity (l)	85	85
<b>CAB</b>		
ASCS	Light	Light
FOPS/ROPS Cab	●	●
Tilting cab	—	—
<b>CONFIGURATION</b>		
Hydropneumatic Suspension CS Merlo	—	—
Frame suspension	—	—
Permanent four-wheel drive	●	●
Three steering way	●	●
Standard tyres	400/70-20"	400/70-20"
Hydraulically controlled stabilizers	Narrow	Narrow
Turret rotation	—	—
PTO (rpm)	—	—
3-point rear linkage (kg)	—	—

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer



**MERLO S.P.A.**

Via Nazionale, 9  
12010 S. Defendente di Cervasca, (Cuneo) Italia  
Tel. +39 0171 614111

info@merlo.com www.merlo.com

Release 24/03/2026 - 9:19

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.