

A CONTRACTOR OF A CONTRACTOR O

**Aotorcycl** 

oerato

anua



Revised June 2014 STRANDED MOTORISTS NEED HELP? CALL 1-800-525-5555

## PREFACE

This Motorcycle Operator's Manual has been prepared in cooperation with the Motorcycle Safety Foundation. Within these pages are numerous instructions, suggestions, and tips that, if followed, will prepare anyone for a lifetime of enjoyable motorcycling.

In recent years motorcycle safety has received a great deal of attention. This is the result of many serious injuries and deaths of motorcyclists in motor vehicle traffic accidents. This handbook was prepared to assist the beginning motorcyclist in passing the required written examination. In addition, this manual serves to refresh and therefore, improve the experienced rider.

Although comprehensive, this handbook does not include all laws regulating traffic on the streets and highways. The Department of Public Safety strongly recommends reviewing the references to the motor vehicle statutes and local ordinances in order to gain a better knowledge of motor vehicle laws.

NOTICE: The Texas Department of Public Safety does not discriminate because of race, color, religion, sex, national origin, age, or disability. Persons needing accommodation under the provisions of the Americans With Disabilities Act (ADA) should contact their local Driver License Office. ADA Grievance Procedures are published in the Texas Administrative Code, Title 37, Section 1.41.

# A MESSAGE FROM THE DIRECTOR OF THE TEXAS DEPARTMENT OF PUBLIC SAFETY

Motorcycling is an enjoyable driving experience. Although motorcycling may look easy, in reality, it is quite challenging and requires special attention, knowledge, and skills beyond those required to drive a car. Too often motorcyclists suffer severe injury or even death as a result of a crash that could have been avoided.

Primarily designed for new riders, I highly encourage you to read and study this information in preparation for your licensing examination to better protect you from serious injury. I believe that you will be a safer motorcyclist if you follow the guidance and suggestions outlined in this document.

While the handbook is geared toward the beginner motorcyclist, experienced riders will also benefit from a review of this document.

Establishing safe riding habits early in your motorcycling career will undoubtedly, yield years of enjoyment.

Steven CMC Crow

Steven C. McCraw, Director Department of Public Safety

## CONTENTS

THE	RIDER AND	
THE	MOTORCYCLE.	1

DISABLED PARKING......6

#### PREPARING TO RIDE

Wear the Right Gear7
Know Your Motorcycle9
Know Your Responsibilities12

#### **RIDE WITHIN YOUR ABILITIES**

Basic Vehicle Control		
Keeping Your Distance	17	
SEE	22	
Intersections	23	
Increasing Conspicuity	26	
Crash Avoidance	29	
Handling Dangerous Surfaces	32	
Mechanical Problems	35	
Animals	36	
Flying Objects	37	
Getting Off the Road	37	
Carrying Passengers		
and Cargo	37	
Group Riding	40	

#### **BEING IN SHAPE TO RIDE**

Why This Information Is Important4	4
Alcohol and Drugs in Motorcycle Operation4	4
Alcohol in the Body4	4
Alcohol and the Law4	6
Minimize the Risks4	7
Step in to Protect Friends4	7
Fatigue4	8

### EARNING YOUR LICENSE ......49


#### THREE-WHEEL SUPPLEMENT

51
51
3
6
5

#### T-CLOCS PRE-RIDE CHECKLIST...57

#### FREQUENTLY ASKED QUESTIONS ......60

## THE RIDER AND THE MOTORCYCLE

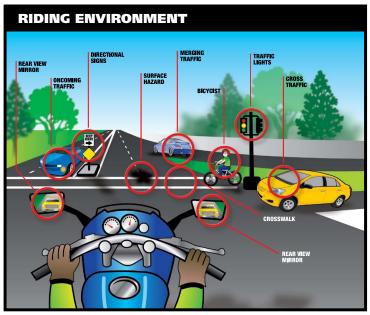

Motorcycling is a unique experience. Compared to a car, you do not sit in a motorcycle, you become part of it. Not as a passive driver, but as an active rider arcing into a string of smooth corners, playing along with the rhythm of the road; shifting, accelerating, and braking with precision. Whether you ride to and from work or prefer the camaraderie of a group ride on the weekend, motorcycling engages all your senses and creates an invigorating sense of freedom.

Along with that freedom comes responsibility. All states require some form of license endorsement demonstrating you possess a minimum level of skill and knowledge. This booklet and other motorcycle publications can help prepare you to be successful. You might also consider taking a formal hands-on training course, even if your state doesn't require that you complete one. You will learn how to improve your riding skills and mental strategies, so you can be a safer, more alert rider. The diagram above illustrates the complex environment that awaits you, and supports the concept that, as the Motorcycle Safety Foundation says, "Safe riding is as much a skill of the eyes and mind as it is of the hands and feet."

Successfully piloting a motorcycle is a much more involved task than driving a car. Motorcycling requires a fine sense of balance and a heightened sense of awareness and position amidst other roadway users. A motorcycle responds more quickly to rider inputs than a car, but is also more sensitive to outside forces, like irregular road surfaces or crosswinds. A motorcycle is also less visible than a car due to its narrower profile, and offers far less protection by exposing its rider to other traffic and the elements. All these risks can be managed through study, training, and practice.

## **RIDING TEXAS HIGHWAYS**

Motorcycling is very popular in Texas. Before you take the road test it is critical that you know the Texas laws governing motorcycles, and the common sense safety rules.

If you have ever ridden a motorcycle, you may know that a motorcycle only looks easy to ride. Motorcycles are different from other vehicles—only two wheels place more demand on the operator for balance and coordination. The motorcycle's smaller size makes it harder for others to see it in traffic and the rider more vulnerable to injury in a crash. Riding a motorcycle requires special skills and knowledge beyond those required for driving a car.

**On today's highways**, there are large numbers of motorcycle riders and an even larger number of automobile drivers who do not understand how to safely mix in traffic. This lack of knowledge has resulted in an increase in motorcycle-related crashes. The key to safety is understanding and learning how to share the roadway.

Knowing all you can about the motorcycle you ride, or intend to ride, is good preparation for safe and enjoyable riding. Learning to ride off the street in "The Course for Motorcycle Riders" is good insurance. When you take to the road, you will be able to concentrate on the traffic because control of the motorcycle becomes second nature with the proper instruction.

There are plenty of things on the highway that can cause you trouble. Your motorcycle should not be one of them. Three ways to be sure your motorcycle won't let you down are:

- Make sure you start with the right equipment.
- Maintain your motorcycle and keep it in safe riding condition.
- Avoid add-ons and modifications that make your motorcycle harder to handle.

## EQUIPMENT

Texas law requires the following equipment on **motorcycles and motor-driven cycles:** 

- Horn
- Mirror
- Steering
- Brakes
- Tires
- Wheel Assembly
- Exhaust System
- Tail Lamp (1)
- Stop Lamp (1)
- License Plate Lamp
- Rear Red Reflector
- Head Lamp (1)
- Motorcycle, Serial, or Vehicle Identification

Texas law requires the following equipment on **mopeds**:

- Brake
- Head Lamp
- Reflector
- Rear Lamp

These are just minimum requirements. To survive in traffic, you should have a mirror on each side. It is also a good idea to have additional reflectors on the motorcycle. Motorcycles manufactured after 1975 must be ridden with the headlight on.

Helmet and Passengers – Helmets meeting Federal Motor Vehicle Safety Standard #218 (FMVSS-218) are required for motorcycle operators and passengers. This requirement applies to all motorcycles and mopeds regardless of size or number of wheels.

Persons 21 years or older are exempt from wearing a helmet if they have completed a Department-approved Motorcycle Operator Training Course or they are covered with medical insurance. (Proof of medical insurance must be a card or certificate that contains the name of the insurer, the insurance policy number, and the policy period).

An operator who uses someone else's motorcycle to take the road test portion of the driver license examination must wear a helmet unless he or she is 21 years or older and meets the course or insurance requirements described above.

Helmets should:

- Fit snugly
- Be securely fastened when riding
- Be free of defects such as cracks, loose padding, frayed straps, or exposed metal.

A motorcycle operator cannot carry a passenger unless the motorcycle is equipped with a permanent passenger seat, footrests and handholds.

## LICENSING AND OPERATION

Texas law requires all applicants pass a Department-approved motorcycle operator training course before applying for licensing. All applicants must also pass a written test which includes both two and three-wheel motorcycle information from this manual. Out-of-State applicants who hold a motorcycle license are not required to show proof of course completion.

The operator of a motorcycle on a public highway must hold a valid motorcycle license (class M driver license). This requirement also applies to operators of motor driven cycles and mopeds.

In 2013, the Governor signed into law Senate Bill 763, referenced in Transportation Code, Section 521.148, that now requires persons who complete a motorcycle course for three-wheel motorcycles be restricted to the operation of only three-wheel motorcycles. At the time of this publication, DPS had not yet implemented this change. Please note that this change may be implemented before the next revision of the handbook.

### Adult Motorcycle Operator Licensing

To receive a license to operate a motorcycle, adult applicants must pass a course, a written test covering traffic laws pertaining to motorcycles and a road test. The road test may be waived.

Adults 18 through 24 who do not hold a current driver license of any class must successfully complete an Adult Driver Education course.

### Road Test and Waiver Information

In order to take a road test, applicants must have their own motorcycle and provide a passenger vehicle and a licensed driver to drive the examiner during the road test. The vehicle owners must show proof of liability insurance for both vehicles and must pass an on-site vehicle assessment. This test will be similar to the passenger car test and will include scoring on four basic skills.

## **RIDING TEXAS HIGHWAYS**

- Control Your ability to make your motorcycle do what you want it to do.
- Observation Your ability to see what other traffic is doing and other things which may create problems in traffic.
- 3. Positioning Your ability to drive in your lane.
- 4. Signaling Your ability to use turn signals is required.

You may also be graded on your performance on the following skills

- a. Traffic signs
- b. Traffic signals
- c. Intersection observance Use the proper lane; slow down and look both ways before entering the intersection.
- d. Turns
- e. Right-of-way
- f. Following, passing, proper lane position and observance

<u>Note</u>: Texas law requires that the approach for a right turn and the right turn shall be made as close as practicable to the right-hand curb or edge of the roadway. This does not conflict with the material presented elsewhere in this manual. A motorcycle positioned to the right of center of its lane is complying with the law while still protecting its lane position. For more information, refer to page 50

An applicant, 18 years or older, who has passed a Department of Public Safety approved Motorcycle Operator Training Course, and has an unrestricted (not a learner license) Class A, B, or C license, may present the MSB-8 completion certificate or a completion card from a course that meets Motorcycle Safety Foundation curriculum standards and have the road test waived.

#### Requirements for Licensing Minors

Minors, ages 15 through 17 must pass a Motorcycle Operator Training Course approved by the Department of Public Safety before applying for a motorcycle license.

Before taking the course, minors must have successfully completed the entire classroom phase of a driver education course and should obtain a Class C learner license or unrestricted Class C license. A minor must present the MSB-8 before testing for a motorcycle license.

Minors 15 through 17 are NOT eligible for a road test waiver. Minors under the age of 16 can only be licensed to ride a motorcycle with no more than 250cc piston displacement. This restriction is indicated by the restriction code "I" on the driver license. After the person reaches the age of 16, the 250cc restriction may be removed.

### Mopeds

The operator of a moped must hold a valid license as a moped operator (Class M driver license with a restriction code of "K"). A moped is defined as a motor-driven cycle that cannot exceed 30 mph, does not have an engine larger than 50cc, and does not have manual gear shifting. Applicants for a moped operator's license must be at least 15 years old. The licensing requirements involve a course and written examination on traffic laws that apply to the operation of mopeds. No road test is required to operate a moped.

### Registration

Every owner of a motor vehicle, including motorcycles, and mopeds that will be ridden on public roadways, must register their vehicle through the County Tax Assessor-Collector in their county of residence. A license plate that includes a current registration sticker must be attached to the rear of a motorcycle or moped.

#### Inspection

All motor vehicles registered in Texas (including motorcycles, and mopeds) must be inspected each year at an Official Motor Vehicle Inspection Station. When the motorcycle or moped passes inspection, the approved certificate must be placed near the rear license plate. These certificates are good for one year from the month of inspection.

#### Insurance

All motor vehicle operators must show proof of liability insurance when the vehicle is registered, inspected, or when obtaining an original Texas Driver License.

## **BE ROAD READY**

Studies indicate that in crashes, motorcycle riders and passengers are more likely to be seriously injured or killed than automobile operators or passengers. Your chance of reaching your destination safely is directly related to the preparation you do before the ride. You need to mentally prepare by being alert, free of stress, sober, and ready for riding.

**Head Protection** – A helmet protects you against head injury, windblast, cold, sunburn, flying objects, and hearing loss. Head injuries account for the majority of motorcycle fatalities. Without a helmet, you are five times more likely to sustain a critical head injury in a crash. **Eye Protection** – Eyeglasses with shatterproof lenses protect the eyes but most styles do not seal out the wind that makes your eyes water. Goggles provide eye protection and most models protect your eyes from the wind. A motorcycle windshield or fairing alone is not adequate for eye protection. Eye protection should:

- Be shatterproof
- Be securely fastened
- Be optically clear
- Resist impact and penetration
- Not block peripheral vision

**Protective Clothing** – The clothes you wear when riding a motorcycle should protect you from sunburn, windburn, rain, dehydration, cold, and parts of the motorcycle, and provide visibility and comfort. In case of a crash, quality riding clothes may prevent or reduce the severity of cuts, abrasions, and bodily injury. Quality riding clothes consist of:

- Low-heeled footwear that covers the ankle with no dangling laces or rings and provides a good grip on the road surface and footpegs.
- Gloves that protect the hands from cuts and bruises, blisters, cold, wind, and provide better grip for control.
- Brightly colored long-sleeved shirt or jacket and long pants that will resist abrasions and fit comfortably without binding.
- Rain suits are recommended in rainy weather.

Face Shields – Any motorcyclist who has been hit in the face by a stone or an insect while riding can tell you about the benefits of face protection. Studies indicate that motorcycle riders with shields covering their faces suffer fewer facial injuries than others without a shield. A face shield should:

- Be securely fastened to the helmet
- Be free of scratches.
- Resist impact and penetration.

## **DISABLED PARKING**


It is a violation of state law, carrying a fine of \$500-\$750, for a person to park, stand, or stop any vehicle, including motorcycles, in a disabled person parking space. The law specifically states:

- 1. You may not park in a disabled parking space unless the vehicle (motorcycle) has a disabled license plate or a state issued removable windshield identification card;
- You may not use a disabled parking windshield identification card unless transporting the disabled person to whom it was issued;
- 3. You may not lend your windshield identification card to someone else;
- You may not block an access or curb ramp;

Additionally, certain municipalities also prohibit stopping or standing a vehicle (motorcycle) in a disabled parking space unless bearing a disabled parking windshield identification card or disabled license plate.







### Do NOT park in striped areas

Do not park a vehicle (motorcycle) in striped areas adjacent to handicap parking spaces or in the striped area in front of the entrance to a business adjacent to a parking space. The striped area is for wheelchair lifts. In addition, motorcycles should not be parked on sidewalks. Parking on sidewalks can prevent a person who is handicapped from gaining access to a business or their residence.

## **PREPARING TO RIDE**

What you do before you start a trip goes a long way toward determining whether or not you will get where you want to go safely. Before taking off on any trip, a safe rider makes a point to:

- 1. Wear the right gear.
- 2. Become familiar with the motorcycle.
- 3. Check the motorcycle equipment.
- 4. Be a responsible rider.

## WEAR THE RIGHT GEAR

When you ride, your gear is "right" if it protects you. In any crash, you have a far better chance of avoiding serious injury if you wear:

- A DOT compliant helmet.
- Face or eye protection.
- Protective clothing.

## Helmet Use


Crashes can occur — particularly among untrained, beginning riders. And one out of every five motorcycle crashes results in head or neck injuries. Head injuries are just as severe as neck injuries — and far more common. Crash analyses show that head and neck injuries account for a majority of serious and fatal injuries to motorcyclists. Research also shows that, with few exceptions, head and neck injuries are reduced by properly wearing a quality helmet.

Some riders don't wear helmets because they think helmets will limit their view to the sides. Others wear helmets only on long trips or when riding at high speeds. But, here are some facts to consider:

• A DOT-compliant helmet lets you see as far to the sides as necessary. A study of more than 900 motorcycle crashes, where 40% of the riders wore helmets, did not find even one case in which a helmet kept a rider from spotting danger.

- **Most crashes happen** on short trips (less than five miles long), just a few minutes after starting out.
- **Most riders** are riding slower than 30 mph when a crash occurs. At these speeds, helmets can cut both the number and the severity of head injuries by half.

No matter what the speed, helmeted riders are three times more likely to survive head injuries than those not wearing helmets at the time of the crash. The single most important thing you can do to improve your chances of surviving a crash is to wear a securely-fastened, quality helmet.



## **Helmet Selection**

There are two primary types of helmets, providing two different levels of coverage: three-quarter and full face.

Whichever style you choose, you can get the most protection by making sure that the helmet:

## **PREPARING TO RIDE**

- Is designed to meet U.S. Department of Transportation (DOT) and state standards. Helmets with a label from the Snell Memorial Foundation also give you an assurance of quality.
- Fits snugly, all the way around.
- Has no obvious defects such as cracks, loose padding or frayed straps.

Whatever helmet you decide on, keep it securely fastened on your head when you ride. Otherwise, if you are involved in a crash, it's likely to fly off your head before it gets a chance to protect you.

## Eye and Face Protection

A plastic shatter-resistant faceshield can help protect your whole face in a crash. It also protects you from wind, dust, dirt, rain, insects and pebbles thrown up from cars ahead. These problems are distracting and can be painful. If you have to deal with them, you can't devote your full attention to the road.

Goggles protect your eyes, though they won't protect the rest of your face like a faceshield does. A windshield is not a substitute for a faceshield or goggles. Most windshields will not protect your eyes from the wind. Neither will eyeglasses or sunglasses. Glasses won't keep your eyes from watering, and they might blow off when you turn your head while riding.

To be effective, eye or faceshield protection must:

- Be free of scratches.
- Be resistant to penetration.
- Give a clear view to either side.
- Fasten securely, so it does not blow off.
- **Permit air** to pass through, to reduce fogging.

• **Permit enough room** for eyeglasses or sunglasses, if needed.

Tinted eye protection should not be worn when little light is available.



## Clothing

The right clothing protects you in a collision. It also provides comfort, as well as protection from heat, cold, debris and hot and moving parts of the motorcycle. It can also make you more visible to others.

• Jacket and pants should cover arms and legs completely. They should fit snugly enough to keep from flapping in the wind, yet loosely enough to move freely. Leather offers the most protection. Sturdy synthetic material provides a lot of protection as well. Wear a jacket even in warm weather to prevent dehydration. Many are designed to protect without getting you overheated, even on summer days. Some riders choose jackets and pants with rigid "body armor" inserts in critical areas for additional protection.

- Boots or shoes should be high and sturdy enough to cover your ankles and give them support. Soles should be made of hard, durable, slip-resistant material. Keep heels short so they do not catch on rough surfaces. Tuck in laces so they won't catch on your motorcycle.
- **Gloves** allow a better grip and help protect your hands in a crash. Your gloves should be made of leather or similar durable material.
- Hearing protection reduces noise while allowing you to hear important sounds such as car horns or sirens. Long term exposure to engine and wind noise can cause permanent hearing damage even if you wear a full face helmet. Whether you choose disposable foam plugs or reusable custom molded devices, be sure you adhere to state laws regarding hearing protection.

In cold or wet weather, your clothes should keep you warm and dry, as well as protect you from injury. You cannot control a motorcycle well if you are numb. Riding for long periods in cold weather can cause severe chill and fatigue. A winter jacket should resist wind and fit snugly at the neck, wrists and waist. Good-quality rainsuits designed for motorcycle riding resist tearing apart or ballooning up at high speeds.

## KNOW YOUR MOTORCYCLE

There are plenty of things on the highway that can cause you trouble. Your motorcycle should not be one of them. To make sure that your motorcycle won't let you down:

- **Start** with the right motorcycle for you.
- Read the owner's manual.
- **Be familiar** with the motorcycle controls.
- **Check** the motorcycle before every ride.
- **Keep** it in safe riding condition between rides.
- **Avoid** add-ons and modifications that make your motorcycle harder to handle.

### The Right Motorcycle For You

First, make sure your motorcycle is right for you. It should "fit" you. Your feet should reach the ground while you are seated on the motorcycle, and the controls should be easy to operate. Smaller motorcycles are usually easier for beginners to operate.

#### TEST YOURSELF

#### A plastic shatter-resistant face shield:

- A. Is not necessary if you have a windshield.
- B. Only protects your eyes.
- C. Helps protect your whole face.
- D. Does not protect your face as well as goggles.

Answer - page 50

## **PREPARING TO RIDE**

## **Borrowing and Lending**

Borrowers and lenders of motorcycles, beware. Crashes are fairly common among beginning riders — especially in the first months of riding. Riding an unfamiliar motorcycle adds to the problem. If you borrow a motorcycle, get familiar with it in a controlled area. And if you lend your motorcycle to friends, make sure they are licensed and know how to ride before allowing them out into traffic.


No matter how experienced you may be, ride extra carefully on any motorcycle that's new or unfamiliar to you. More than half of all crashes involve riders with less than five months of experience on their motorcycle.

### Get Familiar with the Motorcycle Controls

Make sure you are completely familiar with the motorcycle before you take it out on the street. Be sure to review the owner's manual. This is particularly important if you are riding a borrowed motorcycle.

If you are going to use an unfamiliar motorcycle:

- Make all the checks you would on your own motorcycle.
- Find out where everything is, particularly the turn signals, horn, headlight switch, fuel-supply valve and engine cut-off switch. Find and operate these items without having to look for them.
- **Know the controls.** Work the throttle, clutch, brakes, and shifter a few times before you start riding.
- **Ride very cautiously** and be aware of surroundings. Accelerate gently, take turns more slowly and leave extra room for stopping.

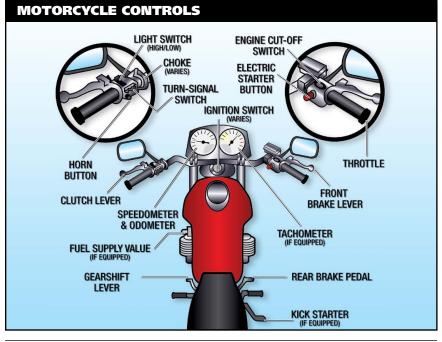

## **Check Your Motorcycle**

A motorcycle needs more frequent attention than a car. A minor technical failure on a car is seldom more than an inconvenience for the driver. The same failure on a motorcycle may result in a crash or having to leave your motorcycle parked on the side of the road. If anything is wrong with your motorcycle, you will want to find out about it before you get in traffic.

The primary source of information about how a motorcycle should be inspected and maintained is its owner's manual. Be sure to absorb all of its important information. A motorcycle will continue to ride like new if it is properly maintained and routine inspections become part of its maintenance cycle.

A pre-ride inspection only takes a few minutes and should be done before every ride to prevent problems. It is quick and easy to check the critical components and should be as routine and automatic as checking the weather forecast before heading out for the day. A convenient reminder developed by MSF is T-CLOCS<sup>5M</sup>. There is a T-CLOCS "tear-out" sheet at the back of this manual for you to keep with you when you ride. A T-CLOCS inspection should be conducted before every ride, and includes checks of:

#### T — Tires and Wheels

- Check tire inflation pressure, treadwear and general condition of sidewalls and tread surface.
- Try the front and rear brake levers one at a time. Make sure each feels firm and holds the motorcycle when fully applied.

#### C — Controls

• Make sure the clutch and throttle operate smoothly. The throttle

should snap back to fully closed when released. The clutch should feel tight and should operate smoothly.

- Try the horn. Make sure it works.
- Clean and adjust your mirrors before starting. It's difficult to ride with one hand while you try to adjust a mirror. Adjust each mirror so you can see the lane behind and as much as possible of the lane next to you. When properly adjusted, a mirror may show the edge of your arm or shoulder – but it's the road behind you and to the side that are most important.

#### L — Lights and Electrics

- Check both headlight and taillight. Test your switch to make sure both high and low beams work.
- Turn on both right and left hand turn signals. Make sure all lights are working properly.
- Try both brakes and make sure each one turns on the brake light.

#### O — Oil and Other Fluids

- Check engine oil and transmission fluid levels.
- Check the brake hydraulic fluid and coolant level weekly.
- Be sure your fuel valve is open before starting out. With the fuel valve closed, your motorcycle may start with only the fuel that is still in the lines, but will stall once the lines are empty.
- Look underneath the motorcycle for signs of an oil or fuel leak.

#### C — Chassis

• Check the front suspension. Ensure there is no binding. The rear shocks and springs should move smoothly.

## **PREPARING TO RIDE**

• Be sure the chain is adjusted according to the manufacturer's specifications and that the sprockets are not worn or damaged.

#### S — Stands

• Ensure the side stand operates smoothly and that the spring holds it tightly in the up position. If equipped, the center stand should also be held firmly against the frame whenever the motorcycle is moving.

Additionally, regular maintenance such as tune-ups and oil changes are as important for a motorcycle as routine checkups by your doctor are for you. Wear and tear is normal with use; routine maintenance will help prevent costly breakdowns. The schedule for regular upkeep for motorcycle parts and controls is contained in your motorcycle's owner's manual.

## KNOW YOUR RESPONSIBILITIES

"Accident" implies an unforeseen event that occurs without fault or negligence. In traffic, that is not the case. In fact, most people involved in a crash can claim some responsibility for what takes place.

Consider a situation where someone decides to drive through an intersection on a yellow light turning red. Your light turns green. You pull into the intersection without checking for possible traffic. That is all it takes for the two of you to crash. It was the driver's responsibility to stop, and it was your responsibility to look before pulling out. Both of you are at fault. Someone else might be the first to start the chain of events leading to a crash, but it doesn't leave any of us free of responsibility. As a rider you can not be sure that other operators will see you or yield the right of way. To lessen your chances of a crash occurring:

- **Be visible** wear proper clothing, use your headlight, ride in the best lane position to see and be seen.
- **Communicate your intentions** use the proper signals, brake light and lane position.
- Maintain an adequate space cushion — when following, being followed, lane sharing, passing and being passed.
- Search your path of travel 12 seconds ahead.
- Identify and separate hazards.
- **Be prepared to act** remain alert and know how to carry out proper crash-avoidance skills.

Blame doesn't matter when someone is injured in a crash. The ability to ride aware, make critical decisions and carry them out separates responsible riders from the rest. Remember, it is up to you to keep from being the cause of, or an unprepared participant in, any crash.

#### TEST YOURSELF

#### More than half of all crashes:

- A. Occur at speeds greater than 35mph.
- B. Happen at night.
- C. Are caused by worn tires.
- D. Involve riders who have less than five months of experience on their motorcycles.

Answer - page 50

2

This manual cannot teach you how to control direction, speed or balance. That is something you can learn only through practice, preferably in a formal course of instruction like an MSF *RiderCourse*. But control begins with knowing your abilities and riding within them, along with knowing and obeying the rules of the road.

## **BASIC VEHICLE CONTROL**

### **Body Position**

To control a motorcycle well:

- **Posture** Position yourself comfortably so you are able to operate all the controls and can use your arms to steer the motorcycle rather than to hold yourself up. This helps you bond with your motorcycle and allows you to react quickly to hazards.
- Seat Sit far enough forward so that arms are slightly bent when you hold the handgrips. Bending your arms permits you to press on the handlebars without having to stretch.
- Hands Hold the handgrips firmly to keep your grip over rough surfaces. Start with your right wrist flat. This will help you keep from accidentally using too much throttle. Also, adjust the handlebars



so your hands are even with or below your elbows. This permits you to use the proper muscles for precision steering.


- **Knees** Keep your knees against the gas tank to help you keep your balance as the motorcycle turns.
- Feet Keep your feet firmly on the footrests to maintain balance. Don't drag your feet. If your foot catches on something, you could be injured and it could affect your control of the motorcycle. Keep your feet near the controls so you can get to them fast if needed. Also, do not let your toes point downward — they may get caught between the road and the footrests.

## **Shifting Gears**

There is more to shifting gears than simply getting the motorcycle to pick up speed smoothly. Learning to use the gears when downshifting, turning or starting on hills is equally important for safe motorcycle operation.

The gearshift lever is located in front of the left footrest and is operated by the left foot. To shift "up" to a higher gear, position your foot under the shift lever and lift. To downshift, press the shift lever down. The shift lever changes one gear each time it is lifted or pressed down. Whenever the lever is released, spring loading returns it to center, where the mechanism resets for the next shift up or down. A typical gear pattern is 1-N-2-3-4-5. The N is for neutral,

which is selected by either a "half lift" from 1st gear or a "half press" from 2nd gear. Most motorcycles have five gears, but some have four or six gears.



As your motorcycle increases speed, you will need to shift up to a higher gear. Shift up well before the engine RPM reaches its maximum recommended speed. As a general rule, shift up soon enough to avoid over-revving the engine, but not so soon to cause the engine to lug.

When upshifting, use a 3-step process: 1) Roll off the throttle as you squeeze the clutch lever, 2) lift the shift lever firmly as far as it will go, 3) smoothly ease out the clutch and adjust the throttle. Once the shift is completed, release the shift lever to permit it to reset for the next shift.

You should shift down through the gears with the clutch as you slow or stop, and can also shift down when you need more power to accelerate.

Make certain you are riding slowly enough when you shift into a lower gear. If not, the motorcycle will lurch, and the rear wheel may skid. When riding downhill or shifting into first gear you may need to use the brakes to slow enough before downshifting safely.

When downshifting, use a 3-step **process:** 1) Roll off the throttle as you squeeze the clutch lever, 2) press the shift lever down firmly, 3) ease out the clutch lever as you roll on the throttle. Once the shift is completed, release the shift lever to permit it to reset for the next shift. Rolling on the throttle slightly while smoothly easing out the clutch can help the engine come up to speed more quickly and make the downshift smoother. Shifting to a lower gear causes an effect similar to using the brakes. This is known as engine braking. To use engine braking, shift down one gear at a time and ease out the clutch through the friction zone between each downshift. Keep the clutch in the friction zone until the engine speed stabilizes. Then ease out the lever fully until ready for the next downshift. Usually you shift gears one at a time, but it is possible to shift through more than one gear while the clutch is squeezed.

Remain in first gear while you are stopped so that you can move out quickly if you need to.

Work toward a smooth, even clutch release, especially when downshifting. It is best to change gears before entering a turn. However, sometimes shifting while in the turn is necessary. If so, remember to do so smoothly. A sudden change in power to the rear wheel can cause a skid.

## Braking

Improper braking technique remains a significant contributing factor in many motorcycle crashes. Your motorcycle has two brake controls: one for the front wheel and one for the rear wheel. Always use both brakes every time you slow or stop. The front brake is more powerful and can provide at least 70% of your total stopping power. The front brake is safe to use if you use it properly.

Maximum straight-line braking is accomplished by fully applying both front and rear brakes without locking either wheel.

To do this:

- Squeeze the front brake smoothly, firmly and with progressively more force. Do not grab the brake lever or use abrupt pressure.
- As the motorcycle's weight transfers forward, more traction becomes available at the front wheel, so the front brake can be applied harder after braking begins.
- Keep your knees against the tank and your eyes up, looking well ahead. This helps you stop the motorcycle in a straight line.
- Apply light-to-lighter pressure to the rear brake pedal to prevent a rear wheel skid. As weight transfers forward less traction is available at the rear. Use less rear brake pressure.

Using both brakes for even "normal" stops will permit you to develop the proper habit or skill of using both brakes properly in an emergency. Squeeze the front brake and press down on the rear. Grabbing at the front brake or jamming down on the rear can cause the brakes to lock, resulting in control problems.

## Braking in a Corner

Any time a motorcycle is leaned over, the amount of traction available for braking is reduced. The greater the lean angle, the more the possibility of the tires losing traction. To stop as quickly and as safely as possible in a curve, and depending on road and traffic conditions, try to get the motorcycle as perpendicular to the road as possible, then brake. If conditions do not allow, brake smoothly and gradually, but do not apply as much braking force as you would if the motorcycle were straight up. As you slow, you can reduce your lean angle, and as more traction becomes available for braking, you can more firmly apply the brakes, so that by the time the motorcycle is stopped, the motorcycle is straight up, and the handlebars are squared.

## Linked and Integrated Braking Systems

Some motorcycles have linked braking which connects the front and rear brakes on the motorcycle and applies braking pressure to both brakes when either the front lever or rear pedal is applied. An integrated braking system is a variation of the linked system in which partial front braking is applied whenever the rear brake is activated. Consult your owner's manual for a detailed explanation on the operation and effective use of these systems.

# Anti-Lock Braking Systems (ABS)

ABS is designed to prevent wheel lock-up and avoid skids when stopping in straight-line, panic situations. ABS operates when maximum pressure on both the front and rear brake controls is applied. If electronic sensors detect the possibility of a wheel lock, brake hydraulic pressure is released then reapplied to maintain maximum braking effectiveness.

The system is capable of releasing and reapplying pressure more than 15 times per second.

## Turning

Approach turns and curves with caution. Riders often try to take curves or turns too fast. When they can not hold the turn, they end up crossing into another lane of traffic or going off the road. Or, they overreact and brake too hard, causing a skid and loss of control.

#### Use four steps for better control:

- **SLOW** Reduce speed before the turn by closing the throttle and, if necessary, applying both brakes.
- LOOK Look through the turn to where you want to go. Turn just your head, not your shoulders, and keep your eyes level with the horizon.
- **PRESS** To turn, the motorcycle must lean. To lean the motorcycle, press on the handgrip in the direction of the turn. Press left handgrip lean left go left. Press right handgrip lean right go right. The higher the speed in a turn, the greater the lean angle.
- **ROLL** Roll on the throttle to maintain or slightly increase speed. This helps stabilize the motorcycle.

TEST YOURSELF

#### When riding, you should:

- A. Turn your head and shoulders to look through turns.
- B. Keep your arms straight.
- C. Keep your knees away from the gas tank.
- D. Turn just your head and eyes to look where you are going.

Answer - page 50


2

In normal turns, the rider and the motorcycle should lean together at the same angle.

#### NORMAL TURNS



In slow, tight turns, counterbalance by leaning the motorcycle only and keeping your body straight.



## **KEEPING YOUR DISTANCE**

The best protection you can have is distance — a "cushion of space" — separating yourself from other vehicles on the roadway. This will provide you with a clear view of emerging traffic situations, so that if someone else makes a mistake, you will have:

- More time to respond.
- More space to maneuver, including an escape route if necessary.

#### Lane Positions

Successful motorcyclists know that they are safer when clearly seen. In some ways the size of the motorcycle can work to your advantage. Each traffic lane gives a motorcycle three paths of travel, as indicated in the illustration.

Your lane position should help you:


- Increase your ability to see and be seen.
- Avoid others' blind spots.
- Avoid surface hazards.
- Protect your lane from other drivers.
- Communicate your intentions.

- Avoid windblast from other vehicles.
- Provide an escape route.
- Set up for turns.

Many motorcyclists consider the left third of the lane – the left tire track of automobiles – to be their default lane position. You should then consider varying your lane position as conditions warrant, keeping in mind that no portion of the lane need be avoided — including the center.

You should position yourself in the portion of the lane where you are most likely to be seen and you can maintain a space cushion around you. Change position as traffic situations change. Ride in path 2 or 3 if vehicles and other potential problems are on your left only. Remain in path 1 or 2 if hazards are on your right only. If vehicles are being operated on both sides of you, the center of the lane, path 2, is usually your best option.

Remember, the center third of the lane is the place where debris and oil drippings from cars collect and where

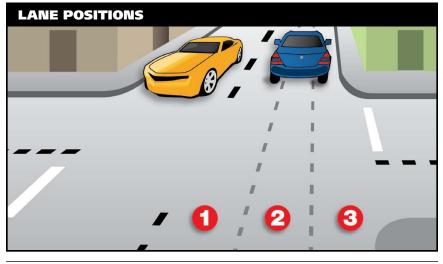



hazards such as manhole covers are located. Unless the road is wet, the average center strip permits adequate traction to ride on safely. You can operate to the left or right of the grease strip and still be within the center third of the traffic lane. Avoid riding on big buildups of oil and grease usually found at busy intersections or tollbooths.

Experienced riders rely on their own best judgment and instincts. One absolute, however, is to avoid riding in another vehicle's blind spot.

### **Following Another Vehicle**

"Following too closely" is a factor in crashes involving motorcyclists. In traffic, motorcycles need as much distance to stop as cars. Normally, **a minimum of two seconds** distance should be maintained behind the vehicle ahead.

To gauge your following distance:

• Pick out a marker, such as a pavement marking or lamppost, on or near the road ahead.

- When the rear bumper of the vehicle ahead passes the marker, count off the seconds: "one-thousand-one, one-thousand-two."
- If you reach the marker before you reach "two," you are following too closely.

A two-second following distance leaves a minimum amount of space to stop or swerve if the driver ahead stops suddenly. It also permits a better view of potholes and other hazards in the road.

A larger cushion of space is needed if your motorcycle will take longer than normal to stop. If the pavement is slippery, if you cannot see through the vehicle ahead, or if traffic is heavy and someone may squeeze in front of you, open up a three-second or more following distance.

Keep well behind the vehicle ahead even when you are stopped. This will make it easier to get out of the way if someone bears down on you from behind. It will also give you a cushion of space if the vehicle ahead starts to back up for some reason.

When behind a car, ride where the driver can see you in the rearview mirror. Riding in the center portion of the lane should put your image in the middle of the rearview mirror — where a driver is most likely to see you.

Riding at the far side of a lane may permit a driver to see you in a sideview mirror. But remember that most drivers don't look at their sideview mirrors nearly as often as they check the rearview mirror. If the traffic situation allows, the center portion of the lane is usually the best place for you to be seen by the drivers ahead and to prevent lane sharing by others.

### **Being Followed**

Speeding up to lose someone following too closely only ends up with someone tailgating you at a higher speed.

A better way to handle tailgaters is to get them in front of you. When someone is following too closely, change lanes and let them pass. If you can't do this, slow down and open up extra space ahead of you to allow room for both you and the tailgater to stop. This will also encourage them to pass. If they do not pass, you will have given yourself and the tailgater more time and space to react in case an emergency does develop ahead.


## Passing and Being Passed

Passing and being passed by another vehicle is not much different than with a car. However, visibility is more critical. Be sure other drivers see you, and that you see potential hazards.

### Passing

- 1. Ride in the left portion of the lane at a safe following distance to increase your line of sight and make you more visible. Signal and check for oncoming traffic. Use your mirrors and turn your head to look for traffic behind.
- 2. When safe, move into the left lane and accelerate. Select a lane position that does not crowd the car and provides space to avoid hazards in your lane.
- **3. Ride through the blind spot** as quickly as possible.
- Signal again, and complete mirror and headchecks before returning to your original lane and then cancel the signal.

Remember, passes must be completed within posted speed limits, and only where permitted. Know your signs and road markings!




## **Being Passed**

When you are being passed from behind, stay in the center portion of your lane. Riding close to the passing vehicle could put you in a hazardous situation.

#### Avoid being hit by:

- The other vehicle A slight mistake by you or the passing driver could cause a sideswipe.
- **Extended mirrors** Some drivers forget that their mirrors hang out farther than their fenders.
- Objects thrown from windows — Even if the driver knows you're there, a passenger may not see you and might toss something on you or the road ahead of you.
- Blasts of wind from larger vehicles — They can affect your control. You have more room for error if you are in the middle portion when hit by this blast than if you are on either side of the lane.



**Do not** move into the portion of the lane farthest from the passing vehicle. It might invite the other driver to cut back into your lane too early.

### Lane Sharing

Cars and motorcycles need a full lane to operate safely. Lane sharing is usually prohibited.

Riding between rows of stopped or moving cars in the same lane can leave you vulnerable to the unexpected. A hand could come out of a window; a door could open; a car could turn suddenly. Discourage lane sharing by others. Keep a center-portion position whenever drivers might be tempted to squeeze by you. Drivers are most tempted to do this:

- In heavy, bumper-to-bumper traffic.
- When they want to pass you.
- When you are preparing to turn at an intersection.
- When you are moving into an exit lane or leaving a highway.



#### Usually, a good way to handle tailgaters is to:

- A. Change lanes and let them pass.
- B. Use your horn and make obscene gestures.
- C. Speed up to put distance between you and the tailgater.
- D. Ignore them.

Answer - page 50


4


### **Merging Cars**

Drivers on an entrance ramp may not see you on the highway. Give them plenty of room. Change to another lane if one is open. If there is no room for a lane change, adjust speed to open up space for the merging driver.

### **Cars Alongside**

Do not ride next to cars or trucks in other lanes if you do not have to. You might be in the blind spot of a car in the next lane, which could switch into your lane without warning. Cars in the next lane also block your escape if you come upon danger in your own lane. Speed up or drop back to find a place clear of traffic on both sides.





## SEE

Good, experienced riders are always aware of what is going on around them. They reduce their risk by using MSF's three-step SEE<sup>™</sup> strategy:

- Search
- Evaluate
- Execute


SEE will help you assess what is going on in traffic so you can plan and implement the safest course of action as traffic situations change. Let's look at each of these steps.

## Search

How assertively you search, and how much time and space you have, can eliminate or minimize risk. As you search, focus on finding

potential escape routes, especially in or around intersections, shopping areas and school and construction zones.

One way to search is to use your "RiderRadar" to aggressively scan the environment ahead of you, to the sides, and behind you to avoid potential hazards even before they arise. There are three "lead times" experienced riders consider. First, be alert and scan for hazards that are about 2 seconds ahead of you, or within your following distance. Scanning your 4-second immediate path can allow you time for a quick response if something should go wrong. Anything that is within 4 seconds of your path is considered immediate because 4 seconds is considered enough time and space to swerve and/or brake

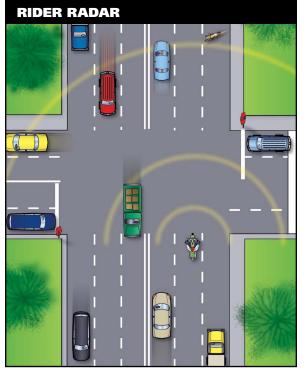

for fixed hazards or for someone or something entering your path of travel.

Finally, experienced riders search for hazards that are further out, looking ahead to an area it would take about 12 seconds to reach. This provides time to prepare for a situation before it becomes immediate.

Using the SEE strategy will help you to **Search** for a variety of factors such as:

- Oncoming traffic that may turn left in front of you.
- **Traffic** coming from the left and from the right.
- **Traffic** approaching from behind.
- **Hazardous** road conditions that require you to be alert, especially in areas with limited visibility. Visually

"busy" surroundings could hide you and your motorcycle from others.

## Evaluate

Evaluate means to think about how hazards can interact to create risks for you. Anticipate potential problems and have a plan to reduce risks, particularly when faced with:

- Road and surface characteristics such as potholes, guardrails, bridges, telephone poles and trees that will not move into your path, but may influence your riding strategy.
- Traffic control devices including traffic signals, warning signs, and pavement markings, which will require you to carefully evaluate circumstances ahead.
- Vehicles and other traffic that may move into your path and increase the likelihood of a crash. Think about your time and space requirements in order to maintain a margin of safety, and give yourself time to react if an emergency arises.

## Execute

Finally, **Execute** your decision. To create more space and minimize harm from any hazard:

- **Communicate** your presence with lights and/or horn.
- Adjust your speed by accelerating, stopping or slowing.
- Adjust your position and/or direction by swerving, changing lanes, or moving to another position within your lane.

Apply the old adage "one step at a time" to handle two or more hazards. Adjust speed to permit two hazards to separate. Then deal with them one at a time as single hazards. Decisionmaking becomes more complex with three or more hazards. Evaluate the consequences of each and give equal distance to the hazards.

In potential high-risk areas, such as intersections, shopping areas and school and construction zones, cover the clutch and both brakes to reduce the time you need to react.

## INTERSECTIONS

The greatest potential for conflict between you and other traffic is at intersections. An intersection can be in the middle of an urban area or at a driveway on a residential street — anywhere traffic may cross your path of travel. Over one-half of motorcycle/car crashes are caused by drivers entering a rider's right-of-way. Cars that turn left in front of you, including cars turning left from the lane on your right, and cars on side streets that pull into your lane, are the biggest dangers. Your use of SEE at intersections is critical.


#### TEST YOURSELF

## To reduce your reaction time, you should:


- A. Ride slower than the speed limit.
- B. Cover the clutch and the brakes.
- C. Shift into neutral when slowing.
- D. Pull in the clutch when turning.

#### Answer - page 50

-

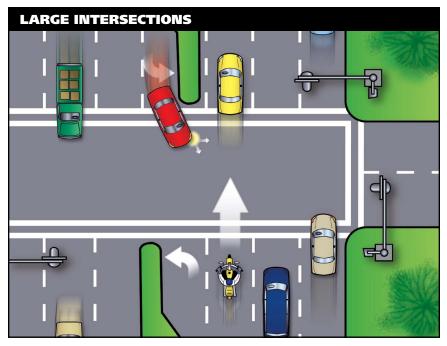

There are no guarantees that others see you. Never count on "eye contact" as a sign that a driver will yield. Too often, a driver looks right at a motorcyclist and still fails to "see" him or her. The only eyes that you can count on are your own. If a car can enter your path, assume that it will. Good riders are always "looking for trouble" — not to get into it, but to stay out of it.



Increase your chances of being seen at intersections. Ride with your headlight on and in a lane position that provides the best view of oncoming traffic. Provide a space cushion around the motorcycle that permits you to take evasive action. When approaching an intersection where a vehicle driver is preparing to cross your path, slow down and select a lane position to increase your visibility to that driver. Cover the clutch lever and both brakes to reduce reaction time. As you enter

### TEST YOURSELF 6

#### Making eye contact with other drivers:

- A. Is a good sign they see you.
- B. Is not worth the effort it takes.
- C. Doesn't mean that the driver will yield.
- D. Guarantees that the other driver will yield to you.

Answer - page 50

the intersection, move away from the vehicle. Do not change speed or position radically, as drivers might think you are preparing to turn. Be prepared to brake hard and hold your position if an oncoming vehicle turns in front of you, especially if there is other traffic around you. This strategy should also be used whenever a vehicle in the oncoming lane of traffic is signaling for a left turn, whether at an intersection or not.

### **Blind Intersections**

If you approach a blind intersection, move to the portion of the lane that will bring you into another driver's field of vision at the earliest possible moment. In this picture, the rider has moved to the left portion of the lane — away from the parked car — so the driver on the cross street can see him as soon as possible.


Remember, the key is to see as much as possible and remain visible to others while protecting your space.

### Stop Signs

If you have a stop sign or stop line, stop there first. Then edge forward and stop again, just short of where the cross-traffic lane meets your lane. From that position, lean your body forward and look around buildings, parked cars or bushes to see if anything is coming. Just make sure your front wheel stays out of the cross lane of travel while you're looking.

## **Passing Parked Cars**

When passing parked cars, stay toward the left of your lane. You can avoid problems caused by doors opening, drivers getting out of cars or people stepping from between cars. If oncoming traffic is present, it is usually best to remain in the center- lane position to maximize your space cushion.








A bigger problem can occur if the driver pulls away from the curb without checking for traffic behind. Even if he does look, he may fail to see you.

In either event, the driver might cut into your path. Slow down or change lanes to make room for someone cutting in.

Cars making a sudden U-turn are the most dangerous. They may cut you off entirely, blocking the whole roadway and leaving you with no place to go. Since you can't tell what a driver will do, slow down and get the driver's attention. Sound your horn and continue with caution.



## Parking at the Roadside

If parking in a parallel parking space next to a curb, position the motorcycle at an angle with the rear wheel to the curb. (Note: Some cities have ordinances that require motorcycles to park parallel to the curb.)

## **INCREASING CONSPICUITY**

In crashes with motorcyclists, drivers often say that they never saw the motorcycle. From ahead or behind, a motorcycle's outline is much smaller than a car's. Also, it's hard to see something you are not looking for, and most drivers are not looking for motorcycles. More likely, they are looking through the skinny, two-wheeled silhouette in search of cars that may pose a problem to them.

Even if a driver does see you coming, you are not necessarily safe. Smaller vehicles appear farther away and seem to be traveling slower than they actually are. It is common for drivers to pull out in front of motorcyclists, thinking they have plenty of time. Too often, they are wrong.

However, you can do many things to make it easier for others to recognize you and your motorcycle.

## Clothing

Most crashes occur in broad daylight. Wear bright-colored clothing to increase your chances of being seen. Remember, your body is half of the visible surface area of the rider/motorcycle unit.


Bright orange, red, yellow or green jackets/vests are your best bets for being seen. Your helmet can do more than protect you in a crash. Brightly colored helmets can also help others see you.

Any bright color is better than drab or dark colors. Reflective, bright-colored clothing (helmet and jacket/vest) is best.

Reflective material on a vest and on the sides of the helmet will help drivers coming from the side to spot you. Reflective material can also be a big help for drivers coming toward you or from behind.

## Headlight

The best way to help others see your motorcycle is to keep the headlight on — **Use your high beam whenever you are not following or meeting a car.** (new motorcycles sold in the USA since 1978 automatically have the headlights on when running). Studies show that, during the day, a motorcycle with its light on is twice as likely to be noticed. Use low beam at night and in fog.



## Signals

The signals on a motorcycle are similar to those on a car. They tell others what you plan to do.

However, due to a rider's added vulnerability, signals are even more important. Use them anytime you plan to change lanes or turn. Use them even when you think no one else is around. It's the car you do not see that is going to give you the most trouble. Your signal lights also make you easier to spot. That is why it is a good idea to use your turn signals even when what you plan to do is obvious.

When you enter a freeway, drivers approaching from behind are more likely to see your signal blinking and make room for you.

Turning your signal light on before each turn reduces confusion and frustration

for the traffic around you. Once you turn, make sure your signal is off or a driver may pull directly into your path, thinking you plan to turn again. Use your signals at every turn so drivers can react accordingly. Don't make them guess what you intend to do.

## Brake Light

Your motorcycle's brake light is usually not as noticeable as the brake lights on a car — particularly when your taillight is on. (It goes on with the headlight.) If the situation will permit, help others notice you by flashing your brake light before you slow down. It is especially important to flash your brake light before:

- You slow more quickly than others might expect (turning off a high-speed highway).
- You slow where others may not expect it (in the middle of a block or at an alley).

If you are being followed closely, it is a good idea to flash your brake light before you slow. The tailgater may be watching you and not see something ahead that will make you slow down. This will hopefully discourage them from tailgating and warn them of hazards ahead they may not see.

## **Using Your Mirrors**

While it is most important to keep track of what is happening ahead, you can not afford to ignore situations behind. Traffic conditions change quickly. Knowing what is going on behind is essential for you to make a safe decision about how to handle trouble ahead.

Frequent mirror checks should be part of your normal searching routine. Make a special point of using your mirrors:

- When you are stopped at an intersection. Watch cars coming up from behind. If the drivers are not paying attention, they could be on top of you before they see you.
- Before you change lanes. Make sure no one is about to pass you.
- Before you slow down. The driver behind may not expect you to slow, or may be unsure about where you will slow. For example, you signal a turn and the driver thinks you plan to turn at a distant intersection, rather than at a nearer driveway.

Most motorcycles have rounded (convex) mirrors. These provide a wider view of the road behind than do flat mirrors. They also make cars seem farther away than they really are. If you are not used to convex mirrors, get familiar with them. (While you are stopped, pick out a parked car in your mirror. Form a mental image of how far away it is. Then, turn around and look at it to see how close you came.) Practice with your mirrors until you become a good judge of distance. Even then, allow extra distance before you change lanes.

## Head Checks

Checking your mirrors is not enough. Motorcycles have "blind spots" like cars. Before you change lanes, turn your head, and look to the side for other vehicles.

#### TEST YOURSELF

#### Reflective clothing should:

- A. Be worn at night.
- B. Be worn during the day.
- C. Not be worn.
- D. Be worn day and night

Answer - page 50

7/



On a road with several lanes, check the far lane and the one next to you. A driver in the distant lane may head for the same space you plan to take.

Frequent head checks should be your normal scanning routine, also. Only by knowing what is happening **all around** you are you fully prepared to deal with it.

#### Horn

Be ready to use your horn to get someone's attention quickly.

It is a good idea to give a quick beep before passing anyone that may move into your lane.

Here are some situations:

- A driver in the lane next to you is driving too closely to the vehicle ahead and may want to pass.
- A parked car has someone in the driver's seat.
- Someone is in the street, riding a bicycle or walking.

In an emergency, sound your horn loud and long. Be ready to stop or swerve away from the danger. Keep in mind that a motorcycle's horn is not as loud as a car's therefore, use it, but do not rely on it. Other strategies, like having time and space to maneuver, may be appropriate along with the horn.

## **Riding at Night**

At night it is harder for you to see and be seen. Picking your headlight or taillight out of the car lights around you is not easy for other drivers. To compensate, you should:

- **Reduce Your Speed** Ride even slower than you would during the day — particularly on roads you do not know well. This will increase your chances of avoiding a hazard.
- Increase Distance Distances are harder to judge at night than during the day. Your eyes rely upon shadows and light contrasts to determine how far away an object is and how fast it is coming. These contrasts are missing or distorted under artificial lights at night.
  Open up a three-second following distance or more. And allow more distance to pass and be passed.
- Use the Car Ahead The headlights of the car ahead can give you a better view of the road than even your high beam can. Taillights bouncing up and down can alert you to bumps or rough pavement.
- Use Your High Beam Get all the light you can. Use your high beam whenever you are not following or meeting a car. Be visible: Wear reflective materials when riding at night.
- Be Flexible About Lane Position. Change to whatever portion of the lane is best able to help you see, be seen and keep an adequate space cushion.

## **CRASH AVOIDANCE**

No matter how careful you are, there will be times when you find yourself in a tight spot. Your chances of getting out safely depend on your ability to react quickly and properly. Often, a crash occurs because a rider is not prepared or skilled in crash-avoidance maneuvers.

Know when and how to stop or swerve, two skills critical in avoiding a crash. It is not always desirable or possible to stop quickly to avoid an obstacle. Riders must also be able to swerve around an obstacle. Determining which skill is necessary for the situation is important as well.

Studies show that most crash- involved riders:

- **Underbrake** the front tire and overbrake the rear.
- **Did not** separate braking from swerving or did not choose swerving when it was appropriate.

The following information offers some good advice.

### **Quick Stops**

To stop quickly, apply both brakes at the same time. Don't be shy about using the front brake, but don't "grab" it, either. Squeeze the brake lever firmly and progressively. If the front wheel locks, release the front brake immediately then reapply it firmly. At the same time, press down on the rear brake. If you accidentally lock the rear brake on a good traction surface, you can keep it locked until you have completely stopped; but, even with a locked rear wheel, you can control the motorcycle on a straightaway if it is upright and going in a straight line.


## **Stopping Quickly in a Curve**


If you know the technique, using both brakes in a turn is possible, although it should be done very carefully. When leaning the motorcycle some of the traction is used for cornering. Less traction is available for stopping. A skid can occur if you apply too much brake. Also, using the front brake incorrectly on a slippery surface may be hazardous. Use caution and squeeze the brake lever, never grab.


If you must stop quickly while turning in a curve, first straighten and square the handlebars, then stop. If you find yourself in a situation that does not allow straightening first, such as when there is a danger of running off the road in a left-hand curve, or when facing oncoming traffic in a right-hand curve, apply the brakes smoothly and gradually. As you slow, you can reduce your lean angle and apply more brake pressure until the motorcycle is straight and maximum brake pressure can be applied. Always straighten the handlebars in the last few feet of stopping to maintain your balance and remain upright.

## Swerving or Turning Quickly

Sometimes you may not have enough room to stop, even if you use both brakes properly. You may encounter an unexpected object in your path. Or the car ahead might squeal to a stop. The only way to avoid a crash may be to turn quickly or swerve around it. A swerve is a sudden change in direction. It can be two quick turns, or a rapid shift to the side. Apply a small amount of hand pressure to the handlegrip located on the side of your intended direction of escape. This will cause the motorcycle to lean quickly. The sharper the turn(s), the more the motorcycle must lean. Keep your body upright and allow the motorcycle to lean in the direction of the turn while keeping your knees against the tank and your feet solidly on the foot rests. Let the motorcycle move underneath you. Make your escape route the target of your vision. Press on the opposite handlegrip once you clear the obstacle to return you to your original direction of travel. To swerve to the left, press the left handlegrip, then press the right to recover. To swerve to the right, press right, then left. If braking is required,







**separate it from swerving.** Brake before or after – never while swerving.

### Maximum Straight-Line Braking

Maximum straight-line braking is accomplished by fully applying front and rear brakes without locking either wheel. Keep your body centered over the motorcycle and look well ahead, not down. This will help you keep the motorcycle in as straight a line as possible, minimizing lean angle and the likelihood of the wheels losing traction.

## **Front-Wheel Skids**

If the front wheel locks, release the front brake immediately and completely.

Reapply the brake smoothly. Frontwheel skids result in immediate loss of steering control and balance. Failure to fully release the brake lever immediately will result in a crash.


## **Rear-Wheel Skids**


A skidding rear tire is a dangerous condition that can result in a violent crash and serious injury or death. Too much rear brake pressure causes rear-wheel lockup. As soon as the rear wheel locks, your ability to change direction is lost. To regain control the brake must be released. However, if the rear wheel is out of alignment with the front, there is a risk of a high-side crash. This occurs when the wheels are out of alignment and a locked rear wheel is released. The motorcycle can abruptly snap upright and tumble, throwing the rider into the air ahead of the motorcycle's path. Even slight misalignment can result in a high-side crash.


### Curves


A primary cause of single-vehicle crashes is motorcyclists running wide in a curve or turn and colliding with the roadway or a fixed object.

Every curve is different. Be alert to whether a curve remains constant,









gradually widens, gets tighter or involves multiple turns. Ride within your skill level and posted speed limits.

Your best path may not always follow the curve of the road. Change lane position depending on traffic, road conditions and curve of the road. If no traffic is present, start at the outside of a curve to increase your line of sight and the effective radius of the turn. As you turn, move toward the inside of the curve, and as you pass the center, move to the outside to exit.

Another alternative is to move to the center of your lane before entering a

curve — and stay there until you exit. This permits you to spot approaching traffic as soon as possible. You can also adjust for traffic "crowding" the center line, or debris blocking part of your lane.

## HANDLING DANGEROUS SURFACES

Your chance of falling or being involved in a crash increases whenever you ride across:

- Uneven surfaces or obstacles.
- Slippery surfaces.
- Railroad tracks.
- Grooves and gratings.

### Uneven Surfaces and Obstacles

Watch for uneven surfaces such as bumps, broken pavement, potholes or small pieces of highway trash.

Try to avoid obstacles by slowing or going around them. If you must go over the obstacle, first determine if it is possible. Approach it at as close to a 90° angle as possible. Look where you want to go to control your path of travel. If you have to ride over the obstacle, you should:

- **Slow down** as much as possible before contact.
- Make sure the motorcycle is straight.
- **Rise slightly** off the seat with your weight on the footrests to absorb the shock with your knees and elbows, and avoid being thrown off the motorcycle.
- Just before contact, roll on the throttle slightly to lighten the front end.

If you ride over an object on the street, pull off the road and check

#### OBSTACLES



your tires and rims for damage before riding any farther.

#### **Slippery Surfaces**

Motorcycles handle better when ridden on surfaces that permit good traction. Surfaces that provide poor traction include:

- Wet pavement, particularly just after it starts to rain and before surface oil washes to the side of the road.
- **Gravel roads,** or where sand and gravel collect.
- Mud, leaves, snow, and ice.
- Lane markings (painted lines), steel plates and manhole covers, especially when wet.

To ride safely on slippery surfaces:

• Reduce Speed — Slow down before you get to a slippery surface to lessen your chances of skidding. Your motorcycle needs more distance to stop. And it is particularly important to reduce speed before entering wet curves.

- Avoid Sudden Moves Any sudden change in speed or direction can cause a skid. Be as smooth as possible when you speed up, shift gears, turn or brake.
- Use Both Brakes The front brake is still effective, even on a slippery surface. Squeeze the brake lever gradually to avoid locking the front wheel. Remember, gentle pressure on the rear brake.
- The center of a lane can be hazardous when wet. When it starts to rain, ride in the tire tracks left by cars. Often, the left tire track will be the best position, depending on traffic and other road conditions.
- Watch for oil spots when you put your foot down to stop or park. You may slip and fall.
- Dirt and gravel collect along the sides of the road especially on curves and ramps leading to and from highways. Be aware of what is on the edge of the road, particularly when making sharp turns and getting on or off freeways at high speeds.

# **RIDE WITHIN YOUR ABILITIES**

• Rain dries and snow melts faster on some sections of a road than on others. Patches of ice tend to develop in low or shaded areas and on bridges and overpasses. Wet surfaces or wet leaves are just as slippery. Ride on the least slippery portion of the lane and reduce speed.

Cautious riders steer clear of roads covered with ice or snow. If you can not avoid a slippery surface, keep your motorcycle straight up and proceed as *slowly* as possible. If you encounter a large surface so slippery that you must coast, or travel at a walking pace, consider letting your feet skim along the surface. If the motorcycle starts to fall, you can catch yourself. Be sure to keep off the brakes. If possible, squeeze the clutch and coast. Attempting this maneuver at anything other than the slowest of speeds could prove hazardous.

#### Railroad Tracks, Trolley Tracks and Pavement Seams

Usually it is safer to ride straight within your lane to cross tracks. Turning to take tracks head-on (at a 90° angle) can be more dangerous — your path may carry you into another lane of traffic.

For track and road seams that run parallel to your course, move far enough away from tracks, ruts, or pavement seams to cross at an angle of at least 45°. Then, make a deliberate turn. Edging across could catch your tires and throw you off balance.


### TEST YOURSELF

#### The best way to stop quickly is to:

- A. Use the front brake only.
- B. Use the rear brake first.
- C. Throttle down and use the front brake.
- D. Use both brakes at the same time.


Answer - page 50


8



#### **Grooves and Gratings**

Riding over rain grooves or bridge gratings may cause a motorcycle to weave. The uneasy, wandering feeling is generally not hazardous. Relax, maintain a steady speed and ride straight across. Crossing at an angle forces riders to zigzag to stay in the lane. The zigzag is far more hazardous than the wandering feeling.





### **MECHANICAL PROBLEMS**

You can find yourself in an emergency the moment something goes wrong with your motorcycle. In dealing with any mechanical problem, take into account the road and traffic conditions you face. Here are some guidelines that can help you handle mechanical problems safely.

#### Tire Failure

You will seldom hear a tire go flat. If the motorcycle starts handling differently, it may be a tire failure. This can be dangerous. You must be able to tell from the way the motorcycle

#### TEST YOURSELF

#### When it starts to rain it is usually best to:

A. Ride in the center of the lane.

- B. Pull off to the side until the rain stops.
- C. Ride in the tire tracks left by cars.

D. Increase your speed.

Answer - page 50

9

reacts. If one of your tires suddenly loses air, react quickly to keep your balance. Pull off and check the tires.

If the front tire goes flat, the steering will feel "heavy." A front-wheel flat is particularly hazardous because it affects your steering. You have to steer well to keep your balance.

If the rear tire goes flat, the back of the motorcycle may jerk or sway from side to side.

If either tire goes flat while riding:

- Hold handgrips firmly, ease off the throttle, and keep a straight course.
- If braking is required, gradually apply the brake of the tire that is not flat, if you are sure which one it is.
- When the motorcycle slows, edge to the side of the road, squeeze the clutch and stop.

#### **Stuck Throttle**

Twist the throttle back and forth several times. If the throttle cable is stuck, this may free it. If the throttle stays stuck, immediately operate the engine cut-off switch and pull in the clutch at the same time. This will remove power from the rear wheel, though engine sound may not immediately decline. Once the motorcycle is "under control," pull off and stop.

After you have stopped, check the throttle cable carefully to find the source of the trouble. Make certain the throttle works freely before you start to ride again.

#### Wobble

A "wobble" occurs when the front wheel and handlebars suddenly start to shake from side to side at any speed. Most wobbles can be traced to improper loading, unsuitable accessories

# **RIDE WITHIN YOUR ABILITIES**

or incorrect tire pressure. If you are carrying a heavy load, lighten it; if you can not, shift it. Center the weight lower and farther forward on the motorcycle. Make sure tire pressure, spring pre-load, air shocks and dampers are at the settings recommended for that much weight. Make sure windshields and fairings are mounted properly.

Check for poorly adjusted steering; worn steering parts; a front wheel that is bent, misaligned, or out of balance; loose wheel bearings or spokes; and worn swingarm bearings. If none of these is determined to be the cause, have the motorcycle checked out thoroughly by a qualified professional.

Trying to "accelerate out of a wobble" will only make the motorcycle more unstable. Instead:

- Grip the handlebars firmly, but do not fight the wobble.
- Close the throttle gradually to slow down. Do not apply the brakes; braking could make the wobble worse.
- Move your weight as far forward and down as possible.
- **Pull off the road** as soon as you can to fix the problem.

### **Drive Train Problems**

The drive train for a motorcycle uses either a chain, belt, or drive shaft to transfer power from the engine to

#### TEST YOURSELF

10

#### If your motorcycle starts to wobble:

- A. Accelerate out of the wobble.
- B. Use the brakes gradually.
- C. Grip the handlebars firmly and close the throttle gradually.
- D. Downshift.

Answer - page 50

the rear wheel. Routine inspection, adjustment, and maintenance makes failure a rare occurrence. A chain or belt that slips or breaks while you're riding could lock the rear wheel and cause your motorcycle to skid.

If the chain or belt breaks, you will notice an instant loss of power to the rear wheel. Close the throttle and brake to a stop in a safe area.

On a motorcycle with a drive shaft, loss of oil in the rear differential can cause the rear wheel to lock, and you may not be able to prevent a skid.

#### **Engine Seizure**

When the engine "locks" or "freezes" it is usually low on oil. The engine's moving parts can not move smoothly against each other, and the engine overheats. The first sign may be a loss of engine power or a change in the engine's sound. Squeeze the clutch lever to disengage the engine from the rear wheel. Pull off the road and stop. Check the oil. If needed, oil should be added as soon as possible or the engine will seize. When this happens, the effect is the same as a locked rear wheel. Let the engine cool before restarting.

### ANIMALS

Naturally, you should do everything you safely can to avoid hitting an animal. If you are in traffic, however, remain in your lane. Hitting something small is less dangerous to you than hitting something big — like a car.

Motorcycles seem to attract dogs. If you are being chased, downshift and approach the animal slowly. As you approach it, accelerate and leave the animal behind. Do not kick at the animal. Keep control of your motorcycle and look to where you want to go. For larger animals (deer, elk, cattle) brake and prepare to stop — they are unpredictable.

### FLYING OBJECTS

From time to time riders are struck by insects, cigarettes thrown from cars or pebbles kicked up by the tires of the vehicle ahead. If you are wearing face protection, it might get smeared or cracked, making it difficult to see. Without face protection, an object could hit you in the eye, face or mouth. Whatever happens, keep your eyes on the road and your hands on the handlebars. When safe, pull off the road and repair the damage.

## **GETTING OFF THE ROAD**

If you need to leave the road to check the motorcycle (or just to rest), be sure to:

- Check the roadside Make sure the surface of the roadside is firm enough to ride on. If it is soft grass, loose sand or if you're just not sure about it, slow way down before you turn onto it.
- **Signal** Drivers behind might not expect you to slow down. Give a clear signal that you will be slowing down and changing direction. Check your mirror and make a head check before you take any action.
- Pull off the road Get as far off the road as you can. It can be very hard to spot a motorcycle by the

#### TEST YOURSELF

11

#### If you are chased by a dog:

- A. Kick it away.
- B. Stop until the animal loses interest.
- C. Swerve around the animal.
- D. Approach the animal slowly, then speed up.

Answer - page 50

side of the road. You do not want someone else pulling off at the same place you are.

• Park carefully — Loose and sloped shoulders can make setting the side or center stand difficult.

### CARRYING PASSENGERS AND CARGO

The extra weight of a passenger or cargo will affect the way your motorcycle behaves, requiring extra practice, preparation and caution. For this reason, only experienced riders should attempt to carry passengers or large loads. Before taking a passenger or a heavy load on the street, prepare yourself and your motorcycle for safe operation in traffic.

### **Preparing Your Motorcycle**

**Tire Pressure** – Check the air pressure of both tires. Refer to the owner's manual or the label affixed to the motorcycle for the correct inflation specifications. Though most of the added weight will typically be on the rear wheel, do not forget to also check the pressure on the front tire. Correct inflation pressures will maintain maximum stability, steering precision and braking capability.

**Suspension** – With a heavy load, the riding characteristics and balance of the motorcycle will change. On some motorcycles, it will be necessary to adjust the suspension settings (spring preload, compression/damping settings, etc.) to compensate for the lowered rear of the motorcycle. Refer to the owner's manual for adjustment procedures and specifications.

**Headlight** – Prior to loading, position the motorcycle about 10 feet from a wall in an unlighted garage and mark the headlight beam location on the wall with chalk. With a

# **RIDE WITHIN YOUR ABILITIES**

full load and passenger, recheck the headlight beam location, check mirrors also. Use the adjusting screws on the headlight to lower the beam to the same height. Check your owner's manual for adjustment procedure.

### Equipment for Carrying a Passenger

- Be sure your passenger is properly attired, wearing the same level of personal protective gear as you.
- Be sure your motorcycle is equipped with passenger footrests.
- Your motorcycle should have a proper seat, one large enough to hold both you and your passenger without crowding. You should not sit more forward than you usually do.
- Check that there is a strap or solid handholds for your passenger to hold onto.

#### Preparing Your Passenger to Ride

Ensure your passenger is able to reach the passenger footrests, and is able to hold on to your waist, hips, belt, or the bike's passenger handholds. Children should be placed immediately behind the rider. A child sitting in front of the rider will not be able to properly balance him/herself and may interfere with the rider's control of the motorcycle.

Passenger safety begins with proper instruction. Riders should not assume that passengers are familiar with motorcycle handling, control, or balance. As a routine practice, always instruct your passenger on cycling basics prior to starting the trip, even if your passenger is a motorcycle rider.

As you prepare for your ride, tell your passenger to:

- Get on the motorcycle only after you have started the engine and have the transmission in neutral. As the passenger mounts, keep both your feet on the ground and the brakes applied.
- Sit as far forward as possible without hindering your control of the motorcycle.
- Hold firmly onto your waist, hips, belt or passenger handholds for balance and security.
- Keep both feet firmly on the cycle's footrests, even when stopped. Firm footing will prevent your passenger from falling off and pulling you off.
- Keep legs away from the muffler(s), chains or moving parts.
- Stay directly behind you and lean with you through turns and curves. It is helpful for the passenger to look over the rider's shoulder in the direction of turns and curves.
- Avoid unnecessary conversation and avoid leaning or turning around. Make no sudden moves that might affect the stability of the motorcycle when it is in operation.
- Rise slightly off the seat when crossing an obstacle.

Also, remind your passenger to tighten his or her hold when you:

- Approach surface hazards such as bumps or uneven road surfaces.
- Are about to start from a stop or begin moving into traffic.
- Are about to turn sharply or make a sudden move.

#### **Riding With Passengers**

Your motorcycle will respond slowly when you ride with a passenger. The

heavier your passenger, the longer it will take to speed up, slow down, or turn.

When riding with passengers:

- Ride a little slower, especially when taking curves, corners, or bumps. If any part of the motorcycle scrapes the ground at lean angle, steering control can be lost.
- Start slowing earlier as you approach a stop, and maintain a larger space cushion whenever slowing or stopping.
- Wait for larger gaps to cross, enter, or merge in traffic.

#### **Carrying Loads**

Everything you are likely to need for a riding holiday or weekend trip can be packed on your motorcycle in many different ways. There are complete luggage systems, saddlebags that are permanently attached to the motorcycle, soft bags that do not require a carrier system and can be tied to the seat, and a tank bag for other small items. You can also travel simply with only a backpack. Whatever you decide, do not exceed gross vehicle weight rating when traveling with cargo and a passenger, and always make adjustments to the motorcycle to compensate for the added weight.

#### Tips for Traveling with Passengers and Cargo

• Keep the load forward. Pack heavier items in the front of the tank bag. Lighter items such as your sleeping bag, ground pad or tent, should be packed on a luggage rack behind you. Try to place the load over, or in front of, the rear axle. Mounting loads behind the rear axle can affect how the motorcycle turns and brakes. It can also cause a wobble.

- Plan your route and length of each day's riding segment and allow plenty of time for breaks. Poor weather, breakdowns, and fatigue are always possible.
- Consider selecting some interesting secondary roads to occasionally reduce the monotony of the highway.
- Start as early in the morning as possible. When you are fresh, you ride at peak performance. For most riders, this is usually between 6 a.m. and 11 a.m. then, take a good hour's break for lunch. Your energy will pick up again in the afternoon.
- Do not forget sun protection in the summer. Some combinations of riding gear can leave your neck exposed, risking sunburn.
- If you wear a backpack, be sure it is securely attached to you. Try to adjust the shoulder straps so that the backpack rests lightly on the seat. This will reduce the tension in your neck and shoulders.
- If you have a tank bag, be sure it is securely mounted and does not obstruct your view of the controls or instruments. If necessary, pack it only partially full. When strapping the tank bag in place, make sure it does not catch any of the brake lines or cables in the area of the steering head.

#### TEST YOURSELF 12

#### Passengers should:

- A. Lean as you lean.
- B. Hold on to the motorcycle seat.
- C. Sit as far back as possible.
- D. Never hold onto you.

Answer - page 50

# **RIDE WITHIN YOUR ABILITIES**

- Secure loads low, or put them in saddlebags. Attaching a load to a sissy bar raises the motorcycle's center of gravity and can upset its balance.
- If you use saddlebags, load each with about the same weight.
  An uneven load can cause the motorcycle to pull to one side.
  Overloading may also cause the bags to catch in the wheel or chain, locking the rear wheel and causing the motorcycle to skid.
- Fasten the load securely with elastic cords (bungee cords or nets). Elastic cords with more than one attachment point per side are recommended. A loose load could catch in the wheel or chain, causing it to lock up, resulting in a skid. Rope can stretch and knots can come loose, permitting the load to shift or fall. You should stop and check the load often to make sure it has not shifted or loosened.
- Include a small tool kit and some common spare parts that you might need. Water and some energy bars or other food should also be part of your preparation, and don't forget a first aid kit, especially if you are riding in a group.

#### Pre-Ride Test

Prior to starting out, take a test ride with your fully loaded motorcycle through some familiar neighborhood roads to get a feel for the operation of your motorcycle. Be sure the suspension settings are correct, and that the side stand, footrests, and exhaust pipes don't scrape over bumps and in turns. Ensure the tank bag does not get in the way of the handlebars or restrict the steering. Also check the security of the load, so that your luggage does not hit you in the back under maximum braking.

You will also find that the performance of a fully loaded motorcycle will be different than what you are used to. Test the power when accelerating and be aware that it will be lower, increasing passing times and distances. Braking will also feel different, and stopping distances may increase.

#### **GROUP RIDING** Preparation

Preparing yourself for a group ride is as important as making sure your motorcycle is ready. Riding with a group requires an alert mind that is free from worries, distractions and stress. It also means riding free from the influence of alcohol or drugs. For some, even too much caffeine or prescription drugs can adversely affect concentration.

Prior to a long trip, it's a good idea to have your motorcycle serviced at your local dealership if you are not able to do the work yourself. A thorough preride check is a must. Use the T-CLOCS checklist as a reminder of the important components to check before you leave. Remember to consider such variables as passengers and extra weight from cargo that might require a change in tire pressure or suspension adjustment.

#### Plan

Before starting out, hold a rider's meeting to discuss the route, length of riding segments, rest stops and locations for fuel, meals and lodging. Make sure everyone knows the route. That way, if someone becomes separated, he or she won't have to hurry to keep from getting lost or making the wrong turn. Choose a lead rider and a sweep rider. These should be the most experienced riders of the group. The lead rider should look ahead for changes in road, traffic or weather conditions, and signal early so the word gets back in plenty of time to the other riders. The sweep rider is the last rider in the group, and sets the pace for the group. Place inexperienced riders just behind the leader. That ensures that they will not have to chase after the group, and the more experienced riders can watch them from the back.

The most important rules for group riding are: no competition, no passing of other riders and no tailgating. If a rider insists on riding faster than the group, allow him or her to go ahead to an agreed meeting point.

#### Hand signals

During the riders' meeting, review hand signals so all riders can communicate during the ride. A diagram of the most common hand signals is at the end of this manual.

### Follow those behind

During the ride, use your mirrors to keep an eye on the person behind and confirm that the group is staying together. If a rider falls behind, everyone should slow down to keep the group together.

#### **Keep Your Distance**

Maintain close ranks, but at the same time, maintain an adequate space cushion to allow each rider in the group time and distance to react to hazards. A close group takes up less space on the highway, is easier to see, and is less likely to become separated. This must, however, be done properly.


#### Do not Pair Up

Never ride directly alongside another rider in the same lane. There is no place to go if you have to maneuver to avoid a car or hazard in the roadway. Wait until you are both stopped to talk.

### **Staggered Formation**

This is the best way to keep the ranks close yet maintain an adequate space cushion. The group leader rides in the left side of the lane, and the second rider stays at least one second back and rides in the right side of the lane. The third maintains the left position of the lane, at least two seconds behind the first rider. The fourth rider should keep at least a two second distance from the second rider in the right side of the lane, and so on. This formation keeps the group close and permits each rider to maintain a safe distance from others ahead, behind and to the sides.

It is best to move to single file formation when riding in curves, turning, and entering or leaving freeways or highways.



# **RIDE WITHIN YOUR ABILITIES**

#### Intersections

Intersections present the highest risk for motorcyclists in a group. When making a left turn at an intersection with a left turn signal arrow, tighten the formation to allow as many riders through the intersection as possible. Make the turn single file – do not ride side-by-side. If not all riders get through the light, stop at a safe point ahead and wait. This will prevent riders from feeling pressured to speed up or run a red light.

# Interstate Highways and Freeways

A staggered formation is essential when riding on freeways and interstates. However, enter in single file and form up only after all riders have safely merged in traffic. The lead rider should move the group over at least one lane to prevent vehicles that are entering and exiting from disrupting your formation. In heavy traffic, resist the temptation to ride too close together. Maintain your minimum one-second, two-second staggered formation space cushion. When exiting, use a single file formation for better space cushion and time to react to conditions at the end of the off-ramp.

### Parking


When possible, park as a group, so everyone can get off their motorcycles more quickly. Avoid parking downhill or head-in, and if possible, park where you can pull through, making the arrival and departure smoother. Whenever possible, park so that the group can depart as a unit in single file.


# Passing in Formation

When the group wants to pass slow traffic on a freeway or interstate, the group may pass as a unit. On a

two-lane highway, riders in a staggered formation should pass one at a time.

- First, the lead rider should pull out and pass when it is safe. After passing the leader should return to the left position and continue riding at passing speed to open room for the next rider.
- Next, the second rider should move up to the left position in the lane and wait for a chance to safely pass. When passing be sure you have a clear view of oncoming traffic. Just because the lead rider passed, that does not mean that conditions have not changed and that it is still safe for other riders to pass. After passing the rider should return to the right position and open up room for the next rider.

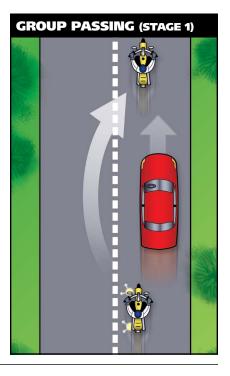

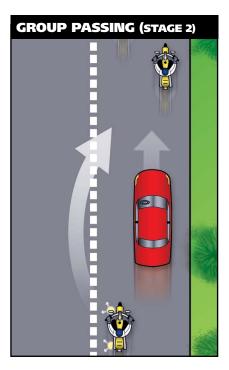

Some people suggest that the lead rider should move to the right side of the lane after passing the vehicle. This is not a good idea, since it might encourage the second rider to pass and cut back in before there is enough space cushion in front of the passed vehicle. It is simpler and safer to wait until there is enough room ahead of the passed vehicle to allow each rider to move into the same position held before the pass.

#### TEST YOURSELF

# When riding in a group, inexperienced riders should position themselves:

- A. Just behind the leader.
- B. In front of the group.
- C. At the tail end of the group.

Answer - page 50

13

#### **Ten Rules of Group Riding**

- Base the length of the route and segments on the ability of the least experienced rider.
- Take timely breaks to prevent loss of concentration and reduce fatigue.
- Adjust the pace through curves to the ability of the least experienced rider. If necessary, form two groups with different speeds.
- Do not tailgate or encourage the rider in front to speed. If you want to ride faster, ride ahead of the group.
- Keep adequate following distance and maintain a staggered formation.
- Do not pass in the group, except in the case of emergency.
- Place inexperienced riders just behind the leader so they can keep pace without riding faster than it is safe.
- When passing, be conscious of the traffic conditions and oncoming traffic. Even though the previous riders passed safely, it may not be safe for you.
- Maintain adequate time distance between riders, especially at intersections. This allows you to avoid hard braking.
- Check your mirrors frequently to ensure the group stays together.

# **BEING IN SHAPE TO RIDE**

Riding a motorcycle is a demanding and complex task. Skilled riders pay attention to the riding environment and to operating the motorcycle, identifying potential hazards, making good judgments and executing decisions quickly and skillfully. Your ability to perform and respond to changing road and traffic conditions is influenced by how fit and alert you are. Alcohol and drugs, more than any other factor, degrade your ability to think clearly and to ride safely. As little as one drink can have a significant effect on your performance.

Let's look at the risks involved in riding after drinking or using drugs. What to do to protect yourself and your fellow riders is also examined.

# WHY THIS INFORMATION IS IMPORTANT

Alcohol is a major contributor to motorcycle crashes, particularly fatal crashes. Studies show that nearly 40% of all riders killed in motorcycle crashes had been drinking. The rest had only a few drinks in their systems — enough to impair riding skills. In the past, drug levels have been harder to distinguish or have not been separated from drinking violations for the traffic records. But riding "under the influence" of either alcohol or drugs poses physical and legal hazards for every rider.

Drinking and drug use is as big a problem among motorcyclists as it is among automobile drivers. Motorcyclists, however, are more likely to be killed or severely injured in a crash. Injuries occur in 90% of motorcycle crashes and 33% of automobile crashes that involve abuse of substances. On a yearly basis, 2,000 motorcyclists are killed and about 50,000 seriously injured in this same type of crash. These statistics are too overwhelming to ignore.

By becoming knowledgeable about the effects of alcohol and drugs you will see that riding and substance abuse do not mix. Take positive steps to protect yourself and prevent others from injuring themselves.

#### ALCOHOL AND DRUGS IN MOTORCYCLE OPERATION

No one is immune to the effects of alcohol or drugs. Friends may brag about their ability to hold their liquor or perform better on drugs, but alcohol or drugs make them less able to think clearly and perform physical tasks skillfully. Judgment and the decision-making processes needed for vehicle operation are affected long before legal limitations are reached.

Many over-the-counter, prescription and illegal drugs have side effects that increase the risk of riding. It is difficult to accurately measure the involvement of particular drugs in motorcycle crashes. But we do know what effects various drugs have on the processes involved in riding a motorcycle. We also know that the combined effects of alcohol and drugs are more dangerous than either is alone.

### ALCOHOL IN THE BODY

Alcohol enters the bloodstream quickly. Unlike most foods and beverages, it does not need to be digested. Within minutes after being consumed, it reaches the brain and begins to affect the drinker. The major effect alcohol has is to slow down and impair bodily functions — both mental and physical. Whatever you do, you do less well after consuming alcohol.

### **Blood Alcohol Concentration**


Blood Alcohol Concentration or BAC is the amount of alcohol in relation to blood in the body. Generally, alcohol can be eliminated in the body at the rate of almost one drink per hour. But a variety of other factors may also influence the level of alcohol retained. The more alcohol in your blood, the greater the degree of impairment.

Three factors play a major part in determining BAC:

- The amount of alcohol you consume.
- How fast you drink.
- Your body weight.

Other factors also contribute to the way alcohol affects your system.

Your sex, physical condition and food intake are just a few that may cause your BAC level to be even higher. But the full effects of these are not completely known. Alcohol may still accumulate in your body even if you are drinking at a rate of one drink per hour. Abilities and judgment can be affected by that one drink.



A 12-ounce can of beer, a mixed drink with one shot (1.5 ounces) of liquor, and a 5-ounce glass of wine all contain the same amount of alcohol.

The faster you drink, the more alcohol accumulates in your body. If you drink two drinks in an hour, at the end of that hour, at least one drink will remain in your bloodstream.

Without taking into account any other factors, these examples illustrate why time is a critical factor when a rider decides to drink.

If you drink:

- Seven drinks over the span of three hours you would have at least four (7 - 3 = 4) drinks remaining in your system at the end of the three hours. You would need at least another four hours to eliminate the four remaining drinks before you consider riding.
- Four drinks over the span of two hours, you would have at least two (4 - 2 = 2) drinks remaining in your system at the end of the two hours. You would need at least another two hours to eliminate the two remaining drinks before you consider riding.

There are times when a larger person may not accumulate as high of a

concentration of alcohol for each drink consumed. They have more blood and other bodily fluids. But because of individual differences it is better not to take the chance that abilities and judgment have not been affected. Whether or not you are legally intoxicated is not the real issue. Impairment of judgment and skills begins well below the legal limit.

# BEING IN SHAPE TO RIDE

It is against the law to operate a motor vehicle while intoxicated. In Texas, a person with a Blood Alcohol Concentration (BAC) of .08 percent or more is legally intoxicated. Texas' Zero Tolerance for Minors law make it illegal for persons under 21 to operate a motor vehicle (motorcycle) with ANY detectable amount of alcohol in his or her system in a public place. Doing so constitutes a criminal offense of Driving Under the Influence of Alcohol by a Minor.

### **Consequences of a DWI Arrest**

Texas, like most other states, has strengthened DWI laws in recent years resulting in little tolerance for drinking and driving. Years ago, DWI offenders may have been required to pay a fine and attend an alcohol awareness class. Today a person arrested for DWI may experience the following on a first offense:

- The humiliation of an arrest, being fingerprinted and videotaped as you perform sobriety tests at the police station
- Spending the night in jail with violent offenders
- Posting a cash bond of \$500 or more or paying a bonding fee for jail release
- Having your motorcycle carried away by a wrecker and paying a towing fee to get the vehicle out of impound
- Explaining what happened to your family and employer and interrupting your life for court appearances and visits to a probation officer
- Paying legal fees to an attorney
- Undergoing an alcohol or drug dependency evaluation

#### Possible Consequences of a DWI Conviction

Every day someone is hurt or killed in a crash involving alcohol. Texas lawmakers have enacted DWI laws designed to protect the safety of the driving public and to keep our roadways safe. DWI laws help reduce traffic deaths and injuries and provide penalties for DWI offenders. The penalties include suspensions, fines, surcharges and jail time. The following list provides the possible consequences of a DWI conviction:

- Driver license and/or driving privilege suspended for up to two years under the Administrative License Revocation Program
- Driver License and/or driving privilege suspended by the court for up to one year for the first conviction and up to two years for subsequent convictions
- Fines up to \$2,000 for the first conviction and up to \$10,000 for subsequent convictions
- Court costs starting at \$70
- Annual surcharges for three years of \$1,000 for the first conviction, \$1,500 for subsequent convictions and \$2,000 if your BAC is at least twice the legal limit
- Jail sentence ranging from 72 hours to ten years or you may be eligible for probation for a first offense
- Weekly visits to your probation officer
- Community service requirements
- DWI education/rehabilitation program attendance
- Increased insurance rates and requirements
- Legal defense fees
- Driver and criminal record entries that may follow you for life

### **MINIMIZE THE RISKS**

Your ability to judge how well you are riding is affected first. Although you may be performing more and more poorly, you think you are doing better and better. The result is that you ride confidently, taking greater and greater risks. Minimize the risks of drinking and riding by taking steps before you drink. Control your drinking or control your riding.

#### Make an Intelligent Choice

**Don't Drink** — Once you start, your resistance becomes weaker.

Setting a limit or pacing yourself are poor alternatives at best. Your ability to exercise good judgment is one of the first things affected by alcohol. Even if you have tried to drink in moderation, you may not realize to what extent your skills have suffered from alcohol's fatiguing effects.

**Or Don't Ride** — If you haven't controlled your drinking, you must control your riding.

- Leave the motorcycle so you won't be tempted to ride. Arrange another way to get home.
- Wait If you exceed your limit, wait until your system eliminates the alcohol and its fatiguing effects.

#### TEST YOURSELF

14

#### If you wait one hour per drink for the alcohol to be eliminated from your body before riding:

- A. You cannot be arrested for drinking and riding.
- B. Your riding skills will not be affected.
- C. Side effects from the drinking may still remain.
- D. You will be okay as long as you ride slowly.

Answer - page 50

### STEP IN TO PROTECT FRIENDS

People who have had too much to drink are unable to make a responsible decision. It is up to others to step in and keep them from taking too great a risk. No one wants to do this — it is uncomfortable, embarrassing and thankless. You are rarely thanked for your efforts at the time. But the alternatives are often worse.

There are several ways to keep friends from hurting themselves:

- Arrange a safe ride Provide alternative ways for them to get home.
- Slow the pace of drinking Involve them in other activities.
- Keep them there Use any excuse to keep them from getting on their motorcycle. Serve them food and coffee to pass the time. Explain your concerns for their risks of getting arrested or hurt or hurting someone else. Take their key, if you can.
- Get friends involved Use peer pressure from a group of friends to intervene.

It helps to enlist support from others when you decide to step in. The more people on your side, the easier it is to be firm and the harder it is for the rider to resist. While you may not be thanked at the time, you will never have to say, "If only I had..."

# BEING IN SHAPE TO RIDE FATIGUE

Riding a motorcycle is more tiring than driving a car. On a long trip, you'll tire sooner than you would in a car. Avoid riding when tired. Fatigue can affect your control of the motorcycle.

- Protect yourself from the elements — Wind, cold, and rain make you tire quickly. Dress warmly. A windshield is worth its cost if you plan to ride long distances.
- Limit your distance Experienced riders seldom try to ride more than about six hours a day.
- Take frequent rest breaks Stop and get off the motorcycle at least every two hours.
- **Don't drink or use drugs** Artificial stimulants often result in extreme fatigue or depression when they start to wear off. Riders are unable to concentrate on the task at hand.

# EARNING YOUR LICENSE

Safe riding requires knowledge and skill. Licensing tests are the best measurement of the skills necessary to operate safely in traffic. Assessing your own skills is not enough. People often overestimate their own abilities. It's even harder for friends and relatives to be totally honest about your skills. Licensing exams are designed to be scored more objectively.

To earn your license, you must pass a knowledge test and an on-cycle skill test. Knowledge test questions are based on two and three-wheel information, practices and ideas from this manual. They require that you know and understand road rules and safe riding practices. An on-cycle skill test will either be conducted in an actual traffic environment or in a controlled, off-street area.

#### Knowledge Test

(Sample Questions)

#### 1. It is MOST important to flash your brake light when:

- A. Someone is following too closely.
- B. You will be slowing suddenly.
- C. There is a stop sign ahead.
- D. Your signals are not working.

#### 2. The FRONT brake supplies how much of the potential stopping power?


- A. About 25%.
- B. About 50%.
- C. About 70%.
- D. All of the stopping power.

#### 3. To swerve correctly:

- A. Shift your weight quickly.
- B. Turn the handlebars quickly.
- C. Press the handgrip in the direction of the turn.
- D. Press the handgrip in the opposite direction of the turn.

#### 4. If a tire goes flat while riding and you must stop, it is usually best to:

- A. Relax on the handgrips.
- B. Shift your weight toward the good tire.
- C. Brake on the good tire and steer to the side of the road.
- D. Use both brakes and stop quickly.
- 5. The car below is waiting to enter the intersection. It is best to:
  - A. Make eye contact with the driver.
  - B. Reduce speed and be ready to react.
  - C. Maintain speed and position.
  - D. Maintain speed and move right.



# EARNING YOUR LICENSE

#### **On-Motorcycle Skill Test**

Basic vehicle control and crash-avoidance skills are included in on-motorcycle tests to determine your ability to handle normal and hazardous traffic situations.

You may be tested for your ability to:

- Know your motorcycle and your riding limits.
- Accelerate, brake and turn safely.
- See, be seen and communicate with others.
- Adjust speed and position to the traffic situation.
- Stop, turn and swerve quickly.
- Make critical decisions and carry them out.

Examiners may score on factors related to safety such as:

- Selecting safe speeds to perform maneuvers.
- Choosing the correct path and staying within boundaries.
- Completing normal and quick stops.
- Completing normal and quick turns or swerves.

Answe	rs to Tes	t Yoursel	f (previo	us pages)	)	
1-C,	2-D,	3-D,	4-A,	5-B,	6-C,	7-D
8-D,	9-C,	10-C,	11-D,	12-A,	13-A,	14-C
Answe	rs to Kn	owledge <sup>·</sup>	Test (pag	je 49):		
1-B,	2-C,	3-C,	4-C,	5-B		

# Diagrams and drawings used in this manual are for reference only and are not to correct scale for size of vehicles and distances.

# THREE-WHEEL SUPPLEMENT

### SUPPLEMENTARY INFORMATION FOR THREE-WHEEL MOTORCYCLES

Many states require a separate license endorsement to operate a three-wheel motorcycle. This requires the rider to pass both a written and a skills test. The purpose of this supplement is to help prepare riders to complete the written exam for a two and three-wheel motorcycle license. This information is provided in addition to that offered in the first part of this Motorcycle Operator Manual (MOM), so when preparing to take the written test, begin by reading the information on two-wheel motorcycles thoroughly. It provides information on safe operation of your motorcycle in traffic. This supplement contains information specific to the safe operation of a three-wheel motorcycle, including both three-track motorcycles and motorcycles with sidecars.

# **KNOW YOUR VEHICLE**

There are many types of three-wheel motorcycles available on the market today. Requirements for licensing three-wheel motorcycles vary by state. In general, three-wheel motorcycles will have the following characteristics:

- 1. Three wheels leaving two or three separate tracks during straight line operation.
- **2. Motorcycle-based** conversion or design with:
  - Handlebar steering
  - Motorcycle-type controls with the standard layout. Convenience alterations like a single brake pedal or lever control, automatic clutch, or automatic transmission.

- Saddle seating
  - Seating in which the rider/ passenger straddles the vehicle.
  - If designed for a passenger, the passenger must be seated behind the operator (or in a separate passenger compartment in the case of a motorcycle with sidecar).
- **3. Turning** diameter of the vehicle at its widest point must be less than 40'.
- **4. The vehicle** meets all applicable federal on-road vehicle standards.

Refer to your local Department of Motor Vehicles agency for exact regulations regarding:

- Automotive hybrids or automotive conversions
- Vehicles with automotive controls or seating
- Vehicles with front or rear mounted engines (engines must be mounted mid-frame below the rider to be considered motorcyclebased)
- Vehicles with enclosed or semienclosed riding compartments
- Motorcycles or scooters with two close-set wheels in front (contact patches less than 18.1 inches apart) that lean and maneuver like standard, single-track, two-wheel motorcycles

or


• **Vehicles** with any other departure from the above standards.

# THREE-WHEEL SUPPLEMENT

### Three-Wheel Motorcycle Designs

Three-wheel motorcycle designs vary among manufacturers. Unlike traditional motorcycles, which are considered single-track motorcycles, three-wheel motorcycles could be either dual or triple track design. Dual track vehicles are motorcycles with sidecars, while triple track motorcycles can be configured either with dual front wheels or dual rear wheels.

#### MOTORCYCLE AND THREE-WHEEL MOTORCYCLE DESIGNS



### The Right Motorcycle for You

Make sure your three-wheel motorcycle or sidecar-equipped motorcycle is right for you. You should be able to comfortably reach and operate all of the controls, and be able to complete full turns using the handlebars without excessive upper body movements that could jeopardize stability and control.

### **Borrowing and Lending**

Borrowers and lenders, beware.

Crashes are fairly common among beginning operators, especially in the first months of riding. Operating an unfamiliar motorcycle adds to the problem. If you borrow a three-wheel motorcycle or motorcycle with sidecar, get familiar with it in a controlled area first. If you lend your three-wheel motorcycle or motorcycle with sidecar to friends, make sure they are licensed and know how to ride before you allow them to operate in traffic. Such motorcycles operate very differently than two-wheel motorcycles.

No matter how experienced you may be, be extra careful on any vehicle that is unfamiliar or new to you.

#### Get Familiar with Motorcycle Controls

Be sure you are familiar with the controls of the three-wheel motorcycle or motorcycle with a sidecar before attempting to operate it on any highway, since some controls may differ from those found on other motorcycles. This is especially important if you are riding on a borrowed motorcycle. Before beginning the ride:

- Make all the checks you would on your own motorcycle.
- Familiarize yourself with all controls, such as the turn signals, horn, headlight switch, fuel control valve, and cut-off switch. Locate and operate these items without having to search for them.
- **Operate all the controls** before you start riding. Know the gearshift pattern and operate the throttle, clutch and brakes a few


times. Controls react differently on different motorcycles, and exact locations of controls may vary slightly. Additionally, some motorcycle conversions may be equipped with a single brake pedal or lever control, automatic clutch, or automatic transmission.

• As you begin to ride, start out slowly and carefully and be aware of your surroundings. Accelerate gently, take turns a little more slowly, and leave extra room for stopping.

### BASIC VEHICLE CONTROL Steering & Tip

Three-wheel motorcycles handle differently than two-wheel motorcycles. With three wheels on the ground, they are naturally more stable than a two-wheel motorcycle. They also steer differently. Because conventional three-wheel motorcycles cannot lean, they cannot countersteer. Instead, the front wheel is pointed in the direction the rider wants the motorcycle to go.

Under some conditions during the operation of a three-wheel motorcycle, it is possible to have only two wheels in contact with the road surface. This could occur during turning or tight maneuvers whenever enough weight



is transferred outside of what are called tip-over lines. This tendency requires careful load and passenger positioning inside the tip-over lines to help maintain maximum stability.

### **Body Position**

As with any motor vehicle, operator position is important for control and for reducing or preventing fatigue. The operator should be able to reach both handgrips comfortably, since more handlebar movement is necessary than when riding a two-wheel motorcycle. While it is not necessary for the rider of a three-wheel motorcycle to move drastically during operation, shifting weight in the direction of the turn can improve control.

#### Braking

On a motorcycle with a sidecar, during braking in a sharp turn, the sidecar wheel may lift off the ground. Motorcycle and sidecar tires have limited traction or grip on the road surface, and traction is greater when the motorcycle is rolling, not skidding or slipping. During turning, some of the available tire traction is used for cornering, so less is available for stopping. Thus, a skid can occur if you brake too hard.

#### Turning

The tendency of the rear inside wheel to lift during turning is greater with increased speed and tighter curve radii. During a turn, inertia causes the center of gravity of the motorcycle to shift sideways and outward toward the tip-over line. The reduced weight over the opposite side wheel can cause it to lift slightly.

The weight of a three-track motorcycle is distributed almost equally between the two front or two rear wheels. These motorcycles handle the same in left and right hand turns.

# THREE-WHEEL SUPPLEMENT

# When turning a three-track motorcycle:

- Approach a turn at speed with your head up, and look through the turn.
- **Concentrate** on pointing the front wheel/wheels in the direction you want the motorcycle to go.
- **Roll off** the throttle before entering the turn.
- Apply the brakes enough to slow the motorcycle to a speed at which you can ride safely through the turn, then release the brakes before the turn.
- **Slightly lean** your upper body in the direction you intend to turn.
- **Steer** the front wheel/wheels toward the turn.
- Roll on the throttle to pull the motorcycle through the turn.

On the other hand, because the center of gravity of a motorcycle with sidecar is close to the motorcycle itself, the behavior of the vehicle when turning right and when turning left is quite different.

During a right turn, a slight sideways movement of the center of gravity creates a greater tendency for the sidecar wheel to lift. The lift will be greater if the sidecar is empty or lightly loaded.

# When turning right on a motorcycle with sidecar:

- Anticipate the degree of turn required.
- **Reduce speed** before entering the curve by downshifting or braking.
- **Slightly lean** your upper body in the direction you intend to turn.
- Maintain speed as you enter the curve.
- Accelerate gradually as you exit the curve.

During a left hand turn, the sidecar acts as a stabilizer, so the sidecar wheel stays on the ground. However, if the turn is taken too sharply or at too high a rate of speed, there is a tendency for the motorcycle rear suspension to extend, and this may cause the rear wheel of the motorcycle to lift off the ground.

# When turning left on a motorcycle with sidecar:

- **Reduce** speed prior to entering the turn
- **Apply** more pressure on the rear brake then on the front

#### Hills

When riding uphill on a three-wheel motorcycle or motorcycle with a sidecar, some weight will shift to the rear, causing the front of the motorcycle to become lighter. This weight shift reduces the traction on the front tire/tires for steering and tire grip.

When riding downhill, gravity increases the amount of braking force required to slow or stop the motorcycle. It is important, therefore, to begin slowing earlier for cornering and stopping.

#### Lane Position

The track of the dual wheels of a three-wheel motorcycle or motorcycle with a sidecar is almost the same width as some automobiles. Unlike a motorcycle, you are limited, therefore, in lane positioning. Keep toward the center of the lane to be sure the track of the dual wheels does not cross the painted lines into opposing traffic. Riding too far to the right could cause loss of traction if the tire leaves the pavement.

Lane positioning when riding in groups is also an important consideration. You will not be able to use a staggered formation, such as you would when riding two-wheeled motorcycles. Ride single file and always maintain a safe margin, two seconds minimum, between vehicles.

#### Parking at the Roadside

Because of the limitations on mobility and motorcycle length, it is not practical to park your motorcycle at a 90 degree angle with your rear wheel touching the curb, as you would with a two-wheel motorcycle. Position your motorcycle in a parking space so you are parked parallel to the curb and set the parking brake. Some three-wheel motorcycles have reverse, so you can more easily maneuver into a parking space designed for an automobile. Parking parallel to the curb will facilitate pulling away from the curb and entering the lanes of traffic.

#### Acceleration and Deceleration

A three-wheel motorcycle with two drive wheels tends to be much more stable during acceleration and braking than a motorcycle with a sidecar. Attaching a sidecar to your motorcycle adds a non-powered, off-centered mass of weight. So, during acceleration, the sidecar will feel as though it is lagging behind you, causing the vehicle to feel as though it is being steered to the right. During deceleration or braking, the momentum of the sidecar continues to carry it forward, giving the feeling that the sidecar is trying to pass you, making the motorcycle feel as though it is being steered left.

- On acceleration, compensate for this tendency by steering slightly in the opposite direction from the sidecar.
- **On deceleration**, compensate for this tendency by steering slightly in the direction of the sidecar. You can also pull in the clutch when braking.

#### Swerving


A quick stop may not always be sufficient to avoid an obstacle in your path, even if you properly apply both brakes. Sometimes the only way to avoid a collision is to swerve. A swerve is any sudden change of direction. It can be two quick turns or a rapid shift to the side when maneuvering the motorcycle. Often, there is not much time to adjust your body position.

A three-wheel motorcycle or motorcycle with sidecar is not as maneuverable as a two-wheel motorcycle, so plan well ahead to avoid the need for any sudden turns or swerving. If braking is required, brake either before or after the swerve, never while swerving.

#### **Cornering & Curves**

The cornering characteristics of a three-wheel motorcycle or motorcycle with a sidecar differ from those of a motorcycle. Even with three wheels on the ground, a sidecar can tip over if it is being turned too sharply or is going too fast for a corner. Therefore, it is best to always slow before entering a corner.

# THREE-WHEEL SUPPLEMENT



The best path to follow in the curve may not be the one that follows the curve of the road. Following the center of the lane may actually increase the tip over forces. Check opposing traffic carefully, and if safe, enter the curve toward the outside of your lane. This increases your line of sight through the curve and reduces the effective radius of the curve. As you turn, move toward the inside of the curve, and as you pass the center, move to the outside to exit, always remembering to stay in your lane.

#### CARRYING PASSENGERS AND CARGO

Three-wheel motorcycles are designed to carry passengers and cargo, but always be sure not to exceed the tire or motorcycle loading capacity. The extra weight could change the handling characteristics of the vehicle slightly, so you must give some thought to where the loads are positioned. Many three-track motorcycles will have built-in storage compartments for cargo, either in front of, or behind the rider. On these motorcycles, center the load and keep it low in the storage areas so it is positioned within the tip-over lines and balanced side-to-side. If a passenger is being carried, the passenger will sit directly behind the rider.

On a motorcycle with a sidecar, the best place for a passenger is in the sidecar. Never put a single passenger on the saddle; the added weight on the tip-over-line will increase the instability of the motorcycle. While a second passenger can be carried on the seat behind the rider, the heavier passenger should always be in the sidecar.

The passenger sitting behind the rider should sit upright at all times. It is not necessary for the passenger to lean into curves with the rider.

When carrying loads in a sidecar, secure the load firmly in place, since if the load shifts, handling will be affected. Loads should be distributed toward the rear of the sidecar to reduce tipping of the nose of the sidecar in the event of a sudden left turn.

When loaded, you may find performance is reduced and that stopping distances are longer, so allow a little extra distance. The addition of a sidecar passenger will greatly improve stability, and right hand turns can be made at a slightly higher speed. Turning left, however, will require more turning force.

Local rate war to detail and material and mater				e-Ride	lnspecti	T-CLOCS: Pre-Ride Inspection Checklist		
Instrumentation     Construmentation     Construmentation </th <th>T-CLOCS ITEM</th> <th>WHAT TO CHECK</th> <th></th> <th>CHECK-(</th> <th>1</th> <th>CS ITEM WHAT TO C</th> <th></th> <th>OFF</th>	T-CLOCS ITEM	WHAT TO CHECK		CHECK-(	1	CS ITEM WHAT TO C		OFF
Image: branch of the structure of	T-TIRES & WHE				C-C	HASSIS		
Attention     Attention <t< th=""><th>Tires</th><th>Condition</th><th>Tread depth, wear, weathering evenly seated, bulges, embedded objects.</th><th>Front</th><th></th><th></th><th></th><th></th></t<>	Tires	Condition	Tread depth, wear, weathering evenly seated, bulges, embedded objects.	Front				
victo     Attentional control     Number of the contro     Number of the		Air Pressure	Check when cold, adjust to load.	Front	Rear	Steering-Head B		
Image: brown of the state of the s	Wheels	Spokes	Bent, broken, missing, tension, check at top of wheel: "ing" = 0K — "thud" = 1 cose spoke	Front	Rear	Swingarm Bus Rearings		
max     contractivity control strating control     max     strating control stratistend contro strating control stratistrating control strating cont		Cast	Cracks, dents.	Front		+	Smooth travel, equal air pressure/damping, anti-dive settings.	Right
main     main <th< td=""><td></td><td>Rims</td><td>Out of nound/true = 5mm. Spin wheel, index against stationary pointer.</td><td>Front</td><td></td><td></td><td>Smooth travel, equal pre-load/air pressure/damping settings, linkage moves freely and is lubricated. Left</td><td>Right</td></th<>		Rims	Out of nound/true = 5mm. Spin wheel, index against stationary pointer.	Front			Smooth travel, equal pre-load/air pressure/damping settings, linkage moves freely and is lubricated. Left	Right
Tartion     Construction     Exploration     Fromt     From     From     Fromt <td></td> <td>Bearings</td> <td>Grab top and bottom of tire and flex. No freeplay (kild() between hub and axie, no grow/ when spinning.</td> <td>Front</td> <td></td> <td></td> <td>Check at tightest point.</td> <td>,</td>		Bearings	Grab top and bottom of tire and flex. No freeplay (kild() between hub and axie, no grow/ when spinning.	Front			Check at tightest point.	,
Interface     Explore     Free control     Explore	-	26415	Lracked, tur or torn, excessive grease on outside, reconsin-brown around outside.	FIOIL	Rear	Lubricatio		
Condition     Bolive, but, cacked, mount tight, bial ends on handhate levers, proper adjustment.       Price     Universed.     Enderse     Enderse     Enderse       Price     Enderse     Enderse, but gest bink, fund and the ends on handhate levers, proper adjustment.     Enderse       Indicition     Enderse     Enderse     Enderse     Enderse     Enderse       Indication     Condition     Enderse     Enderse     Enderse     Enderse       Indication     Condition     Enderse     Enderse     Enderse     Enderse       Condition     Enderse     Enderse     Enderse     Enderse     Enderse       Condition     Enderse     Enderse     Enderse     Enderse     Enderse       Condition     Enderse     Enderse     Enderse     Enderse     Enderse       Condition     Condition     Enderse     Enderse     Enderse     Enderse       Ann     Enderse     Enderse     Enderse     Enderse     Enderse       Condition     Condition     Enderse     Enderse     Enderse     Enderse <t< td=""><td>brakes</td><td>Function</td><td>ta dri brake alone keeps bike trom miling.</td><td>Front</td><td>Kear</td><td>Sprodiets</td><td>Teeth not hooked, se curely mounted</td><td></td></t<>	brakes	Function	ta dri brake alone keeps bike trom miling.	Front	Kear	Sprodiets	Teeth not hooked, se curely mounted	
Endersity     Endersity <t< td=""><td>C-CUN IRULS</td><td></td><td></td><td></td><td>Faste</td><td></td><td></td><td></td></t<>	C-CUN IRULS				Faste			
Image:     Final State     Final State <t< td=""><td>Pedal</td><td>Condition</td><td></td><td></td><td></td><td>Clips</td><td>Broken, missing</td><td></td></t<>	Pedal	Condition				Clips	Broken, missing	
Expension     Final Production     Final Production     Final Production     Final Production       Inclusion     Condition     Final Production     Condition     Final Production     Final Production       Inclusion     Condition     Condition     Condition     Final Production     Final Production       Inclusion     Detertion     Condition     Final Production     Final Production     Final Production       Condition     Final Production     Final Production     Final Production     Final Production       Condition     Final Production     Final Production     Final Production     Final Production       Condition     Final Production     Final Production     Final Production     Final Production       Condition     Condition     Condition     Condition     Final Production     Final Production       Condition     Condition     Condition     Condition     Final Production     Final Production       Ann     Allori Vieture Production Production     Final Production     Final Production     Final Production       Condition     Condition     Condidion     Condidion     Fi		Pwots	Lubricated.			Cotter Pin	╞	
Including     Control     Inclusion     Inclusion <t< td=""><td>Cables</td><td>Condition</td><td>Fray ing kinks, lubrication: ends and interior. Na interferonce or an illing at transition back current in an device and or with currents in device</td><td></td><td>S-S</td><td>ANDS</td><td></td><td></td></t<>	Cables	Condition	Fray ing kinks, lubrication: ends and interior. Na interferonce or an illing at transition back current in an device and or with currents in device		S-S	ANDS		
monitoring     total concernsion     total concernsi     total concoconconcernsion	Horor	Condition	rumiterieterie or puming activering ireau, suspension, no analpangres, mae supporta in prace.		Cente			
Description     Interfactore of pairs     Interfactore of pairs <thinterfactore of="" pairs<="" th="">     Interfactore of pairs     Interfactore     Interfactore<td>Sason</td><td>Douting</td><td>uus, uaavo, uauvo, pauges, citainiig, ueteriviauoni. Na istoofeenone ee niillisee tertooitee haard arroomerine ee daamaande haan arroomerine ja al oo</td><td></td><td></td><td>Retention</td><td><math>\vdash</math></td><td></td></thinterfactore>	Sason	Douting	uus, uaavo, uauvo, pauges, citainiig, ueteriviauoni. Na istoofeenone ee niillisee tertooitee haard arroomerine ee daamaande haan arroomerine ja al oo			Retention	$\vdash$	
Appendix     Terminals, clean antilight effectively tele form security.       Image: Condition     Terminals, clean antilight effectively tele form security.     Image: Condition     Terminals, clean antilight effectively tele form security.       Image: Condition     Text in the effective of tele control of a path of the effective of tele control of a path of the effective of tele control of a path of the effective of tele control of a path of the effective of tele control of te	Throttlo	Anutin A	rommenterence on pumming at steering meads, suspensionly no single angles, more supports in prace.		Side		$\vdash$	
Condition     Terminals: clana at fight, detrafyte breft, ledd downscurely.       Vent (take     Net kinket, crunde propert/, certa proget, certa proget.     Imminist, clana at fight, detrafyte breft, certa proget.     Imminist, clana at fight, certa proget.     Imminist, clana at fight, certa proget.     Imminist, clana at fight.     Imminist, clana at fight, certa proget.     Imminist, clana at fight.     Imminist.     Imminist. <td>I nrottle</td> <td>Operation</td> <td>wows treety, shaps dosed, no rewing when handledars are turned.</td> <td></td> <td></td> <td>Retention</td> <td><math>\left  \right </math></td> <td>Γ</td>	I nrottle	Operation	wows treety, shaps dosed, no rewing when handledars are turned.			Retention	$\left  \right $	Γ
Endedice     Terminal: clean and tight, electroyie level, held downscurely.     Image: clean and tight, electroyie level, held downscurely.       Image: clean and tight relevance.     Condition     Condition     Condition     Image: clean and tight relevance.       Image: clean and tight relevance.     Condition     Condition     Condition     Image: clean and tight relevance.       Image: clean and tight relevance.     Condition     Condition     Condition     Image: clean and tight relevance.       Image: clean and tight relevance.     Condition     Condition     Condition     Image: clean and tight relevance.       Image: clean and tight relevance.     Condition     Condition     Condition     Condition     Image: clean and tight relevance.       Image: clean and tight relevance.     Condition     Condition     Condition     Image: clean and tight relevance.     Image: clean and tight relevance.       Image: clean and trace clean and trace and clean and clean and clean place.     Image: clean and clean and clean and clean and clean place.     Image: clean and clean and clean place.       Image: clean and clean and clean and clean place.     Image: clean and clean and clean place.     Image: clean and clean and clean place.     Image: clean and clean place.       Image: clean and clean and clean place	L-LIGHIS				]	-		]
Neutrolise     Neutrolise     Control     Neutrolise     Image       Alm     Holpman (white), monting and adjuttment system,     Image     Image     Image       Alm     Holpman (white)     Holpman (white)     Holpman (white)     Image     Image       Operation     Holpman (white)     Keto is concrety,     Image     Image     Image       Operation     Condition     Consistence     Constrained     Image     Image       Operation     Condition     Constrained     Ann     Image     Image       Operation     Condition     Constrained     Environe     Image     Image       Ann     Algos when search on the constrained and some (pints).     Environe     Image     Image       Ann     Algos when search on the constrained and some (pints).     Condition     Condition     Image     Image       Ann     Algos when search on the constrained and some (pints).     Condition     Condition     Image     Image       Ann     Ann     Algos when search on the constrained and some (pints).     Image     Image     Image <t< td=""><td>Battery</td><td>Condition</td><td>Terminaks; clean and tight, electrolyte le vel, held down securely.</td><td></td><td></td><td></td><td></td><td></td></t<>	Battery	Condition	Terminaks; clean and tight, electrolyte le vel, held down securely.					
Condition     Condition     Condition     Condition     Condition     Condition     International and adjustment system.       Poention     Heam (Web metal equipited).     Excisi elevant and split.     Excisi elevant and split.     Excisi elevant and split.       Condition     Condition     Condition     Condition     Excisi elevant and split.     Excisi elevant and split.       Heam (Web metal and split.     Condition     Condition     Condition     Excisi elevant and split.     Excisi elevant and split.       Adm     Adm     Adm     Adm     Adm     Excisi elevant and split.		VentTube	Not kinked, routed properly, not plugged.					
Alm     Height and right left     Image: Fee Almoniton Metanoperation.     Image: Fee Almoniton Metanoperation.       Condition     Condition     Condition     Condition     Feroal Almoniton Metanoperation.       Dependion     Actionate spontent brack.clean and print to decide front trade application.     Feroal Almoniton Metanoperation.     Feroal Almoniton       Operation     Condition     Condition     Condition     Feroal Almoniton Metanoperation.     Feroal Almoniton       Almon     Algoriton Heaving-force and formed prints.     Almoniton     Feroal Almoniton	Headlamp	Condition	Cracks, reflector, mounting and adjustment system.					
Image: Minimum Semigration     Himeline     Contraction     Himeline     Final Minimum Semigration       Potention     Kent sequent right.     Minimum Semigration     Final Minimum Semigration     Final Minimum Semigration       Operation     Kent sequent right.     Minimum Semigration     Final Minim Semigration     Final Minimum Semigration		Aim	Height and right/left.					
Condition     Cockxi chan and tight.     Condition     Cockxi chan and tight.       Operation     Activates upon from thake/not hake application.     Enorthyt     Front type       Operation     Enorthyt     Enorthyt     Front type     Enorthyt     Front type       Operation     Condition     Cockxi chan, typit mounts and some! plant.     Enorthyt     Front type       Ann     Agrist reference of the condition     Cockxi, chan, typit mounts and some! plant.     Enorthyt     Enorthyt     Enorthyt       Ann     Agrist reference of the condition     Condition     Condition     Enorthyt     Enorthyt       Ann     Ann     Ann     Agrist reference or enderation.     Enorthyt     Enorthyt       Ann     Enorthyt     Enorthyt mounts and some! plant, condition.     Enorthyt     Enorthyt     Enorthyt       Ann     Enorthyt     Enorthyt mounts and some! plant, condition.     Enorthyt     Enorthyt     Enorthyt       Ann     Enorthyte     Enorthytes enorthyt mounts and tool plact.     Enorthytes     Enorthytes       Ann     Enorthytes     Enorthytes     Enorthytes     Enorthytes     E		Operation	Hi beam /low beam operation.		Ride	-'s Name	Rlood Tyne	
Image: Control in the contr	Taillamp/	Condition	Cracks, clean and tight.					1
als protection p	brake lamp	Operation	Activates upon front brake /rear brake application.			tip and facility for the		
Operation     Final contectly.     Rearregist       Incomption     Conditions     Conditions     Conditions     Event     Rearregist       Ann     Ann     Annum context data with phitments and swhelipents.     P     P     P     P       Ann     Annum context data with phitments and swhelipents.     P	Turn signals			Front left Fr		gies/iviedical condit	00S	
Confliction     Conduction     Conduction     Conduction     Conduction     Conduction     Main     Main value val		Operation	Hashes correctly.	Rear left Re		or's Name/Phone		
Aim     Adjurt veloci rotation bile.     Adjurt veloci rotation bile.     Adjurt veloci rotation bile.     Adjurt veloci rotation     Adjurt rotation     Adjurt rotation <t< td=""><td>Mirrors</td><td>Condition</td><td>Cracks, clean, tight mounts and switel joints.</td><td></td><td></td><td></td><td></td><td></td></t<>	Mirrors	Condition	Cracks, clean, tight mounts and switel joints.					
Gindlein     Cracked, balken, steunely monnetd, occeside condensition,     Condition     Condition     Fraying challen, steunely monnetd, occeside condensition,       Housing     Fraying challen, steunely monnetd, occeside condensition,     Fraying challen, steunely monnetd, occeside condensition,     Mon       Fraying challen,     Fraying challen, steunely monted or supersion, wre forme and then place, connectors tight, clean.     Mon     Mon       Fraying challen,     Transmission, and forme y tard on level ground, dipatick, sight glass.     Mon     Mon     Mon       Monder, Dial Revensi and scient shaft.     Mon and remers rand on level ground, dipatick, sight glass.     Mon     Mon     Mon       Monder, Flaid     Baake, chath, merenviar suph glass.     Mon     Mon     Mon     Mon       Monder, Flaid     Baake, chath, merenviar suph glass.     Mon		Aim	Adjust when seated on bike.		Cvcle	Insurer Name/Phor	٩	
Condition     Fraying Culting, Instantion,     Fraying Culting, Instantion,     Production interference or pulling at Steeling hourd or supervision, whe form and then in place, connectors tight, clean.     Production interference or pulling at Steeling hourd, sight glass,       Engine OI     Creat warm on content's rand on level ground, sight glass,     Production interference or pulling at Steeling hourd, sight glass,     Production interference or pulling at Steeling hourd, sight glass,     Production interference or pulling at Steeling hourd, sight glass,     Production interference or pulling at Steeling hourd, sight glass,     Production interference or pulling at Steeling hourd, sight glass,     Production interference or pulling at Steeling hourd, sight glass,     Production interference or pulling plass,     Production interference or plang plass,     Production interferen	Lenses & Reflectors	Condition	Cracked, braken, securely mounted, excessive condensation.					
Routing     Protoked, an liter ference er palling at citering bedru sugrension, wire home and lier in place, connection right, dean.       Instantion     Ergene Clin     Check warm on center stand on level ground, dipstick, sight glass.       Hybrid differen Clii     Check warm on center stand on level ground, dipstick, sight glass.     Englese Clii       Hybrid differen Clii     Transmission, rear chine, abdrt.     Englese Clii     Englese Clii       Hydrauli Chinid     Reace, cluich, reservie ar gling glass.     Englese Clii     Englese Clii       Codiant     Rearewin and consolint recervin tank.     Codiant     Englese Clii     Englese Clii       Filed     Take or group.     Godiant     Englese Clii     Englese Clii     Englese Clii     Englese Clii       Filed     Take or group.     Godiant     Englese Clii     Englese Clii     Englese Clii     Englese Clii       Filed     Englese Clii     Godiant     Englese Clii     Englese Clii     Englese Clii     Englese Clii       Filed     Englese Clii     Godiant     Englese Clii     Englese Clii     Englese Clii     Englese Clii       Filed     Englese Clii     Godiant     Englese Clii     Englese Cl	Wiring	Condition	Fraying chafing, insulation.				Contact this person if rider is injured	
Egypte Ol Check warm on center stand on level ground, dipstick, splitt gass.   Stand globace Oli, Transmission, new drow and constructions and the stand on level ground, dipstick, splitt gass.   Manual Chinki Elevence and the construction of the stand on level ground, dipstick, splitt gass.   Manual Chinki Elevence and the construction of the stand on level ground, dipstick, splitt gass.   Manual Chinki Elevence and the construction of the stand on level ground.   Keel Internet and the construction of the stand on level ground.   Keel Internet and the construction of the stand on level ground.   Stand State Linkin Groups, telis. Engine Cli   Gasters, Londongs, telis. Engine Cli   Manual Chinki Hand Groups, telis.   Manual Chinki Hand Groups, telis.   Manual Chinki Hand Groups, telis.   Manual Chinki Heater, stands, the stand on level, the stands, the stand on level stands.   Manual Chinki Heater, stands, the		Routing	Pinched, no interference or pulling at steering head or suspension, wire looms and thein place, connectors tight, dean.					
Engine Oli     Clevic variant center stand on kivel ground, stjorti galss.     Mediate center     Mediatecent     Mediatecent     Medi	0-01							
Physical Column     Transmission, reactine, shaft.       Hydradir Fluid     Beaker, cluth, reserving ex signt gaiss.       Hydradir Fluid     Beaker, cluth, reserving ex signt gaiss.       Gold ant     Reverb and re coulant recovery tank.       Fluid     Beaker, cluth, reserving ex signt gaiss.       Fluid     Reverb and re coulant recovery tank.       Fluid     Goldes, hourings, stelk.       Hydradir Fluid     House, mouter cylindres, callipers.       Hydradir Fluid     House, mouter cylindres, callipers.       Hydradir Fluid     House, mouter cylindres, callipers.       Flaid     Reve: tanks, fiftings, piler.       Flaid     Reve: tanks, fiftings, piler.	Levels	Engine Oil			Nam	9	Home Phone	I
Hydrauk Fluid     Backer, clutch, network ar sight glut.     Hydrauk Fluid     Backer, clutch, network and or coultant recovery tark.     Could show and or coultant recovery tark.     Environment of tark and or coultant recovery tark.     Environment of tarks.		Hypoid Gear Oil, Shaft Drive	Transmission, rear drive, shaft.			i		
God Batt     Recervition     Condition     Recervition     Condition		Hydraulic Fluid	Brakes, clutch, reservoir or sight glass.		Mor	Chone	Cell Phone	
Food Tank or gauge.   Enter Oil Gadets, housings, sols.   Enter Oil Gadets, housings, sols.   Methadican Oil Gadets, resh, housine, realizer, solar housine, radiator, housine, radiator		Coolant						
Engine OI     Godet, Nourilloy, sols     Engine		Fuel	Tank or gauge.					
Galdets, seek, breathers. Eastern   Hock, makine cymbrates, caliblers. Eastern   Raddaue, Jones, tantis, fritings, pipes. Lines, fried valle, carbs.	Leaks	Engine Oil	Gaskets, housings, seals.					
Hoos, maker syndros, calipers, Rad auc, hoos, tanks, fittings pipes, Lines, food valke, cards.		Hypoid Gear Oil, Shaft Drive	Gaskets, seak, breathers.		4	arger version	of this form is available at the following website:	
Radard, Joses, tanks, fittings, pipes. Lines, field valve, carbs.		Hydraulic Fluid	Hoses, master cylinders, cali pers.		: 			
		Coolant	Radiator, hoses, tanks, fittings, pipes.			o://www.mst-	usa.org/downloads/I-CLUC2_Inspection_Checklist.pdf	
		Fuel	Lines, fuel valve, carbs.					

# HAND SIGNALS

**1. Single File** arm and index finger extended straight up.



2. Double File arm with index and middle finger extended straight up.



3. Stop

arm extended straight down, palm facing back.



**4. Speed Up** arm extended 1 straight out, palm facing up, swing upward.



5. Slow Down

arm extended straight out, palm facing down, swing down to your side.



6. Follow Me arm extended straight up from shoulder, palm forward.



#### 7. You Lead/Come

arm extended upward 45 degrees, palm forward pointing with index finger, swing in arc from back to front.





#### 8. Hazard in Roadway

on the left, point with left hand; on the right, point with right foot.





# 9. Highbeam

tap on top of helmet with open palm down.



10. Fuel

arm out to side pointing to tank with finger extended.



#### 11. Comfort Stop

forearm extended, fist clenched with short up and down motion.



12. Refreshment Stop fingers closed, thumb to mouth.



### 13. Turn Signal On

open and close hand with fingers and thumb extended.





arm positioned as for right turn, forearm swung toward shoulder.





# FREQUENTLY ASKED QUESTIONS

- **Q.** What is "The Course for Motorcycle Riders?"
- A. The Basic Motorcycle Operator Training Course teaches the mental and physical skills that new, or inexperienced riders need for safe and enjoyable street riding. The Advanced Motorcycle Operator Training Course is for the more experienced rider and teaches more advanced street survival skills. Both courses are approved by the Department of Public Safety and offered by contracted sponsors participating in the Texas Motorcycle Operator Training Program.
- **Q.** Who is required to take the course?
- A. Everyone must complete a Department-approved Motorcycle Operator Training Course to be eligible to receive a motorcycle operator's license.
- **Q.** When and where are the courses offered?
- **A.** Course schedules vary both in days and times offered. Courses are available in more than 200 sites throughout the state.
- **Q.** What do you get out of the course?
- A. Course graduates receive a program patch, decal, and a course completion certificate (MSB-8) that indicates which course was attended. The MSB-8, annotated for the basic or advanced course, is recognized by many insurance

companies for a discount on motorcycle liability insurance and is proof of course completion for ticket dismissal. The MSB-8, annotated for the basic course, may be accepted to waive the driver's license road test.

- **Q.** What change was made affecting minors age 15 through 17?
- A. Minors 15 through 17 are not eligible for a road test waiver.
- **Q.** What change was made affecting adults age 18 through 24?
- A. Adults 18 through 24 who do not hold a current driver license of any class must successfully complete an Adult Driver Education course.
- **Q.** Who can become an instructor?
- A. To find out about the next available instructor training course, contact the Motorcycle Safety Unit at 800-292-5787
- **Q.** Where can I locate motorcycle specific laws?
- A. The DPS Motorcycle Safety Unit provides a Vehicle Descriptions and Requirements Chart on the unit's web page. For more information go to www.dps.texas.gov/msb/ documents/VDRchart.pdf

Diagrams and drawings used in this manual are for reference only and are not to correct scale for size of vehicles and distances.

# MOTORCYCLES MAKE SENSE – SO DOES PROFESSIONAL TRAINING

The Department of Public Safety's Motorcycle Operator Training Program was developed for all persons wishing to develop and improve their riding skills.

Experts provide professional training to prepare a rider for "real world" traffic.

This valuable training program teaches and improves activities such as:

- Effective turning
- Braking maneuvers
- Obstacle avoidance
- Protective apparel selection
- Traffic strategies
- Maintenance

For more information on the Basic or Advanced Motorcycle Operator Training Course, contact the Motorcycle Safety Unit at:

#### TEXAS MOTORCYCLE SAFETY UNIT TEXAS DEPARTMENT OF PUBLIC SAFETY

5805 N Lamar Blvd, Box 4087 Austin, Texas 78773-0257

512-424-2021 or 1-800-292-5787

Web Address: www.dps.texas.gov/msb E-mail: motorcycle.safety@dps.texas.gov



For information about driver licenses, call your local Driver License Office or Driver License Customer Service at 512-424-2600 or visit the Driver License web page www.dps.texas.gov/driverlicense

For information about motorcycle operator training courses, visit the Motorcycle Safety Unit's website at *www.dps.texas.gov/msb* and select FAQs and to find a course select Training Locations. Call the Motorcycle Safety Unit at 1-800-292-5787 or 512-424-2021 or email them at *motorcycle.safety@dps.texas.gov*