

66133

3N261
3N262
3N263

TO-18 OPTOCOUPLERS



05/29/03

Features:

- High Reliability
- Electrically similar to 4N47, 4N48, 4N49
- Base lead eliminated for improved noise immunity
- Rugged package
- +1kV electrical isolation
- Stability over wide temperature range

Applications:

- Eliminate ground loops
- Level shifting
- Line receiver
- Switching power supplies
- Motor control

DESCRIPTION

The **66133** contains an infrared LED optically coupled to a silicon phototransistor in a hermetic 4 lead TO-18 package. The collector of the phototransistor is electrically connected to the case. The internal base connection has been eliminated for improved noise immunity. The 3N261, 3N262 and 3N263 can be supplied to commercial or screened quality levels as well as to customer specifications.


ABSOLUTE MAXIMUM RATINGS

Input to Output Voltage	1000V
Emitter-Collector Voltage	7V
Collector-Emitter Voltage	40V
Reverse Input Voltage	2V
Input Diode Continuous Forward Current at (or below) 65°C Free-Air Temperature (see note 1)	40mA
Continuous Collector Current	20mA
Continuous Transistor Power Dissipation at (or below) 25°C Free-Air Temperature (see Note 2)	190mW
Storage Temperature	-55°C to +150°C
Operating Free-Air Temperature Range	-55°C to +125°C
Lead Solder Temperature (10 seconds max, 1/16" from case)	240°C

Notes:


1. Derate linearly to 125°C free-air temperature at the rate of 0.67 mA/°C.
2. Derate linearly to 125°C free-air temperature at the rate of 1.9 mW/°C.

Package Dimensions

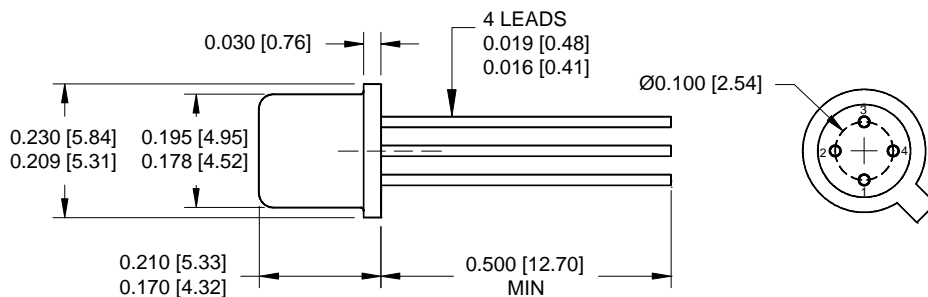

ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]

Schematic Diagram

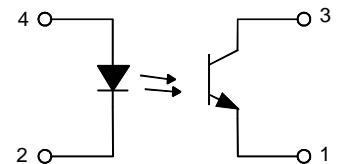

THE COLLECTOR IS IN ELECTRICAL CONTACT WITH THE CASE.

66133 **3N261**
 3N262
 3N263

TO-18 OPTOCOUPLEDERS

05/29/03

ELECTRICAL CHARACTERISTICS

INPUT LED

T_A = 25°C

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input Diode Static Reverse Current	I _R			100	nA	V _R = 2V
Input Diode Static Forward Voltage	V _F	0.8		1.5	V	I _F = 10mA

OUTPUT TRANSISTOR

T_A = 25°C

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	40			V	I _C = 1mA, I _F = 0
Emitter-Collector Breakdown Voltage	V _{(BR)ECO}	7			V	I _E = 100μA, I _F = 0
Collector Dark Current	I _D			100	nA	V _{CE} = 20V, I _F = 0mA

COUPLED CHARACTERISTICS

T_A = 25°C

PARAMETER		SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
On State Collector Current	3N261	I _{C(ON)}	0.5			mA	V _{CE} = 5V, I _F = 1mA
On State Collector Current	3N262	I _{C(ON)}	1			mA	V _{CE} = 5V, I _F = 1mA
On State Collector Current	3N263	I _{C(ON)}	2			mA	V _{CE} = 5V, I _F = 1mA
Collector-Emitter Saturation Voltage	3N261 3N262 3N263	V _{CE(SAT)}			0.3 0.3 0.3	V V V	I _F = 2mA, I _C = 0.5mA I _F = 2mA, I _C = 1mA I _F = 2mA, I _C = 2mA
Rise Time	3N261 3N262 3N263	t _r		10 10 15	20 20 25	μs μs μs	V _{CE} = 10V, I _F = 5mA, R _L = 100Ω
Fall Time	3N261 3N262 3N263	t _f		10 10 15	20 20 25	μs μs μs	V _{CE} = 10V, I _F = 5mA, R _L = 100Ω
DC Isolation Voltage		V _{IO}	1000			V	I _Q = 100 nA

RECOMMENDED OPERATING CONDITIONS:

PARAMETER	SYMBOL	MIN	MAX	UNITS
Input Current, Low Level	I _{FL}	0	10	μA
Input Current, High Level	I _{FH}	1	20	mA
Supply Voltage	V _{CE}	5	10	V


SELECTION GUIDE

PART NUMBER	PART DESCRIPTION
66133-001	3N261, Commercial
66133-002	3N262, Commercial
66133-003	3N263, Commercial
66133-101	3N261, Screened
66133-102	3N262, Screened
66133-103	3N263, Screened


05/29/03

PARAMETER MEASUREMENT INFORMATION

ADJUST AMPLITUDE OF INPUT PULSE FOR $I_{F(ON)} = 5 \text{ mA}$

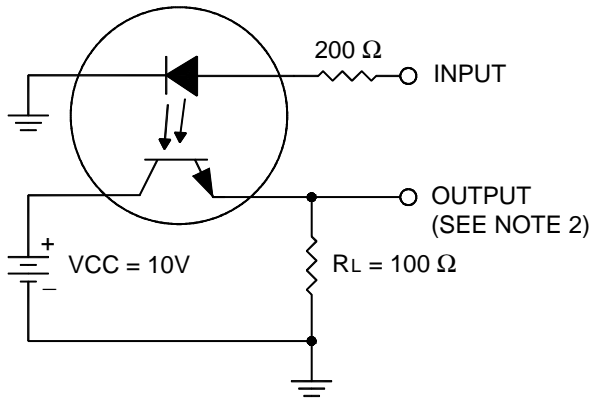

TEST CIRCUIT

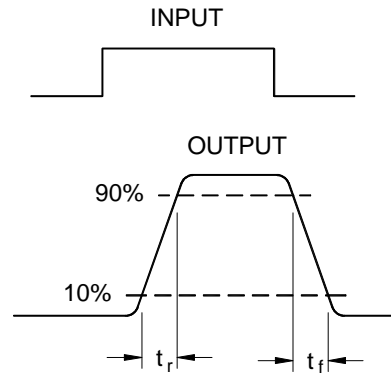


VOLTAGE WAVEFORM


- NOTES: 1. The input waveform is supplied by a generator with the following characteristics: $Z_{OUT} = 50 \Omega$, $t_r \leq 15 \text{ ns}$, Duty cycle $\approx 1\%$, $t_w = 100 \mu\text{s}$.
 2. Waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq 12 \text{ ns}$, $R_{IN} \geq 1M\Omega$, $C_{IN} \leq 20 \text{ pF}$

TYPICAL CHARACTERISTICS

INPUT DIODE FORWARD CONDUCTION CHARACTERISTICS

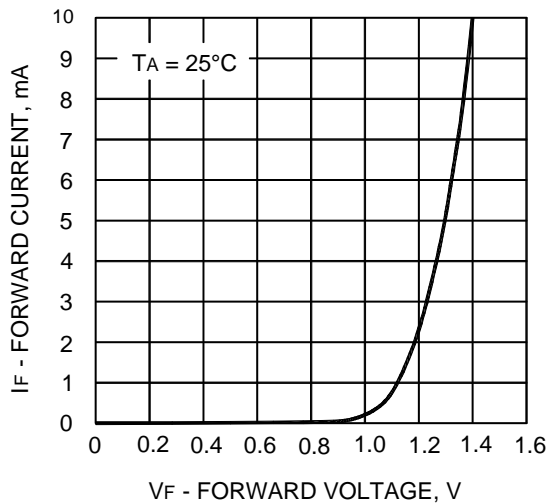

3N262
 COLLECTOR CURRENT
 vs
 INPUT DIODE FORWARD CURRENT

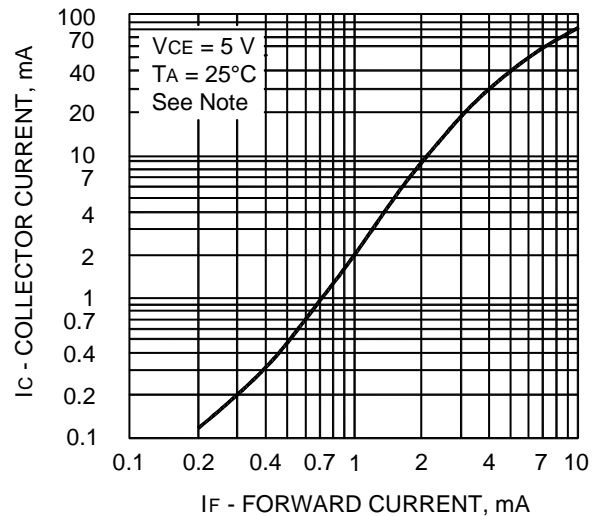

NOTE: This parameter was measured using pulse techniques. $t_w = 100 \mu\text{s}$, duty cycle = 1%.

05/29/03

TYPICAL CHARACTERISTICS (CONTINUED)

