


LUMINOSA

TRACK / SURFACE

made in
HOLLAND

**INTER
NOVA**
PROFESSIONAL LIGHTING

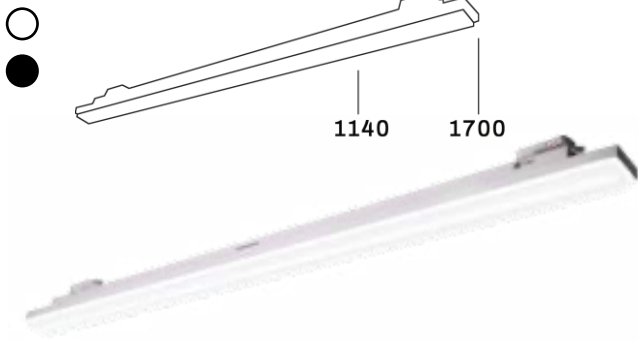

Housing
RAL colour
Fixture type
Module
Driver
Lumen output

Powder coated steel
9004 (Black), 9003 (White)
3-phase track light
Osram V-S LED Linear
Osram V-S comfort line
1140mm: 4500lm, 6000lm
1700mm: 6000lm, 9000lm
3000K, 4000K, 5000K, 6500K
>80Ra, >90Ra
30°, 60°, 90°, 110°, Retail symmetric and a-symmetric
Powergear® 3-phase adapter included
L80B10 >70.000 / L90B50 >50.000h
RG1 unlimited
> 0.9
> 90%
3 SDCM
5 years warranty on LED module and driver

CCT
CRI
Beam angles
Adapter
Expected Lifetime
Photobiological safety
Power factor
LOR
Colour consistency
Warranty

Net Weight	Dimensions carton L x W x H	Qty outer carton
1665 grams	116 x 8 x 7 cm	6
2415 grams	172 x 8 x 7 cm	6

LED MODULES

Standard

OPTIONS

Dimmable Casambi



LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Vossloh-Schwabe Linear LED	4500lm	25W	181	830	>80Ra						
Vossloh-Schwabe Linear LED	4500lm	23W	196	840, 850, 865	>80Ra						
Vossloh-Schwabe Linear LED	4500lm	31W	145	930	>90Ra						
Vossloh-Schwabe Linear LED	4500lm	27W	164	940, 950	>90Ra						
Vossloh-Schwabe Linear LED	6000lm	33W	181	830	>80Ra						
Vossloh-Schwabe Linear LED	6000lm	31W	196	840, 850, 865	>80Ra						
Vossloh-Schwabe Linear LED	6000lm	41W	145	930	>90Ra						
Vossloh-Schwabe Linear LED	6000lm	37W	164	940, 950	>90Ra						
Vossloh-Schwabe Linear LED	9000lm	50W	181	830	>80Ra						
Vossloh-Schwabe Linear LED	9000lm	46W	196	840, 850, 865	>80Ra						
Vossloh-Schwabe Linear LED	9000lm	62W	145	930	>90Ra						
Vossloh-Schwabe Linear LED	9000lm	55W	164	940, 850	>90Ra						

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.


The power of the complete fixture will be slightly higher due to the power consumption of the driver.

³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.

It all starts with light

ARTICLE CODE STRUCTURE

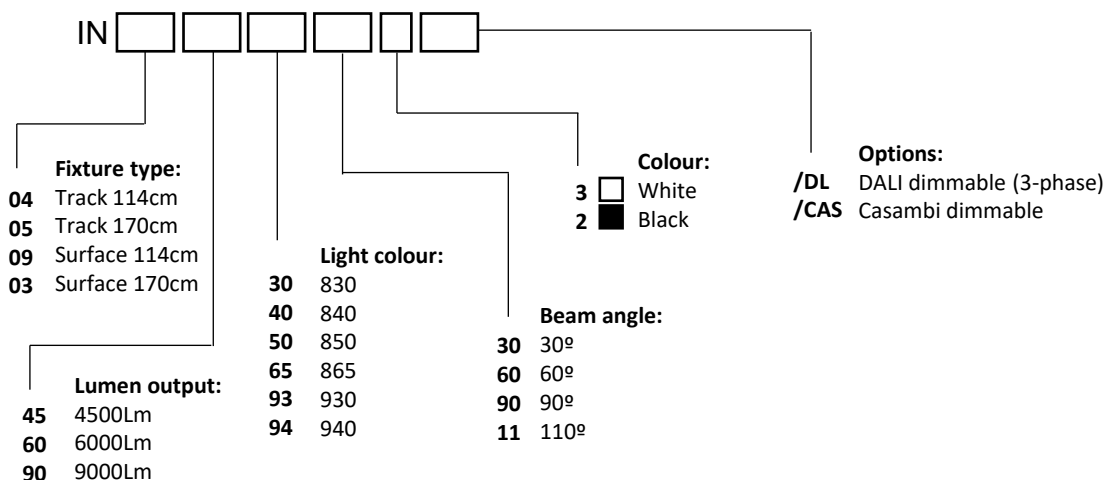

POLAR DIAGRAMS

30°







60°

90°

110°

Retail Symmetric

Retail a-symmetric



It all starts with light