


Housing	Aluminium, die cast
RAL colour	9004 (Black), 9003 (White)
Fixture type	Recessed
Module	Philips Fortimo SLM LED module
Driver	Osram TRIAC dimmable driver
Lumen output	800lm, 1400lm
CCT	2700K, 3000K, 4000K
CRI	>80Ra, >90Ra
Beam angles	40°
Cut out size	L98 x W98 x H124
Expected Lifetime	L80B10 >70.000 / L90B50 >50.000h
Photobiological safety	RG1 unlimited
Power factor	> 0.9
LOR	> 90%
Colour consistency	3 SDCM
Warranty	5 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
565 grams	14 x 14 x 16 cm	27

LED MODULES



OPTIONS




LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Philips Fortimo SLM G7	800lm	7W	114	830	>80Ra						
Philips Fortimo SLM G7	800lm	7W	114	927, 940PW	>90Ra						
Philips Fortimo SLM G7	1400lm	13W	108	830	>80Ra						
Philips Fortimo SLM G7	1400lm	13W	108	927, 940PW	>90Ra						


LED modules
 Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K
 Premium White (PW): for fresh white and depth of colour in retail environments
 1) Lumen output of LED module (COB)
 2) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.
 The power of the complete fixture will be slightly higher due to the power consumption of the driver.
 3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.
 Technical data can be changed by Internova without prior notice.

It all starts with light

ARTICLE CODE STRUCTURE

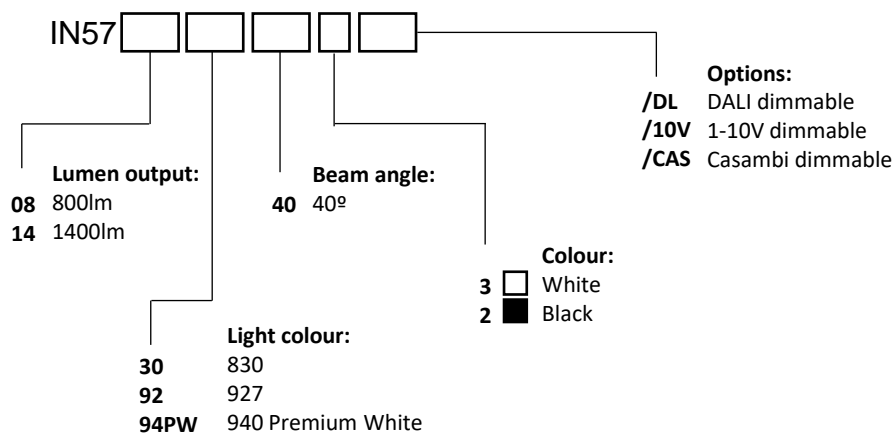

POLAR DIAGRAMS

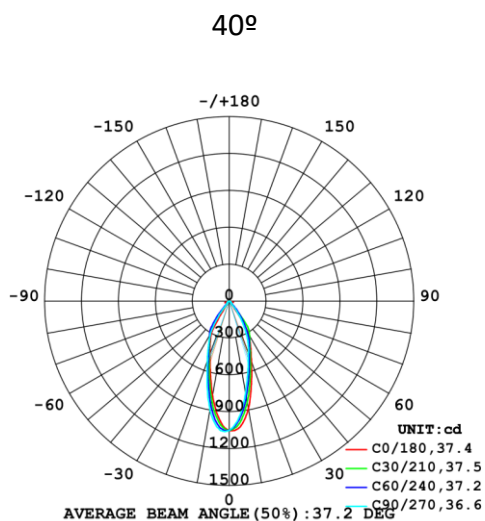

It all starts with light