


NTN BEARING CORPORATION OF AMERICA

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.

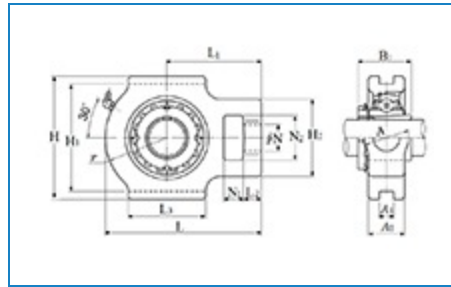
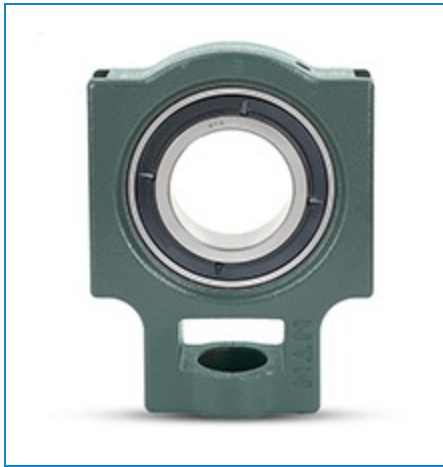
Phone: 847-298-7500

Fax: 847-699-9744

Toll Free: 800-323-2358

Email: mkt@ntnamerica.com
Website: www.ntnamericas.com

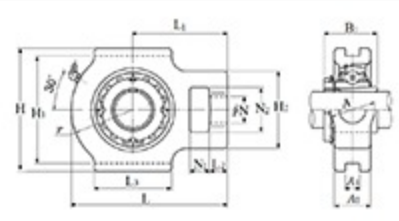
Item # UKT210D1 (when used with H2310X), Take-Up Unit, Cast Housing, Adapter, UKT Type


[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)
Order Now
Ordering Options
FIND A DISTRIBUTOR
CONTACT NTN CUSTOMER SUPPORT SPECIALIST
ORDER THROUGH NTN DOL (AUTHORIZED DISTRIBUTORS ONLY)
Technical Specifications
Type

Take-Up Unit

Bearing Type	Ball Bearing
Locking Device	Adapter
Seal Type	Contact
Seal Material	Nitrile Rubber
Bearing Number	UK210D1
Housing Number	T210D1
Housing Material	Cast Iron
Dynamic Load Rating	7850 lbf 35000 N 35.00 kN
Static Load Rating	5200 lbf 23200 N 23.20 kN
Weight	5.950 lb 2.700 kg
Operating Temperature Range	-40 to 250 °F -40 to 120 °C
Lubrication	Relubricatable

Dimensional Specifications



Take-Up Unit, Cast Housing, Adapter, UKT Type - Dimensions

d	1.7717 in 45.000 mm
L	5.9375 in 151.0 mm

H	4.5937 in 117.0 mm
H1	4.0156 in 102.0 mm
H2	3.2812 in 83.0 mm
L1	3.6250 in 92.0 mm
L2	0.7187 in 18.0 mm
L3	3.3750 in 86.0 mm
N	1.1562 in 29.0 mm
N1	0.7500 in 19.0 mm
N2	1.9375 in 49.0 mm
A	1.9375 in 49.0 mm
A1	0.6299 in 16.0 mm
A2	1.4687 in 37.0 mm
r	2.3125 in 59.0 mm
B1	2.1650 in 55.000 mm
F	0.2323 in 5.900 mm
Notes	Sales drawing reflects "Bore Size w/o Adapter". They do not show the "d" dimension, which is the bore size with adapter