



NTN BEARING CORPORATION OF AMERICA

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.

Phone: 847-298-7500



Fax: 847-699-9744

Toll Free: 800-323-2358

Email: mkt@ntnamerica.com

Website: www.ntnamericas.com

Item # UKT211D1 (when used with H2311X), Take-Up Unit, Cast Housing, Adapter, UKT Type

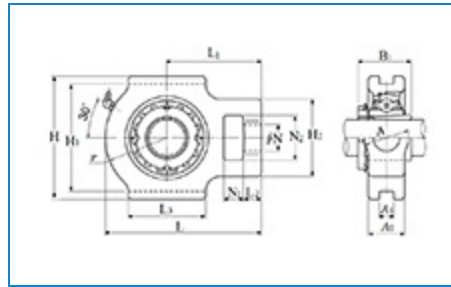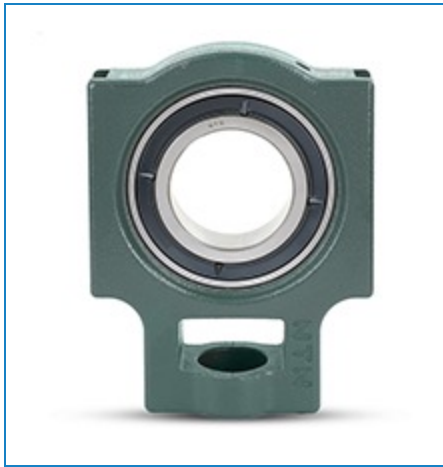

[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)

Order Now

Ordering Options

FIND A DISTRIBUTOR

CONTACT NTN CUSTOMER SUPPORT SPECIALIST

ORDER THROUGH NTN DOL (AUTHORIZED DISTRIBUTORS ONLY)


Technical Specifications

Type

Take-Up Unit

Bearing Type	Ball Bearing
Locking Device	Adapter
Seal Type	Contact
Seal Material	Nitrile Rubber
Bearing Number	UK211D1
Housing Number	T211D1
Housing Material	Cast Iron
Dynamic Load Rating	9800 lbf 43500 N 43.50 kN
Static Load Rating	6550 lbf 29200 N 29.20 kN
Weight	9.040 lb 4.100 kg
Operating Temperature Range	-40 to 250 °F -40 to 120 °C
Lubrication	Relubricatable

Dimensional Specifications

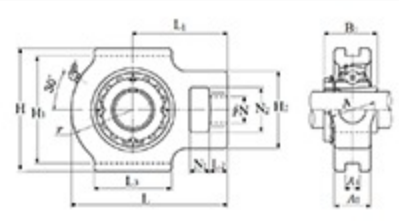

Take-Up Unit, Cast Housing, Adapter, UKT Type - Dimensions

d	1.9685 in 50.000 mm
L	6.7187 in 171.0 mm

H	5.7500 in 146.0 mm
H1	5.1250 in 130.0 mm
H2	4.0313 in 102.0 mm
L1	4.1875 in 106.0 mm
L2	0.8125 in 21.0 mm
L3	3.7500 in 95.0 mm
N	1.3750 in 35.0 mm
N1	0.9687 in 25.0 mm
N2	2.5312 in 64.0 mm
A	2.5312 in 64.0 mm
A1	0.8661 in 22.0 mm
A2	1.5000 in 38.0 mm
r	2.5625 in 65.0 mm
B1	2.3230 in 59.000 mm
F	0.2362 in 6.000 mm
Notes	Sales drawing reflects "Bore Size w/o Adapter". They do not show the "d" dimension, which is the bore size with adapter