




► HEAD - MAST ADAPTER INGESCO

Head Mast adapter



► applications

Necessary to connect the air terminal receiver to the mast.
Facilitates the connection of the head to the conducting network.
It is possible to set any model of air terminal:

- ESE
- Franklin

► features and benefits


- Made of Cu/Zn alloy (brass).
- Stainless steel hardware.
- Safety fixing with 2 M8 screws.
- Corrosion resistance and guaranteed durability, through the use of materials such as brass and stainless steel.

► technical specifications

Head mast adapter	Ref.	Material	H (mm)	D1 (mm)	M1	D2 (mm)	A (mm)	B (mm)	Weight (g)
1" Ø16 round	111033	Cu/Zn	80	26	M16	12	-	-	303
1'1/4" Ø16 round	111032	Cu/Zn	80	35,5	M16	12	-	-	655
1'1/2" Ø16 round	111022	Cu/Zn	80	41	M16	12	-	-	775
2" Ø16 round	111025	Cu/Zn	80	53	M16	12	-	-	1305
1" Ø20 round	111019	Cu/Zn	80	26	M20	12	-	-	288
1'1/4" Ø20 round	111011	Cu/Zn	80	35,5	M20	12	-	-	640
1'1/2" Ø20 round	111012	Cu/Zn	80	41	M20	12	-	-	760
2" Ø20 round	111013	Cu/Zn	80	53	M20	12	-	-	1290
1'1/4" Ø16 tape	111035	Cu/Zn	80	35,5	M16	-	19	25	655
1'1/2" Ø16 tape	111036	Cu/Zn	80	41	M16	-	19	30	775
2" Ø16 tape	111037	Cu/Zn	80	53	M16	-	19	45	1305
1'1/4" Ø20 tape	117017	Cu/Zn	80	35,5	M20	-	19	25	640
1'1/2" Ø20 tape	111014	Cu/Zn	80	41	M20	-	19	30	760
2" Ø20 tape	111018	Cu/Zn	80	53	M20	-	19	45	1290

► mounting scheme

- Fixing the cable conductor or tape with allen M8 screws for cable model, and two hexagonal head screws for tape model.
- Insertion of the air terminal shaft with M16x1,5 thread.
- Insertion of mast by the bottom and fixing with an hexagonal head the mast, the adapter head-mast and the air terminal shaft (see mounting scheme).

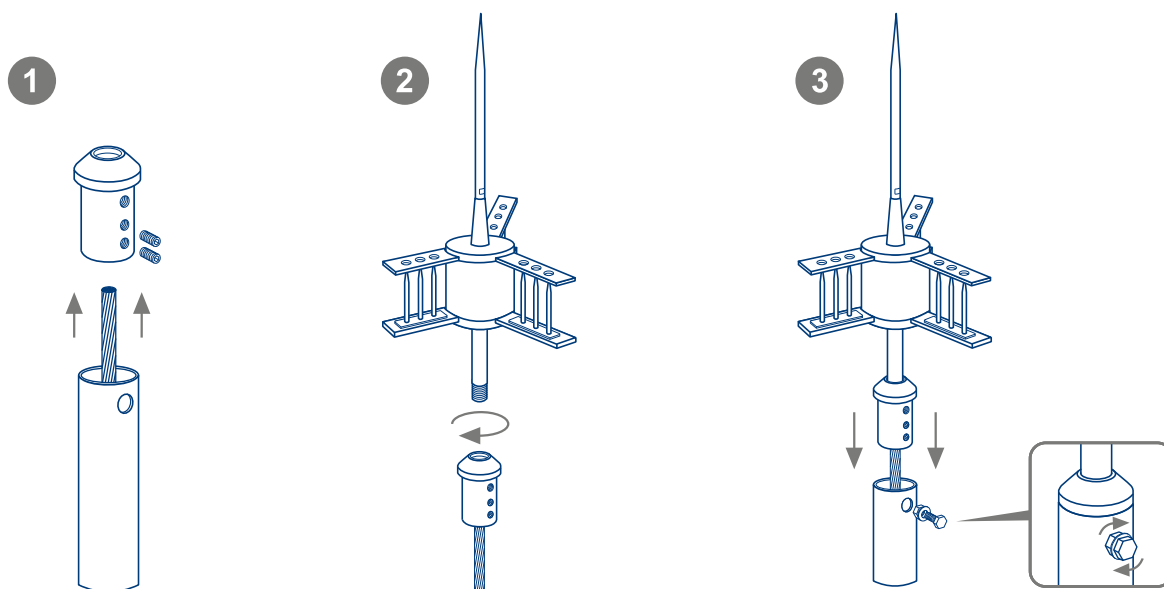

► standards and test

Applications norms:

- IEC 62305
- IEC 62.561/1



DENA DESARROLLOS SL

Duero 5 | 08223 Terrassa | Barcelona | Spain
T 937 360 305 | T (+34) 937 360 314
F 937 360 312
central@ingesco.com



**HEAD - MAST
ADAPTER INGESCO**