


## STAINLESS STEEL NARROW VENT-HOOD FOR WALK-AROUND DARKROOM SINKS

THE "SNVHWA" VENT-HOOD SAFELY REMOVES CHEMICAL FUMES CREATED AT A DARKROOM WALK-AROUND SINK. THIS VENT-HOOD IS CENTERED OVER THE SINK AND DRAWS FUMES TO THE CENTER OF THE SINK AND AWAY FROM THE FACES OF STUDENTS. THE TOP OF THE VENT-HOOD PROVIDES A HANDY 10" WIDE UTILITY SHELF FOR TIMERS & ACCESSORIES. THE ENTIRE HOOD IS MADE OF 316/304 STAINLESS STEEL (IN GAUGES RANGING FROM 18-14) INERT TO ALL PHOTO DARKROOM CHEMICALS. THIS VENT-HOOD IS SUPPORTED FROM THE FLOOR, OR SINK, OR HUNG BY STAINLESS STEEL RODS.

- Above ceiling ductwork & exhaust fans are not supplied because of various building configurations
- Above ceiling ductwork & exhaust fans are not supplied by others due to various building configurations

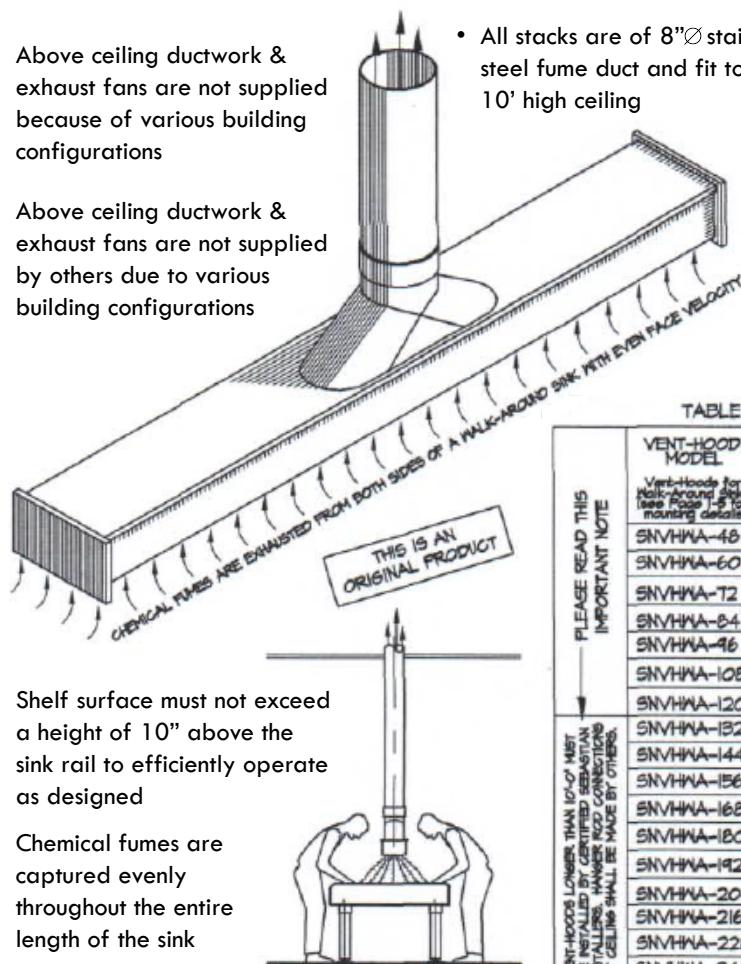

- Shelf surface must not exceed a height of 10" above the sink rail to efficiently operate as designed
- Chemical fumes are captured evenly throughout the entire length of the sink

- All stacks are of 8"Ø stainless steel fume duct and fit to a 10' high ceiling

- Designed & lab-tested by photomechanical engineers, teachers of photography
- Adjustable damper plates at the fume entrance ports provide for on-site adjustment by air-balancing engineers
- These vent-hoods are made to cover walk-around sinks from 4 to 20 feet in length. See Catalog pgs 1-5 for various ways to support these hoods

TABLE FOR DETERMINING cfm EXHAUST REQUIREMENTS

VENT-HOOD MODEL Vent-Hoods for Walk-Around sinks (see page 1-5 for mounting details)	OVERALL HOOD LENGTH	OVERALL SINK LENGTH	cfm Required at Intake of each Stack					NUMBER OF STACKS 8"Ø SINKS
			cfm req'd for 24" wide sink	cfm req'd for 30" wide sink	cfm req'd for 36" wide sink	cfm req'd for 42" wide sink	cfm req'd for 48" wide sink	
SNVHWA-48	4'	4'	400	500	600	700	800	0.22
SNVHWA-60	5'	5'	500	625	750	875	1,000	0.31
SNVHWA-72	6'	6'	600	750	900	1,050	1,200	0.55
SNVHWA-84	7'	7'	700	875	1,050	1,225	1,400	0.69
SNVHWA-96	8'	8'	800	1,000	1,200	1,400	1,600	0.85
SNVHWA-108	9'	9'	900	1,125	1,350	1,570	1,800	1.02
SNVHWA-120	10'	10'	1,000	1,250	1,500	1,750	2,000	1.16
SNVHWA-132	11'	11'	1,100	1,375	1,625	1,875	2,100	0.41
SNVHWA-144	12'	12'	1,200	1,500	1,800	2,000	2,200	0.55
SNVHWA-156	13'	13'	1,300	1,650	1,975	2,200	2,400	0.60
SNVHWA-168	14'	14'	1,400	1,750	2,050	2,225	2,400	0.73
SNVHWA-180	15'	15'	1,500	1,875	2,250	2,425	2,600	0.78
SNVHWA-192	16'	16'	1,600	2,000	2,400	2,600	2,800	0.85
SNVHWA-204	17'	17'	1,700	2,125	2,500	2,700	2,900	0.91
SNVHWA-216	18'	18'	1,800	2,250	2,625	2,825	3,000	1.02
SNVHWA-228	19'	19'	1,900	2,375	2,750	2,975	3,100	1.02
SNVHWA-240	20'	20'	2,000	2,500	2,875	3,100	3,200	1.16

NOTE: VENT-HOODS LONGER THAN 10' ARE SUPPLIED IN TWO EQUAL HALVES, AND ARE DOWELED & BOLTED TOGETHER. EACH ASSEMBLED 10' HOOD HAS TWO 8"Ø STAINLESS STEEL STACKS.