


LUXURY VINYL

LIVING QUARTERS
fiberglass sheet

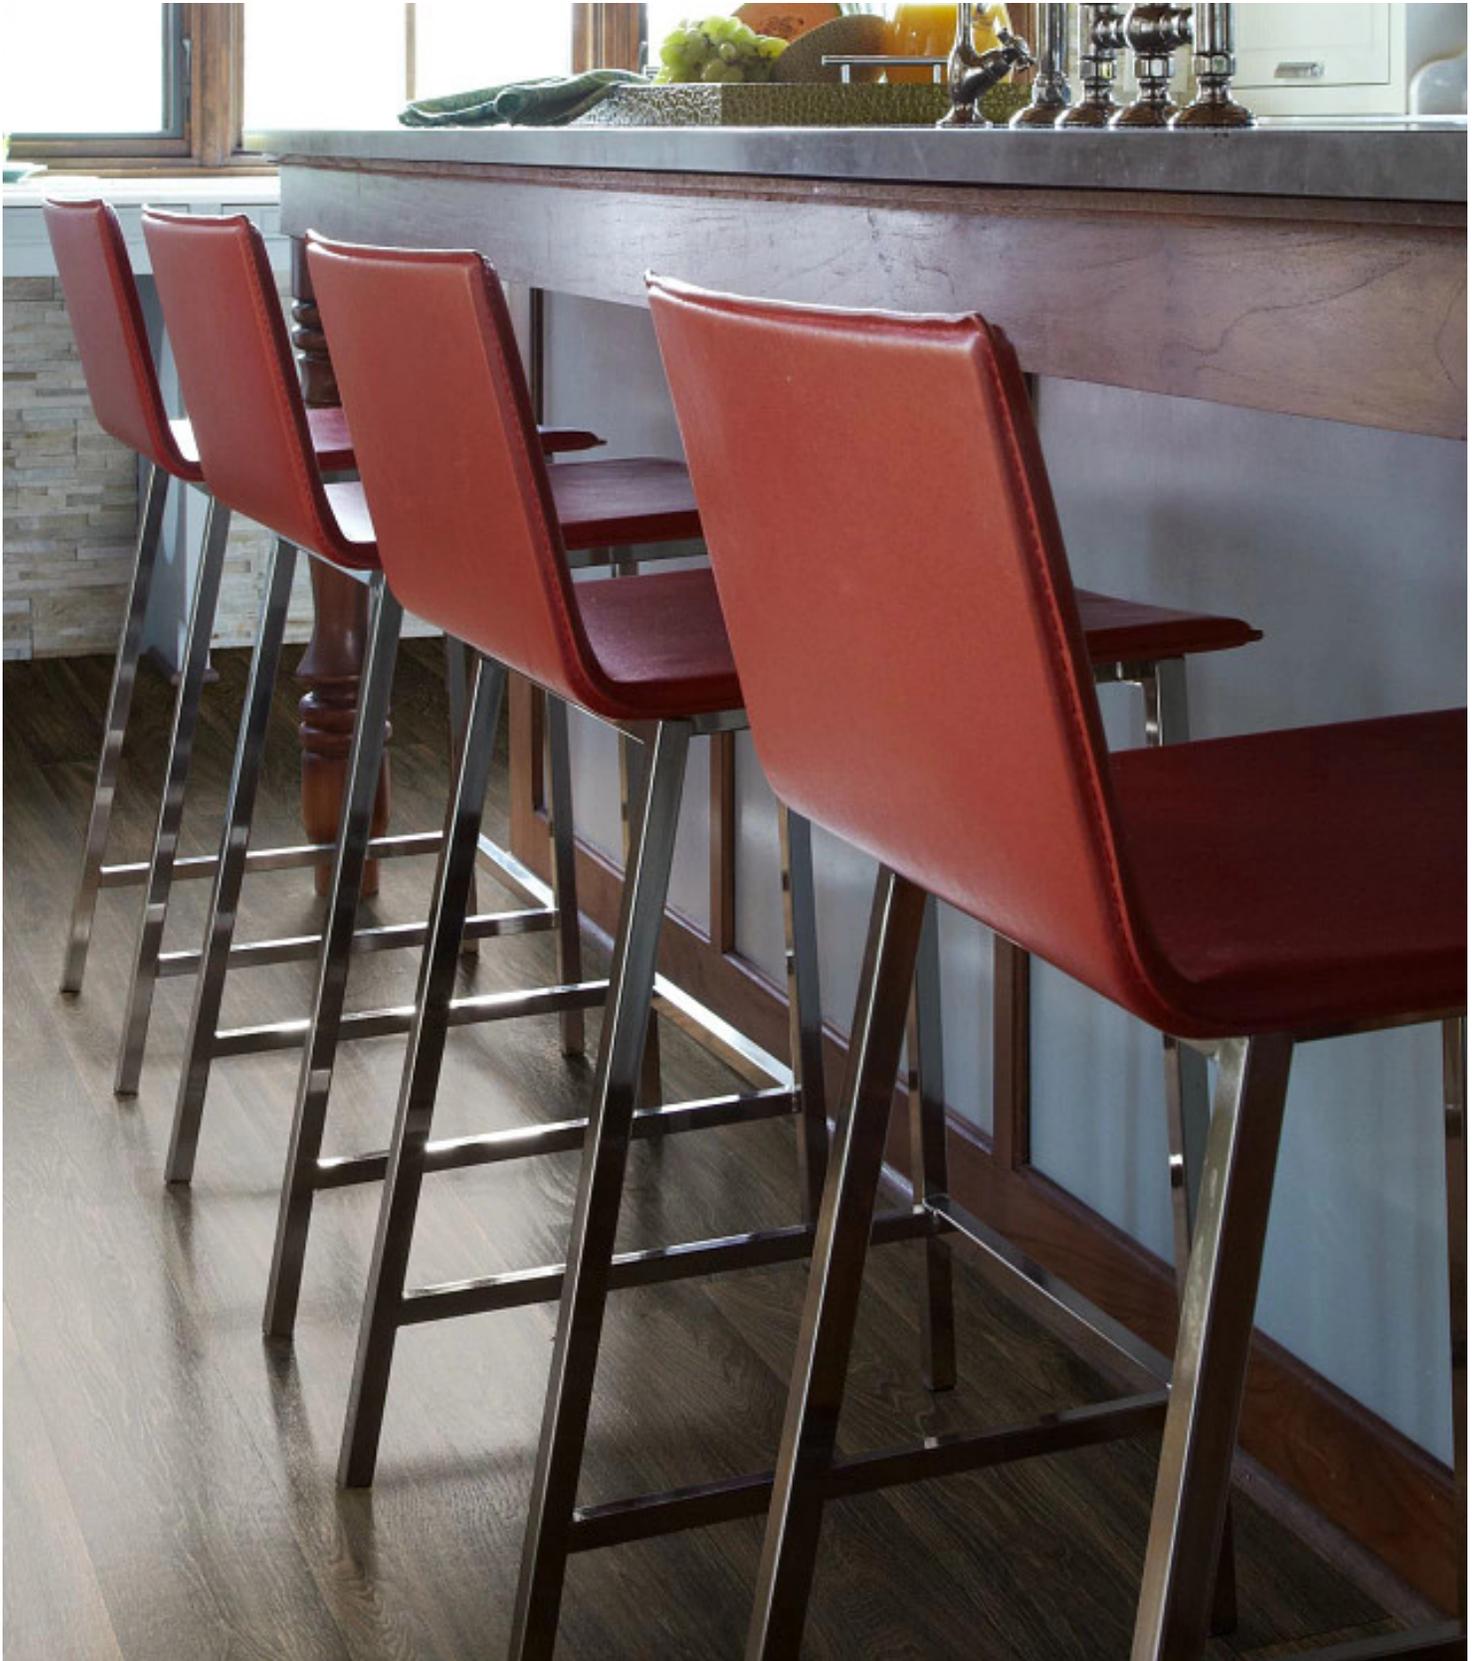

707 Dakota

shawbuilderflooring.com




	US Units	Metric Units
Style Number	VG055	
Construction	Residential Resilient - Sheet	
Profile	Direct Glue	
Overall Thickness	0.055"	1.399 mm
Wear Layer Thickness	10 mil (0.01")	0.3 mm
Finish	Opticlean Urethane	
Installation	Glue	
Installation Grade	All Levels of the Home	
Environmental	FloorScore® Certified	
Residential Warranty	5 Years DuraTru Residential Limited Warranty	
Smoke Density (ASTM E662, Flaming Mode)	Passes, <450	
Radiant Panel (ASTM E648)	Passes, Class I	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Features

Realistic designs to capture the essence of the country's heartland. Traditional warm greys and toned browns that give the feeling of home-colors that stood the test of time and weather.

Colors

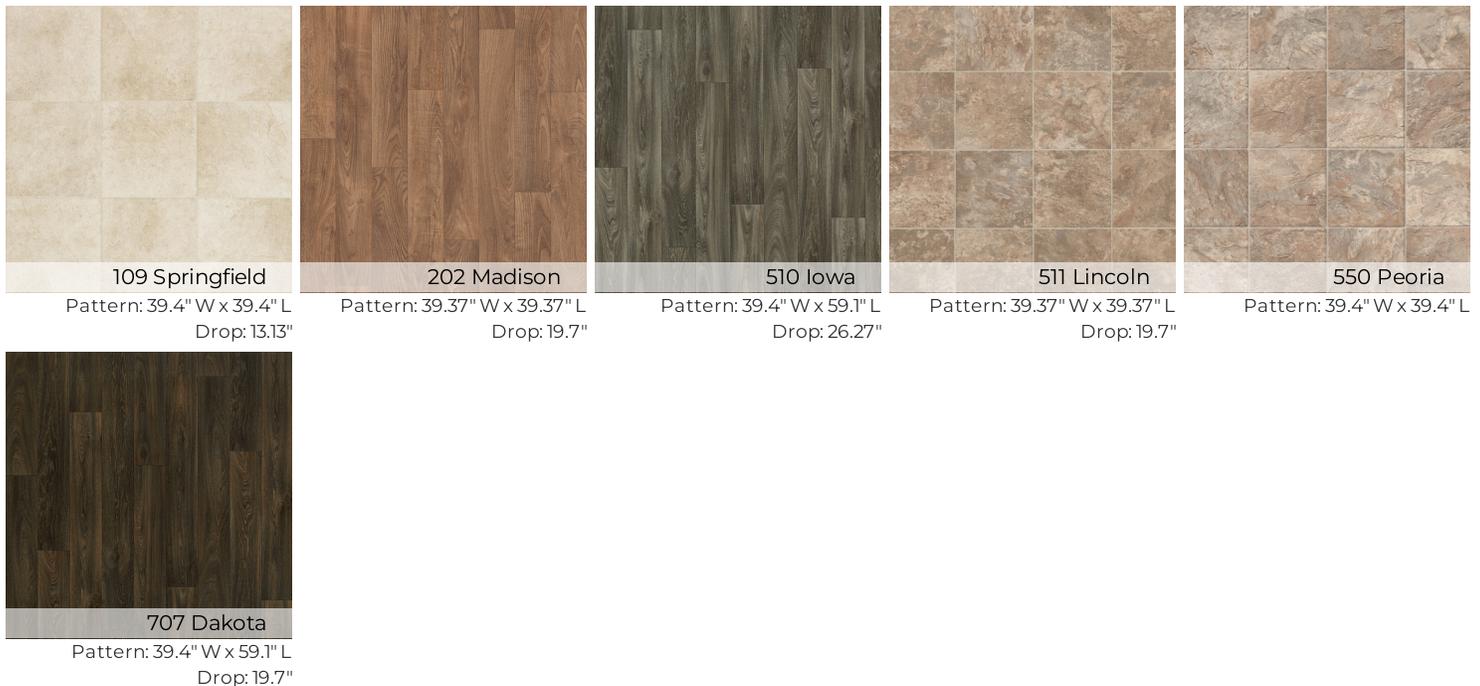

Suggested Adhesive

Style Name	Style Number
SHAW 350 PS ADH 4G	024VS
124VS	VS053
053VS	SHAW SV-1200 1 GAL
VS186	100BA
SHAW SV-1200 4 GAL	101SA