


Basic Data


Product Number	Wattage	Color Temp.	Voltage	Lumens	Working Hours	CRI
EX-20W A2N50D120	20	5000K	AC100-277V	2800	5 years	70
EX-40W A2N50D120	40	5000K	AC100-277V	5600	5 years	70
EX-60W AN50D120	60	5000K	AC100-277V or AC200-480V	8400	5 years	70
EX-80W AN50D120	80	5000K	AC100-277V or AC200-480V	11200	5 years	70
EX-100W AN50D120	100	5000K	AC100-277V or AC200-480V	14000	5 years	70
EX-150W A3N50D120	150	5000K	AC100-277V or AC200-480V	21000	5 years	70
EX-180W A3N50D120	180	5000K	AC100-277V or AC200-480V	25200	5 years	70
EX-200W A3N50D120	200	5000K	AC100-277V or AC200-480V	28000	5 years	70

A,A2,A3 product code "Y"=D or N:Dimmable or non-dimmable "D"=Beam angle, D40 for 40°,D60 for 60°,D90 for 90°, D120 for 120°

Dimensions

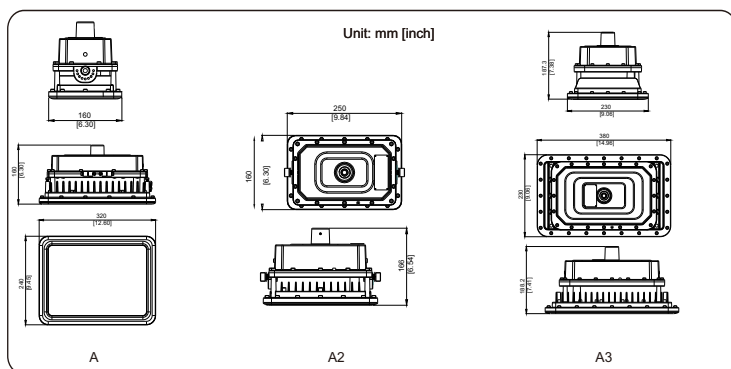


Lighting Distribution

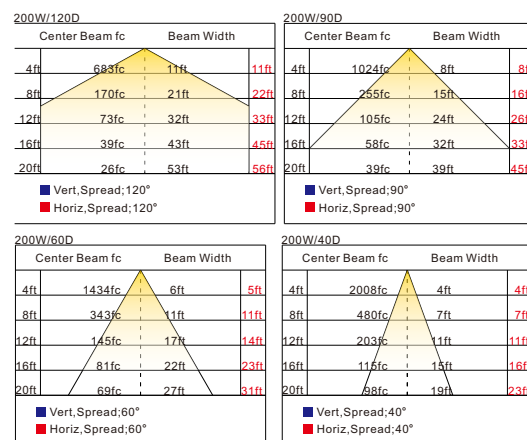


Approvals

Marking Atex	Ex II2 G Ex db IIB T6 Gb II2 D Ex db IIIC T80 Db IP66
Marking IECEx	Ex db IIB T6 Gb Ex db IIIC T80 Db IP66
Marking UL844 (North American)	Class I,Division 2,Groups A,B,C,D Class II,Division 1,Groups E,F,G Class II,Division 2,Groups E,F,G Class III
Marine Marking	UL 1598A ABS and DNV Type Approved
Other Rating	IP 66 IK 10


Installation




Ceiling Bracket Mounting



Pole Mounting



Wall Bracket Mounting



Wall Pole Mounting