



JVM serial miniature circuit breaker has high breaking capacity, the whole series from 1A to 63A can go up to 10KA, and has high breaking potentiality.

Rated frequency 50/60Hz and rated current up to 63A for protection and control of circuit against overload and short circuit in commercial, household and electric equipment installation. The product is suitable for non-frequently making and breaking operation.

The product, free of maintenance, can be operated by non-professionals.


Installation class: II or III.

Pollution class 2.

DIN Rail mounting type.

UL 1077

Product shall be installed vertically at the place where there shall be no severe impact and vibration. The product is switched on when the handle is at upper position.

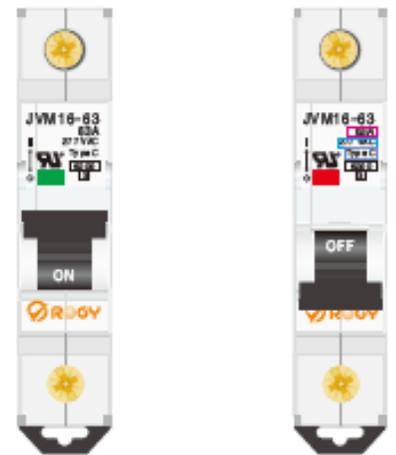

CE IEC 60898
10000A AT 230/400 VAC
RU Cat. No. JVM16-63
UL 1077 E340526
120/240 VAC INT RATING 10000A
277/480 VAC INT RATING 6000A

LOAD

LINE

Type	JVM16-63 MCB
Number of poles	1P、1P+N、2P、3P、3P+N、4P
Rated Current(In)	1、2、3、4、6、10、16、20、25、32、40、50、63A
Rated Voltage(Un)	AC 230(240)/400(415)V
Rated frequency	50(60)Hz
Curve	B、C、D
Short-circuit breaking capacity(Icn)	10000A (10kA)
Magnetic releases operate	B curve: between 3 and 5 In C curve: between 5 and 10 In D curve: between 10 and 20 In
Endurance	≥ 4000
Terminal protection	IP2LX