


**HÜPER OPTIK®**  
Nano-Ceramic Window Films



The Smarter Choice:  
Nano-Ceramic Films

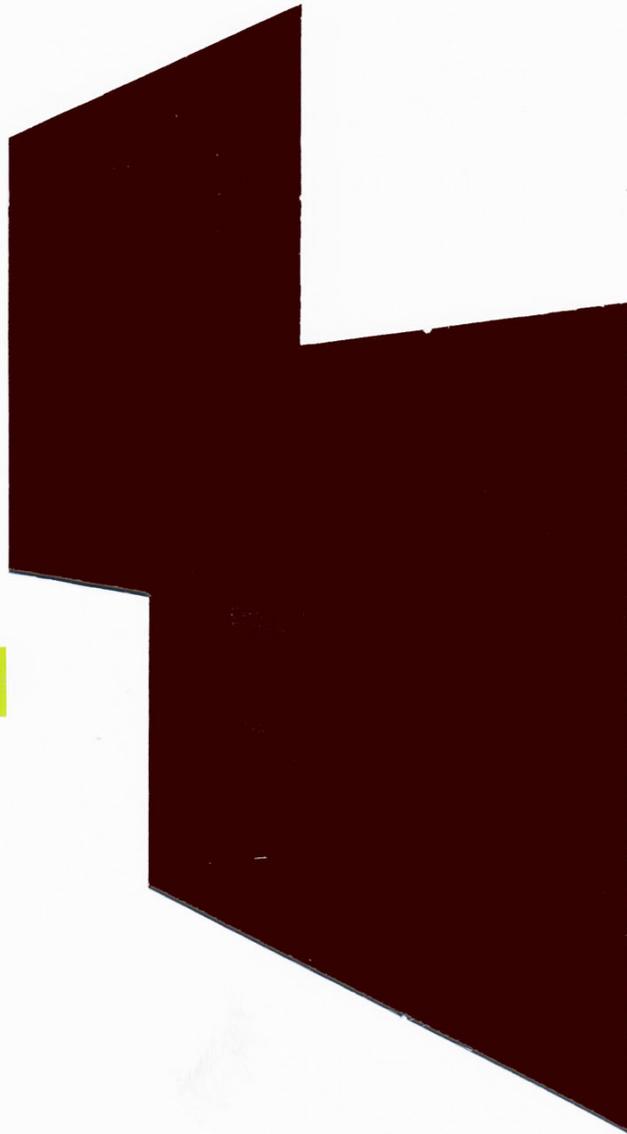

### HÜPER CERAMIC 40

Visible Light Transmission (%)	42
Visible Light Reflectance (%)	9
Shading Coefficient	0.52
Solar Heat Gain Coefficient	0.45
Total Solar Transmission (%)	29
Infrared Rejection (%)	80
UV Light Rejection (%)	99.9
Total Solar Energy Rejected (%)	55
Glare Reduction (%)	53

[www.huperoptikusa.com](http://www.huperoptikusa.com)



Performance data is based on this film being applied to the inside of 3mm clear glass. All data calculated using the definitions and equations in ISO9050 & ASHARE Handbook. The data is subject to variations within industry standards.  
Copyright © 2008 Hüper Optik® USA ([www.huperoptikusa.com](http://www.huperoptikusa.com)), 5821 West Sam Houston Parkway North Suite 400, Houston, TX 77041; phone: 888.296.3456; fax: 832.467.1190



HSPE-C40



Meister Keramische Technologie