


Auto Activating Technology. Don't Drop the Ball!



SlidePro Friction Breaking Technology

SlidePRO Friction Breaking System Strengths

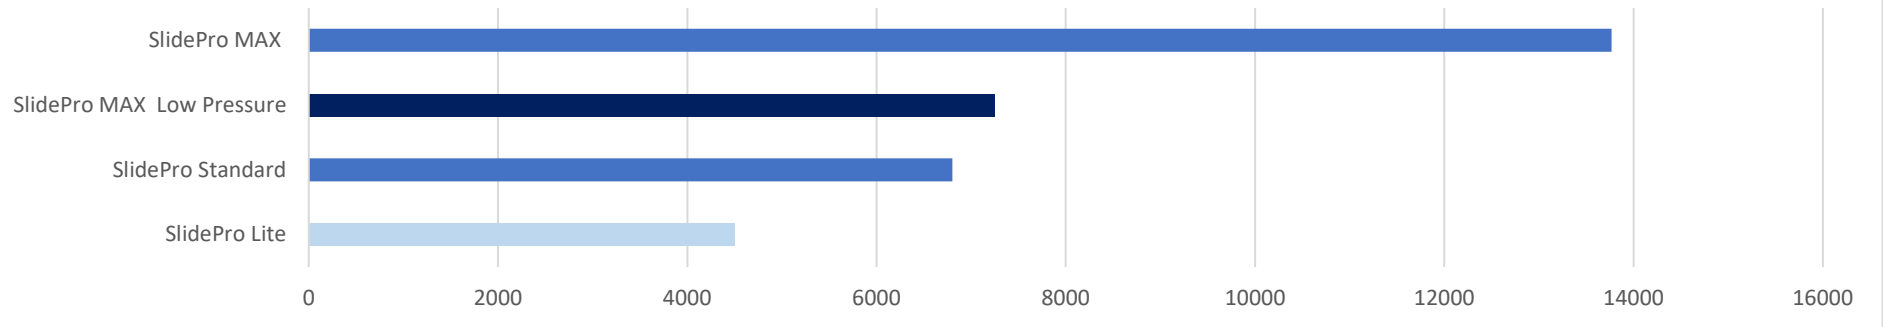

Friction Breaking Setup	Length	Pressure Drop	Placement from Bit	Friction Breaking Strength	Auto Activation
SlidePro Lite	6.32 m	3,800 kPa	300 - 500 m	4,500daN (9,000 lbs)	No
SlidePro Standard	7.92 m	3,800 kPa	700 - 900 m	6,800 daN (14,960 lbs)	Yes
SlidePro MAX Low Pressure	10.52 m	2,000 kPa	700 - 1000 m	7,246 daN (15,941 lbs)	Yes
SlidePro MAX	10.52 m	3,800 kPa	1400 - 1900 m	13,768 daN (30,289 lbs)	Yes

Notes

Connections DS40

Auto Activation feature is available upon request. No ball or dart is required.

Deactivated SlidePro operates as a Lite tool in vertical until fully activated at KOP

Contacts:

Jason Bjornson

403 512 0572

Mission Drilling

SlidePro[®] MAX
AUTO - ACTIVATING TECHNOLOGY