


WHEEL STOPPERS

They are designed not to cause any damage to vehicles. Rubber wheel stopper gives the driver a clear warning that their rear wheels are parked correctly. They are supplied with pre-drilled holes for concrete or asphalt installations.

The wheel stoppers reduce the risk of accidental damage to columns, concrete pillars and lighting columns, etc. They are manufactured in **Solid and Hollow** types for a tough service life. The product absorbs impact and quickly recovers back to its original shape when the load is removed.

They are cut to the exact size to suit your site requirements. The product can be delivered in an **All Black with a Bright Yellow Strip** rubber finish.

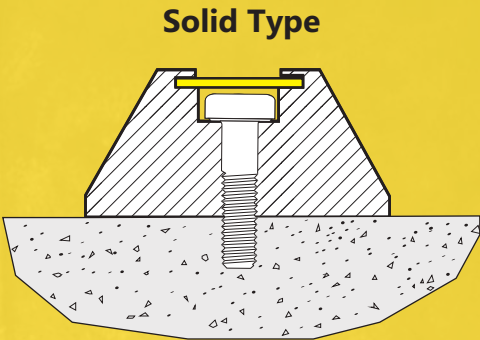

Sizes available in mm:
Overall Dimensional Tolerances $\pm 5\%$.
Available in variable lengths.

Code	Width	Thickness
WSS130100	130	100
WSS140100	140	100
WSS150130	150	130
WSS200100	200	100

Code	Width	Thickness
WSH130100	130	100
WSH140100	140	100
WSH150130	150	130
WSH200100	200	100

